



The details.

C500 Utensil



Two utensil baskets supplied

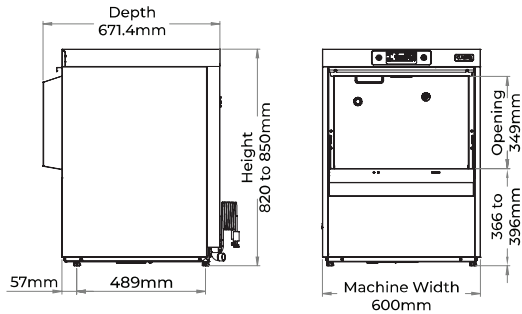

Add optional plate baskets to extend the wash capabilities of your machine

Capacities & Performance

1/1 gastronorm trays per rack	5
Chopping boards per rack	5
Plates per rack	18
Wash Programmes – Utensil	7 minute cycle
Wash Programmes – Dish	2, 3 & 5 minute cycles
Theoretical max. racks per hour – Utensil	8
Theoretical max. racks per hour – Dish	30
Wash tank capacity	15 litres
Rinse tank capacity	6.5 litres
Wash temperature – Utensil	62 °C
Wash temperature – Dish	60 °C
Rinse temperature – Utensil	85 °C
Rinse temperature – Dish	82 °C
Water consumption per cycle – Utensil	3.8 litres
Water consumption per cycle – Dish	2.75 litres

Hydraulics specification

Water supply connection	G3/4" (3/4"BSP)
Required water pressure min/max	1-10 bar
Incoming Water temperature min/max	4°C/55°C
Drain size	40mm diam.
Maximum drain height (from machine base)	600mm
Optional integrated water softener	Yes

Electrical specification

30 Amp – 1 Phase

Amps required	30A (1 Phase)
Standard Operating Voltage	220-240V/1N~/50Hz
Total Connected Load	6.5 kW

13 Amp – 3 Phase

Amps required	13A (3 Phase)
Standard Operating Voltage	380-415V/3N~/50Hz
Total Connected Load	6.5 kW

