



POTATO PEELER PP-6+ 230-400/50/3 · 370 W

Output: 6 kg per cycle.



1000410



DYNAMIC PREPARATION
COMMERCIAL POTATO PEELERS

SALES DESCRIPTION

Aluminium made potato peeler.

Aluminium body potato peeler. Abrasive peeling. The abrasive is highly resistant and long lasting.

- ✓ Base Plate and chamber walls lined with abrasive.
- ✓ Aluminium body.
- ✓ Directable cylinder.
- ✓ Integral control panel complete with on/off push buttons and a 0-6 minute timer.

OPTIONAL

- ☐ Stainless steel floor stand.
- ☐ Water inlet kit (2003971).
- ☐ Filter with no-foam feature.

ACCESSORIES

- ☐ Stands for potato peelers PP / PPC
- ☐ Filters for potato peelers PP / PPC

SPECIFICATIONS

Hourly production: 120 kg / 150 kg
Capacity per load: 6 kg
Timer (min-max): 0' - 6'
Total loading: 370 W
Plate speed: 317 rpm
Electric power supply (V) : 230 V - 400 V / 50 Hz / 3~ (1.9 A-1.1 A)

External dimensions (W x D x H)

- ✓ Width: 395 mm
- ✓ Depth: 700 mm
- ✓ Height: 447 mm

External dimensions with stand

- ✓ Width with stand: 411 mm
- ✓ Depth with stand: 700 mm
- ✓ Height with stand: 1020 mm

Net weight: 31 kg

Crated dimensions

440 x 710 x 470 mm

Gross weight: 33.6 kg



SAMMIC, S.L. · Basarte, 1
20720 AZKOITIA (Gipuzkoa) · SPAIN

product sheet
updated 22/07/2025




POTATO PEELER PP-6+ 230-400/50/3 · 370 W
Output: 6 kg per cycle.



1000410

DYNAMIC PREPARATION
COMMERCIAL POTATO PEELERS

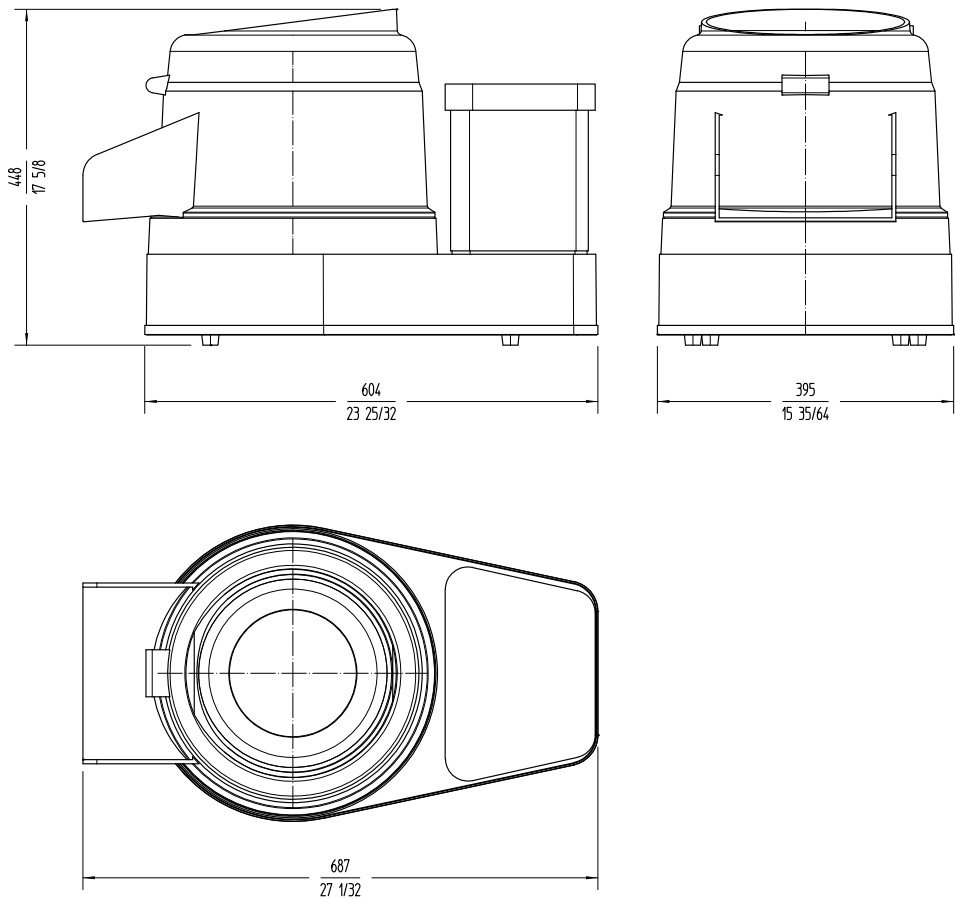

sammic.co.uk
Food Service Equipment Manufacturer
Unit 2, Trevanth Road
Troon Industrial Park
LE4 9LS - Leicester
uksales@sammic.com
Tel.: +44 0116 246 1900



Project	Date
Item	Qty
Approved	

product sheet
updated 22/07/2025