

Storm Dishwashers



FEATURES

- High grade 304 stainless steel construction
- Pressed tank and rounded corners to aid cleaning of machine
- Double skin door for quieter running and improved efficiency
- Rotating wash and rinse arms removable for cleaning
- Fitted with break tank and rinse booster
- Surface filters as standard
- Automatic detergent and rinse aid dosing
- 3 cycles - 90/120/180 secs
- Thermo-stop** ensures a hot rinse temperature on every cycle
- Adjustable wash and rinse thermostats
- ¾" BSP water inlet hose included
- 30A power supply
- Can be converted by changing mains supply cable to a 15A 3phase power supply or downgraded* to 13 amp single phase plug top version
- Supplied with 1x glass baskets, 1x dish basket, 1x cutlery holder
- Gravity and integral drain pump models available
- Cold or Hot water supply max 60°C at 2 – 4bar

OPTIONAL EXTRAS

Manual water softener	F1- DEP12	
Auto water softener	CEPSS-1300	
Water inlet hose (1.5 metre)	P1-3510	
500mm x 500mm glass basket	B8-12025011	
500mm x 500mm plate basket	B8-12024990	
Universal stand	G2-STU	


Note: If optional extras sold separately, there is a delivery charge of £9.95+ VAT

Break Tank

The Blizzard Storm Dishwasher, includes a WRAS approved Integrated breaktank which is compliant with the [Water Supply \(Water Fittings\) Regulations in England, Wales and Northern Ireland](#) and under the [Water Supply \(Water Fittings\) Byelaws in Scotland](#).

Surface Filters

Fitted on all BT Dishwashers, surface filters provide a second level of protection preventing larger debris entering the wash tank.

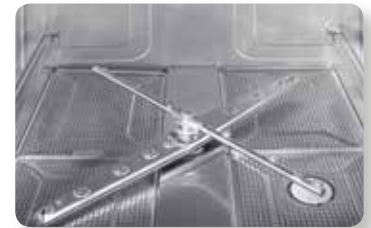

STORM50BT



STORM50BTDP



IMPORTANT NOTES

If you are installing a glass or dishwasher in a hard water area, we recommend you to fit a water softener. Faults attributed to poor water quality are not covered under the manufacturer's warranty.

MODEL	PIECES /CYCLE	PLATE MAX DIA.	WATER USAGE	BASKET SIZE (mm)	EXT. DIMENSIONS (H x W x D mm)	POWER CONSUMPTION	WEIGHT (kg)	RRP
STORM50BT	18 dishes	320mm	2.7L	500 x 500	820 x 600 x 600	6.2KW (* 2.6KW)	71	
STORM50BTDP	18 dishes	320mm	2.7L	500 x 500	820 x 600 x 600	6.2KW (* 2.6KW)	74	
Power conversion charge (STORM50)								

Can be converted by changing mains supply cable to a 15A 3phase power supply or downgraded* to 13 amp single phase plug top version

