



## EC08 - Lincat Electric Counter-top Convection Oven - W 787 mm - 3.0 kW

Cook your way with this versatile 3kW Lincat Electric Convection Oven.

- ✓ Designed to meet the needs of even the most demanding professional kitchen. Versatile and great for roasts, pizzas, pies and bakery products
- ✓ The excellent twin fan air circulation system delivers a highly efficient air circulation ensuring consistent, even and faster cooking times
- ✓ Accommodates 1/1GN containers for convenient operation
- ✓ Fast heat up from cold saves time and money and fast recovery times
- ✓ Water injection facility gives a professional finish to breads and pastries. The useful cook and hold facility reduces oven temperature to 80 degs C at end of cooking period
- ✓ Double-glazed door for energy efficiency
- ✓ Stackable for added flexibility and to make the best of use of floorspace
- ✓ Robust stainless steel construction

### Specifications

#### Summary

<b>Range Name</b>	Lincat
<b>Power Type</b>	Electric
<b>Unit Type</b>	Counter-top
<b>Available in UK Only</b>	No
<b>UK Warranty</b>	2 Years Parts and Labour Warranty
<b>Export Warranty</b>	Contact your local dealer
<b>GTIN Code</b>	5056105101673

#### Power and Performance

<b>Gastronorm Capacity</b>	3 x GN1/1
<b>Total Power kW</b>	3.0
<b>Temperature Range °C</b>	50 - 300
<b>IP Rating</b>	IP23
<b>Temperature Control</b>	Mechanical
<b>Oven Rating kW</b>	3.0

#### Key Specifications

<b>Capacity Litres</b>	130.0
<b>Number of Shelves included</b>	3
<b>Number of Shelf Positions</b>	3

#### Weights and Dimensions

<b>Unit Height (External) mm</b>	575
<b>Unit Width (External) mm</b>	787
<b>Unit Depth (External) mm</b>	644
<b>Height (Internal) mm</b>	430
<b>Width (Internal) mm</b>	600
<b>Depth (Internal) mm</b>	504
<b>Shelf Dimensions Width mm</b>	530
<b>Shelf Dimensions Depth mm</b>	325
<b>Net Weight Kg</b>	66.9

#### Supply Connections

<b>Requires Installation</b>	No
<b>Requires Electrical Supply</b>	Yes
<b>UK 3 Pin Plug</b>	Yes
<b>Requires Hardwiring</b>	No
<b>Electrical Supply Rating Watts</b>	3,000
<b>Single Phase Amps</b>	13.0
<b>Single Phase Voltage</b>	230
<b>Water Connection BSPT</b>	3/4"
<b>Water Connection Pressure Bar</b>	0.2 - 10.0




#### Shipping

<b>Packed Weight Kg</b>	83.7
<b>Packed Height cm</b>	86
<b>Packed Width cm</b>	91
<b>Packed Depth cm</b>	80

### Available Accessories

<b>EC08/FS</b>	EC08 FLOOR STAND
<b>EC08/LFS</b>	EC08 LOW FLOOR STAND
<b>EC08/SK</b>	EC08 STACKING KIT

Technical Picture

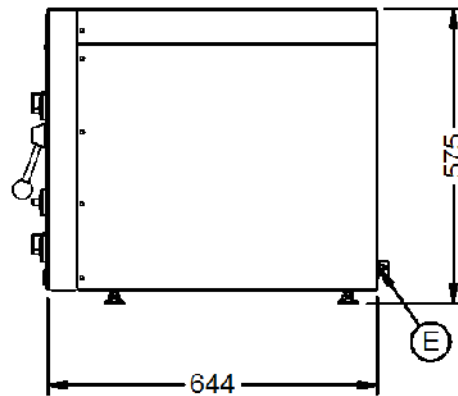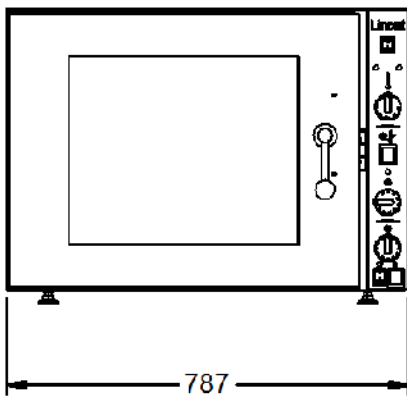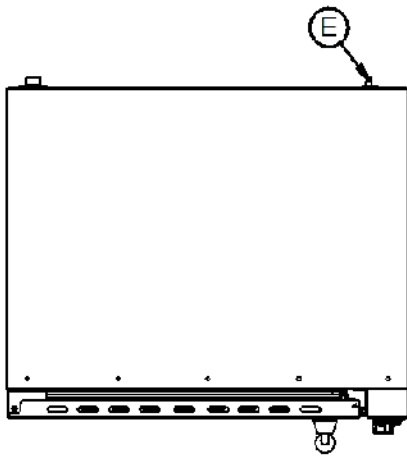

**Lincat Limited**

Whisby Road,  
Lincoln, LN6 3QZ,  
United Kingdom

**Company No:** 2175448

A member company of



**Customer Care**

**Tel:** +44 1522 875500  
**Email:** care@lincat.co.uk

**Export Customers**

**Tel:** +44 1522 503250  
**Email:** export@lincat.co.uk

**Opening Hours**

**Monday – Friday:**  
8.30am – 5pm