SMARTVIDE 5 230/50-60/1 UK

Maximum capacity: 30 lt./ 8 gal.





- tasks while the product is being cooked. Just program temperature and time, SmartVide will do the rest. 4 buttons and a full-color TFT display that offers all the information at a glance makes operation a child's play.
- √ SmartVide5 is portable: thanks to their ergonomic handle, SmartVide5 can be taken from a container to another easily. Additionally, the optional bag allows easy transport wherever the Chef goes.
- ✓ HACCP-ready: thanks to Bluetooth connectivity, it is possible to export or print cooking results at the end of each cycle.
- Your appliance, always updated: free firmware update, no matter where the appliance is.

ACCESSORIES

- Needle Probe for sous-vide cookers
- □ Probe Foam Seal
- ☐ Insulated tank for SmartVide immersion circulator
- ☐ Lid for SmartVide insulated
- tanks
- □ Floating balls for SmartVide
- □ SmartVide transport bag
- Smooth bags for sous-vide cooking

SALES DESCRIPTION

Commercial high-precision sous-vide cooker. Reliable, user-friendly, portable.

Interchangeable between °C and °F.

- ✓ Bluetooth connectivity.
- √ HACCP-ready.
- √ Optional core probe.
- √ Firmware update.

Portable precision cooker with stirrer for up to 30 lt. / 8 gal. containers. Deisgned for chefs, developed with chefs.

- The thick stainless steel, robust construction guarantees commercial performance. The front panel and the grip are made of fiberglass-reinforced polyamide.
- SmartVide guarantees cooking at a precisely controlled temperature while preserving the quality of the product, enhancing flavor and texture. Equipped with a highly precise temperature control system to obtain extremely consistent results.
- Allows cooking food in their own juice and using this juice immediately after cooking to enhance flavors.
- √ Marinates and macerates an ingredient in half the time.
- Infuses and flavors oil, fat or other products applying the controlled temperature technique.
- ✓ Increases **profits** due to lack of product shrink.
- ✓ Requires very little hands-on time, allowing the Chef to do other







Polígono Basarte, 1. 20720 Azkoitia, Spain phone +34 943 15 72 36 sales@sammic.com



Project	Date
Item	Qty

Approved

sammic

SMARTVIDE 5 230/50-60/1 UK

Maximum capacity: 30 lt./ 8 gal.



FOOD PRESERVATION AND SOUS-VIDI

P/N 1180101

SPECIFICATIONS

Temperature

Display precision: 0.01 °C Range: 5 °C - 95 °C

Permissible ambient temperature: $5\,^{\circ}\text{C}$ - 40

°C

Time

Resolution: 1 '

Cycle duration: 1 ' - 99 h

General features

Maximum recipient capacity: 30 l

Total loading: 1600 W

Electrical supply:230 V / 50-60 Hz / 1 ~ Plug: UK (BS 1363 13A / 2P+G)

Submergible part dimensions: 116 mm x 94

mm x 147 mm


External dimensions (WxDxH): 116 mm x

128 mm x 330 mm

Net weight: 3.1 Kg

Crated dimensions

410 x 185 x 285 mm Gross weight: 5 Kg.

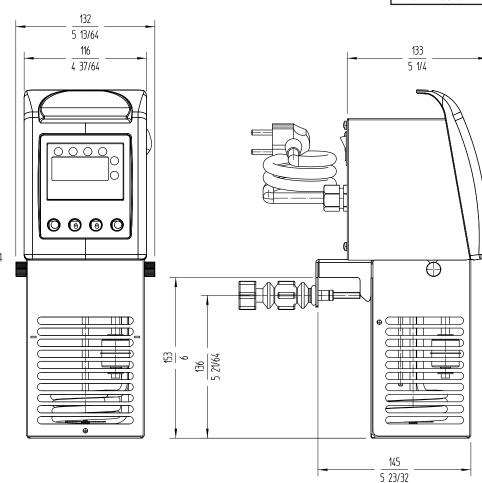



Polígono Basarte, 1. 20720 Azkoitia, Spain phone +34 943 15 72 36 sales@sammic.com



Project	Date
Item	Qty