

MXG 427 EcoX XSafe

Scotsman®
Ice Systems

Modular Ice Machine 170 kg

Item #:

Project:

Quantity:



FEATURES

- Individual transparent solid cube: each single cube is an artwork: crystal clear and perfectly shaped, faithful to the Scotsman tradition.
- Global standard footprint: strictly follows international imperial standard commonly adopted in the industry of reference.
- Electronic control: ambient and water temperatures may change throughout the years but your ice will stay the same.
- External indicator lights: keeps ice maker's operations under constant surveillance.
- Front access condenser air filter: a do-it-yourself cleaning operation that saves time and money and makes your ice maker live longer.
- Clean alert: advises with a blink when it's time to clean the filter.
- XSafe: natural sanitation system, integrated inside the ice maker and operating automatically 24/7 to keep equipment clean & safe.



MXG M 427
Medium Gourmet 20 g
Ø 30 x H 34 mm

CONDENSING SYSTEM

Air cooled

REFRIGERANT GAS

R290

VOLTAGE V/Hz/ph

230/50/1

RECOMMENDED BINS

Head	Bins		kg
MXG 427	✓	SB193	129
	✓	SB322	168
	BINTOPMXGSB55	SB550	252
	●	UBH1100	553
	●	UBH1600	812
	●	SIS700	318 + 73
	●	SIS1350	613 + 73 + 73

LEGEND:

- ✓ : Perfect combination between ice maker and bin
- : Ice chute cut-out performed upon installation
- CBTxxxxxxxx : need additional bin top

CERTIFICATIONS



OPERATING REQUIREMENTS

	Minimum	Maximum
Air temperature	10	43
Water temperature	5	38
Water pressure	1 bar (14 psi)	5 bar (70 psi)
Electrical voltage	-10%	+10%

IMPORTANT NOTICE:
Models and specifications are subject to change without notice.
This spec sheet is meant for commercial purpose only.
For technical documentation please refer to our service manuals.

www.scotsman-ice.it
www.scotsman-ice.com

Modular Ice Machine 170 kg

March 2022

MXG 427 EcoX XSafe


Scotsman
Ice Systems

Modular Ice Machine 170 kg

Item #:

Project:

Quantity:

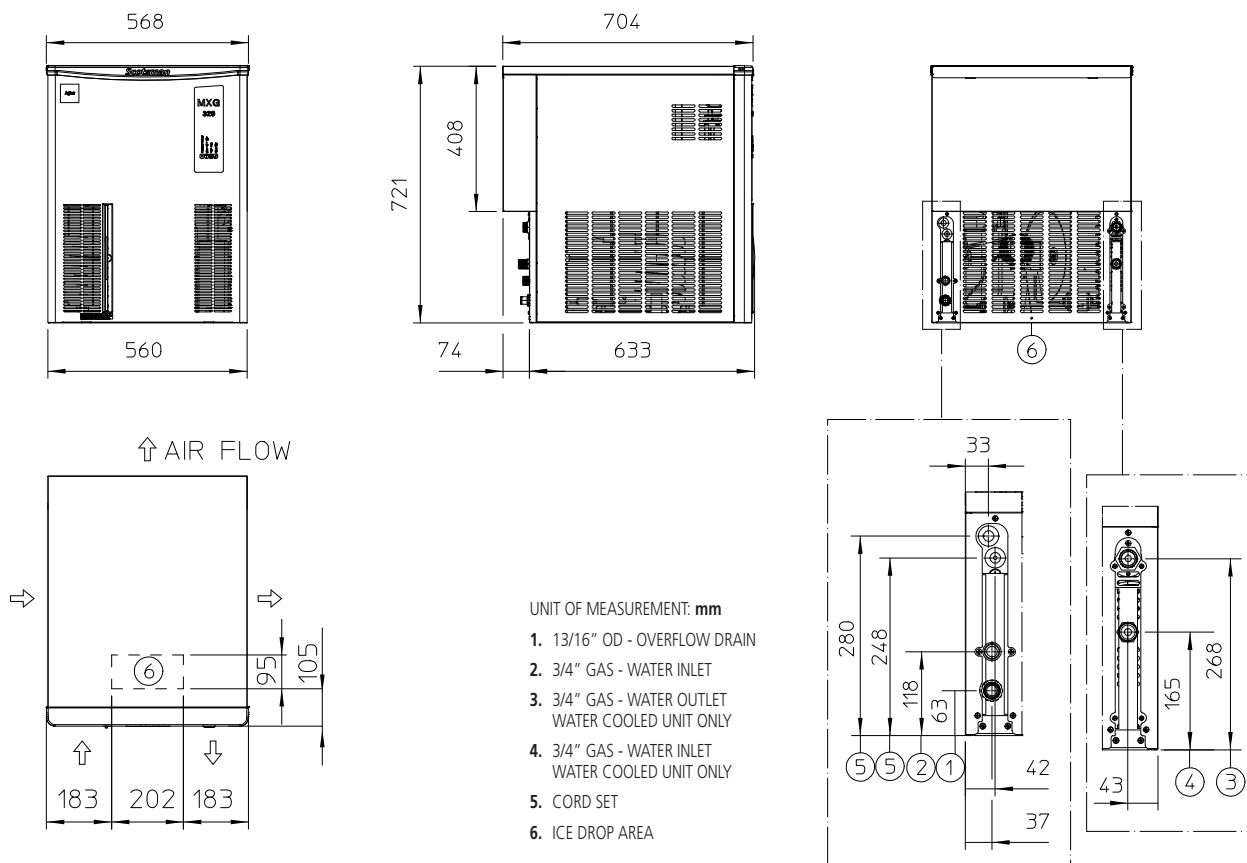

UNIT DATA					SHIPPING DATA						
Size (W x D x H)		568 x 704 x 721 mm			Carton (W x D x H)		630 x 770 x 910 mm				
Net weight		66 kg			Weight		77 kg				
		24 h ice production kg °C Amb. / °C Water			Energy consumption (*)		Water usage (*)	Instant power	Compressor	Circuit wires	Max. fuse size
Version	Voltage	10°C/10°C kg	21°C/10°C kg	32°C/21°C kg	kWh/ 100 kg	kWh/ 24h	l/h	W	W	No. x Ømm²	A
MXGM 427 AS	230/50/1	170	165	135	19.7	26.7	18.0	1350	3620	3 x 1.5	16

(*) Data refer to 32°C Amb. / 21°C Water temperature conditions

SB 322

Storage bin 168 kg

Scotsman®
Ice Systems

Item #:

Project:

Quantity:



FEATURES:

- Slope front ice storage bin, for Gourmet & Dice Cubes, Flake, Superflake, Nugget, Cubelet ice.
- New sleek, contemporary styling.
- Convenient and hygienic internal ice scoop holder.
- Exterior panels in durable stainless steel.
- Polyurethane Insulation.
- High density, non-corroding Polyethylene bin liner, designed with easy-to-clean rounded corners, resistant to scratches and scuffs from ice scoops.
- Robust door frame will resist operational abuse.
- Rounded door-lip profile allows an easy reach for enhanced ease of operation.

UNIT DATA

Size (W x D x H) 568 x 872 x 1271 mm

Net weight 48 kg

SHIPPING DATA

Carton (W x D x H) 620 x 940 x 1310 mm

Weight 62 kg

Bin	Compatibility	Ice Machine
SB 322	✓	MXG 327-328-427-428
	✓	C 322-522-722
	✓	MV 306-426-430
	✓	NW 307-308-507-508
	✓	N 622-922
	CBT22EFCD	MFN 46-47-56
	✓	MF 26-36
	CBT22EFCD	MF 46-47-56-57

LEGEND:

- ✓ : Perfect combination between ice maker and bin
- : Ice chute cut-out performed upon installation
- CBTxxxxxxxx : need additional bin top

CERTIFICATIONS:



IMPORTANT NOTICE:

Models and specifications are subject to change without notice. This spec sheet is meant for commercial purpose only. For technical documentation please refer to our service manuals.

www.scotsman-ice.it
www.scotsman-ice.com

Storage bin 168 kg




SB 322

Storage bin 168 kg

Item #:


Project:

Quantity:

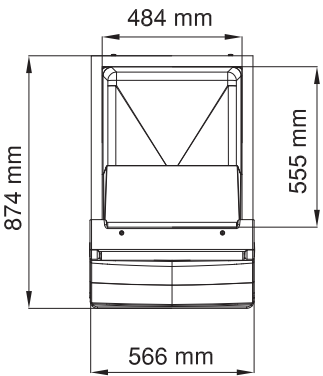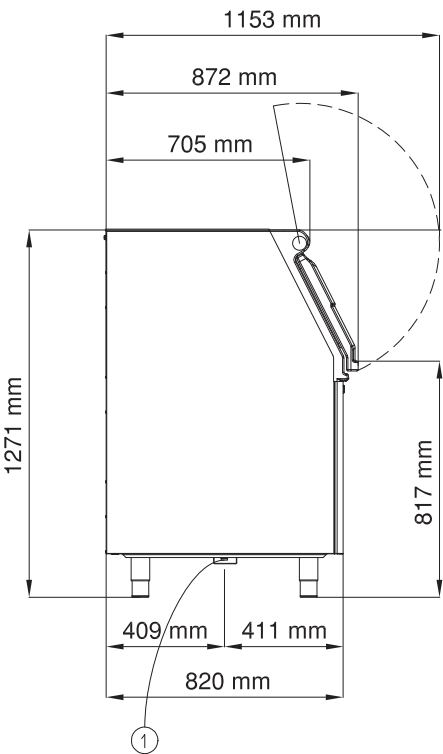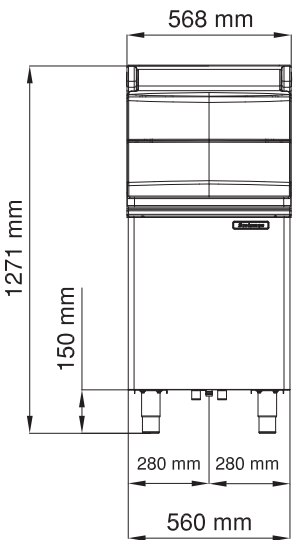


1) Drain Ø 20 mm

Ice capacity (application)*	Ice capacity (AHRI)**	Internal volume
kg	kg	m ³
168	132	0.34



(*) Application capacity
is calculated on 90% of
total volume x 545 kg/m³



(**) AHRI capacity is
calculated on 80% of
total volume x 481 kg/m³

Storage bin 168 kg