



Overview

Under counter mobile hot cupboards with sliding doors. Designed to complement the Innovative Moffat drop-in counter modules. Based on Gastronorm GN1/1 pans available in four lengths. Compact high capacity units neatly slide under the drop-in type bain-marie and hot tops, providing extra hot storage. Plates and dishes can be held warm ready for service, or hot food for replenishing the servery counter units above. Fully insulated robust stainless steel construction with a solid plain top made to the same build standard as the Moffat Premier hot-cupboard range.

Key Features:


- Thermostatically controlled hot cupboard with fan assisted removable heating unit, 30°-110°C
- Moffat's renowned innovative Sahara Fan heating cell.
- Fan unit is easily removable for cleaning and maintenance.
- This forced-air, convection, heated cupboard offers unparalleled flexibility of use.
- A standard unit allows seamless integration into food service counters.
- Doors are very easily removed for cleaning,
- Sliding doors have unique double life skid pads,
- Doors can be fully rotated and reinserted allowing the spare skid pads to be used offering a long and trouble free service.
- Easy lift out GN1/1 size multiple grid shelves are held by heavy duty stainless steel tube supports
- The recessed control panel is mounted to operator right hand side of cupboard.
- The control panel section, is a slide out design for improved service access.
- Mounted on double wheel braked castors for accurate final site positioning and easy pull out for cleaning
- Complete with 2m long cable and 13amp moulded plug.




innovation

Double life door skids.
Sahara fan heating cell.


| Model Code | Weight (kg) | Length (mm) | Depth (mm) | Height (mm) | Electrical Supply | Power Rating (kw) |
|------------|-------------|-------------|------------|-------------|-------------------|-------------------|
| HC2R | 34 | 870 | 660 | 550 | 13amp 230V | 0.9 |
| HC3R | 49 | 1198 | 660 | 550 | 13amp 230V | 1.5 |
| HC4R | 65 | 1526 | 660 | 550 | 13amp 230V | 1.5 |
| HC5R | 81 | 1854 | 660 | 550 | 13amp 230V | 1.9 |

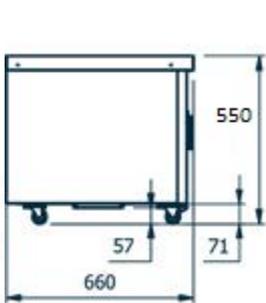



HC2R

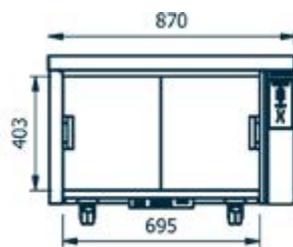


HC3R

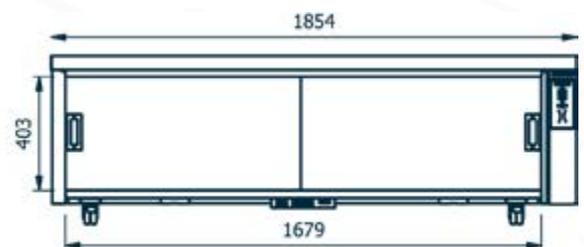

HC5R

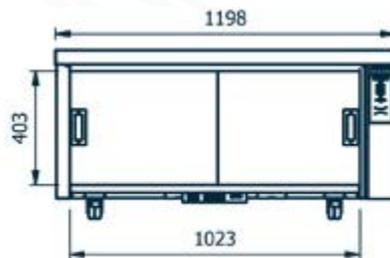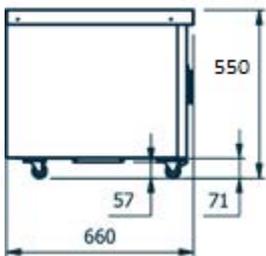

HC3R

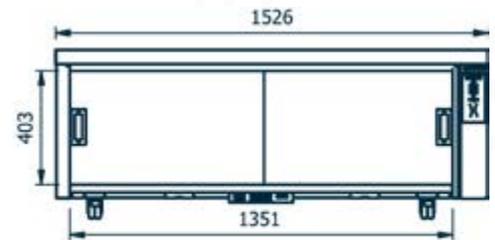

HC4R

Important Design Parameters:
 Allow a minimum air space of 15mm all round for easy slide in under counter.

