

### GLASSWASHER X-40B 230/50/1 DD (WITH DRAIN PUMP) 400x400mm racks. Max. loading height: 240mm

P/N 1301986





## SALES DESCRIPTION

3 wash cycles. Cold rinse facility. Option of built-in water softener.

- ✓ Best performance.
- Optimal washing results.
- ✓ Sturdy and reliable.

✓ Stainless steel, sturdy and resistant washing arms.Don't get damaged because of chemical corrosion.

 $\checkmark$  2.5 kW boiler and 1.5 kW wash tank: optimal recovery times.

✓ Full optional list.





www.sammic.co.uk Food Service Equipment Manufacturer Unit 2, Trevanth Road Troon Industrial Park LE4 9LS - Leicester

uksales@sammic.com Tel.: +44 0116 246 1900



Project	Date
Item	Qty
Approved	

## FEATURES AND BENEFITS

- $\checkmark$  For washing glasses, cups, cutlery and small plates.
- $\checkmark$  3 wash cycles with final cold rinse.

 $\checkmark$  Manufactured from catering grade AISI 304 2B stainless steel and incorporating top quality components.

 $\checkmark$  Double skinned door with high efficiency seal, ensuring thermal and acoustic insulation. Magnetic door micro-switch.

✓ Removable stainless steel rack holders ensure even distribution of wash water without dead zones. Precision positioned water jets guarantee optimum washing result for even the most stubbornly stained glasses. Easy to assemble, boltless rinse spray arms.

 $\checkmark$  Rinsing dispensers without screws, easy assembly and simple and clean look.

✓ A double filter system provides effective wash pump protection that is easily removed (for maintenance and cleaning) and replaced, without tools.

 $\checkmark$  Completely rounded, stainless steel wire rack support and guide.

- ✓ Automatic detergent and rinse aid dosing equipment.
- ✓ Electronic control panel with anti-moisture seal.

 $\checkmark$  Adjustable washing tank and boiler temperature and security in the boiler.

 $\checkmark$  Rinse boiler temperature adjustment and a thermal cycle delay option, guaranteeing a minimum final rinse temperature of 85°C for each and every rinse cycle.

 $\checkmark$  Sammic ware washers are designed for easy and fast on-site maintenance.

#### **NCLUDES**

✓ Rinse aid doser.

- Drain pump and non-return valve.
- equipment.
- 1 open basket.
- 1 mixed basket.
- $\checkmark$  Variable detergent dosing  $\checkmark$  1 small cutlery basket.

product sheet updated 07/05/2018



# GLASSWASHER X-40B 230/50/1 DD (WITH DRAIN PUMP)

400x400mm racks. Max. loading height: 240mm

240

315 12 29/64

P/N 1301986

290 11 27/64

## **SPECIFICATIONS**

Basket dimensions: 400 mm x 400 mm Maximum glass height: 240 mm Cycle duration: 90 " / 120 " / 150 " Production baskets/hour: 40/30/24 Boiler capacity: 4.5 l Wash tank capacity: 16 l Water consumption/cycle: 2.2 | Electrical supply: 230 V / 50 Hz / 1 ~ (12.5 A) Plug: -Loading ✓ \_\_Pump: 220 W / 0.3 Hp

- √ Tank: 1500 W
- ✓ Boiler: 2500 W
- ✓ Total loading: 2720 W


#### External dimensions (WxDxH)

- ✓ Width:470 mm
- ✓ Depth: 535 mm
- ✓ Height: 670 mm
- Net weight: 39.5 Kg

#### **Crated dimensions**

525 x 615 x 820 mm

Gross weight: 45.5 Kg.

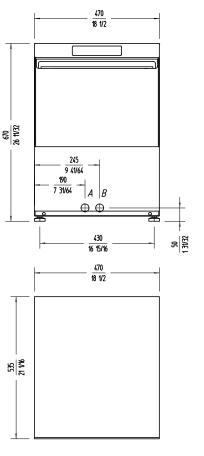

#### **ACCESSORIES**

- □ Stands for glass- and dishwashers
- Dosing equipments Manual water softeners

Automatic water softeners

- 400X400 mm. baskets
- Inserts, supplements & similar

530 20 3/4

<u>387</u> 15 15/64

535

20 61/64

<u>102</u> 4

High Feet Kit



www.sammic.co.uk Food Service Equipment Manufacturer Unit 2, Trevanth Road

Troon Industrial Park LE4 9LS - Leicester uksales@sammic.com

Tel.: +44 0116 246 1900



Project	Date
Item	Qty
Approved	