


Autofill Wall Mounted 3L with Built in Filtration



Water Boiler Features

- Compact and stylish, sits above a counter or sink.
- Simple to install and easy to use.
- Will dispense upto 206 cups per hour / 31 litres, with 3.4 litre rapid draw-off.
- Easy to access tank for cleaning and descaling.
- LED light for descale warning
- Affordable and cost effective.
- Easy clean stainless steel casing

Dimensions (mm)

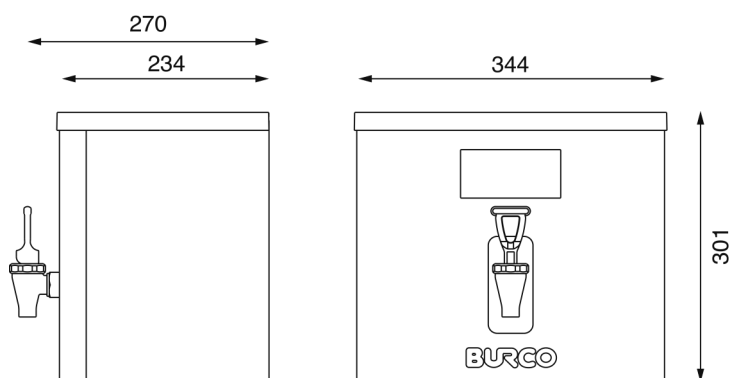

| | |
|-----------------|------------------------|
| Product Code | 069924 |
| Model no. | |
| EAN Barcode | 5011139069924 |
| Product type | 2 Autofill Boiler |
| Warranty Period | years parts and labour |

Technical Information

Product Info:

| | |
|----------------------------------|---|
| Filtered | no |
| Capacity (litres) | 3 |
| Packed Dimensions (WxDxH, mm) | 432x490x401 |
| Drip Tray Dimensions (WxDxH, mm) | N/A |
| Product Weight (kg) | 4.8 |
| Packed Weight (kg) | 7 |
| Colour | Bright Annealed Stainless Steel & Black |
| Body Construction / Material | 430 Stainless Steel |
| Tank Construction / Material | 304 grade Stainless Steel |
| Trim and drip tray plastic type | PC ABS |
| Tap Material type | Chrome |
| Dual Function Tap | Yes |
| Safety Standards test | EN60335 |
| Nonslip Feet | NA |
| Boil Dry cut-out | Yes |

Performance:

| | |
|------------------------------------|------|
| Heat up Time to 98°C (minutes) | 18 |
| Rapid Draw off—Litres | 3.4 |
| Rapid Draw off—Pints | 6 |
| Rapid Draw off—Cups | 22 |
| Output per Hr—Litres | 31 |
| Output per Hr—Pints | 55 |
| Output per Hr—Cups | 206 |
| Recovery Per min—Litres | 0.5 |
| Recovery Per min—Pints | 0.88 |
| Recovery Per min—Cups | 3.3 |
| Heat up time 70°C—98°C (minutes) | 5 |
| Cool down time 98°C—70°C (minutes) | 270 |
| Standard power consumption (kW/hr) | 0.12 |

Installation:

| | |
|---------------------------------|--------------|
| Hard wiring required | Yes |
| UK fitted plug | No |
| Cable length (m) | NA |
| Water feed pipe length (m) | 2 |
| Max. water inlet pressure (bar) | 8 |
| Element power rating | 2.8 |
| Phase type | Single |
| Nominal voltage | 230V 50-60Hz |
| Electrical supply current (A) | 13 |
| Water inlet connection fitting | 3/4" BSP |