



DOMINATORPLUS

G3107 Solid Top Gas Range

Key features

- Solid top model with removable bullseye
 - Can deliver heat up to 400°C when required
- 18mm thick cast iron solid top
 - Robust and hard-wearing, enough to perform in tough environments
- Graduated heat across the cooking surface
 - Move pans to suit what you're cooking
- Vitreous enamelled oven chamber
 - Easy to clean and to keep clean
- Wide oven temperature range of 120 - 270°C
 - Ideal to prepare a wide variety of food
- Piezo ignition to oven
 - Simple, trouble-free operation
- Twin oven doors with individual catches
 - Retains heat within the oven chamber
- Oven has 5 shelf positions and allows 2 shelf cooking
 - Versatile, ideal for a wide range of menu items
- Low profile door handles
 - Reduces intrusion into work space
- Laser-etched control icons
 - Permanent, indelible markings

Accessories


- Fully integrated extended flue
- Splashplate and plateshelf (not for use with extended flue)
- Oven shelf
- Factory fitted, adjustable castors
- Fixed installation kit



Similar Models

- G9181 solid top range
- G3127 solid top boiling top
- G3101HD Six burner heavy duty range
- G3101D Six burner range with drop down door
- G3101 OTC Six burner range - electric fan assisted oven
- G3106 Six burner range - gas fan assisted oven
- G3161 Four burner range - general purpose oven

Solid Top Gas Range

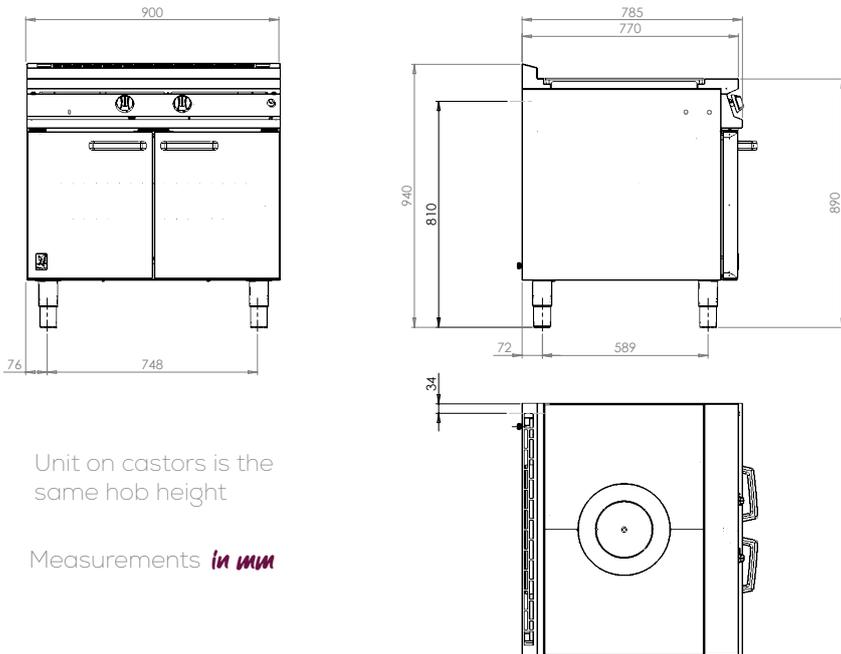

Unit on castors is the same hob height

Measurements *in mm*

Installation notes

Adequate ventilation must be provided to supply sufficient fresh air for combustion and to allow easy removal of any such products that may present a risk to health. Please consult current legislation for details that relate to specific locations.

Install unit on a level, fireproof surface in a well-lit, draught free position. If floor is made of a combustible material, local fire requirements must be checked to ensure compliance.

A clearance of 150mm should be observed between appliance and any combustible wall.

Specification details

Total rating (natural and propane - kW - Nett)	17.3		
Total rating (natural and propane - btu/hr - gross)	64,900		
Inlet size (natural and propane)	3/4" BSP		
Flow rate - natural (m ³ /hr)	1.83		
Flow rate - propane (kg/hr)	1.34		
Inlet pressure (natural and propane - mbar)	20 / 37		
Operating pressure (natural and propane - mbar)	15 / 37		
Hob burner rating * (natural and propane - kW)	10.2		
Hob burner rating * (natural and propane - btu/hr)	38,300		
Oven burner rating * (natural and propane - kW)	7.1		
Oven burner rating * (natural and propane - btu/hr)	26,600		
Oven dimensions (w x d x h - mm)	700 x 535 x 430		
Oven shelf (w x d - mm)	700 x 535		
Gastronorm compatibility	2/1		
Weight (kg)	137		
Packed weight (kg)	150		
Packed dimensions (w x d x h - mm)	1000 x 1000 x 1100		
GTIN numbers			
Nat Gas (feet)	Nat Gas (castors)	LPG (feet)	LPG (castors)
5056466901141	5056466901134	5056466901165	5056466901158

