

**5 YEAR
WARRANTY**
PARTS &
LABOUR

Perfection
with peace
in mind



1PREMIER
SERIES



GRAM

Let's grow together!

Established as the premium market leader in ice makers, we now strive to become the premium market leader for commercial ice and refrigeration products.

We aim to be the international top tier brand spanning the cooling category. To achieve this goal, we are refocusing and aligning our strategies to create one unique portfolio in the EMEA market. Incorporating a wealth of Gram knowledge and expertise into the Hoshizaki premium cooling portfolio will enable us to offer the best-in-class solution.

ONE BRAND

Creating one brand for all markets, our portfolio sets Hoshizaki up as a top-tier, prestigious, innovative and proven global player within commercial refrigeration and ice makers. This guarantees all clients will be serviced with the best engineered, durable, reliable and efficient system available on the market today. A superior system that cools and freezes smarter, safer and in an even more sustainable way. Offering professionals premium performance and peace of mind for now and in the future.

TOGETHER WE WILL RISE TO THE CHALLENGE

In our brand new state-of-the-art production facilities across multiple countries, we are developing an all-in-one premium systems, integrating features and a uniform product series.

LET'S GROW TOGETHER!


We are building upon a solid foundation of over a century of experience. A premium brand on the international market with a great reputation in which we will keep investing.

AT A GLANCE

The Premier benefits

Solid foundation

With a reputation for delivering smart refrigeration solutions, Hoshizaki engineers cabinets for better storage solutions for Chefs and kitchen operators.



COMPARTMENTALIZED DESIGN

The PREMIER's condenser is positioned on top of the cabinet, which brings multiple advantages. Extra space allows for easy cleaning. As the evaporator is positioned on top of the cabinet, valuable space inside the cabinet can be used for storage. Additionally, it can easily be serviced via the front access panel on top of the cabinet.



HEALTHY WORK ENVIRONMENT

Extras, like the practical pedal door opener, allow hands-free opening and saves time within busy kitchen operations. The range contributes to a healthier work environment with ergonomic design features, such as full-height handles and low noise levels.



PERFECT TEMPERATURES

The efficient air circulation system helps to maintain perfect storage temperatures at all times in the whole cabinet, preserving the taste, texture, nutritional content and preventing food waste. The PREMIER is designed to recover the inside temperature rapidly after each door opening and automatic defrosting.



VAST VARIETY

The PREMIER series comes in different cabinet sizes and temperature ranges to meet your individual needs. Depending on your requirements, you can choose cabinets with top or bottom-mounted cooling system and cabinets with varying width and depth.



EASY CLEANING & WASTE REDUCTION

Thanks to the rounded corners and seamless surfaces, cleaning routines become a quick and simple task. The practical anti-tilting rails prevent spillage and the cabinet has a rounded interior and comes with removable door gasket.

A quick guide to the Premier series.




- > Ideal for commercial kitchens
(Front of House/ Back of House)
- > Suitable for operations in ambient
temperatures of up to +40°C
- > Heavy-duty cabinets:
climate class 4/5
- > High performance: stable temperatures
in the whole cabinet despite frequent
door openings
- > Meets Gastronorm
& shelf size standards


- 1 > Low noise levels.
- 2 > 80mm insulation generate low energy consumption and high temperature stability (even during defrost cycles).
- 3 > Seamless structure for easy cleaning inside the cabinet.
- 4 > 304 quality stainless steel for durability and food safety
- 5 > Most efficient air distribution inside with a specially designed air channel and therefore temperature stability on all levels.
- 6 > Compartmentalized design for maximum internal capacity and easy maintenance.
- 7 > Low maintenance condenser without filter.
- 8 > Wide magnetic removable door seal with triple insulation area provides an effective seal, reduces escaping cold air.
- 9 > Unique pedal door opener, which can be placed on left or right side.



- < 10 Clear display. Designed with easy cleaning in mind.
- < 11 Automatic re-evaporation of condensation water.
- < 12 Door lock.
- < 13 Automatic fan cutout switch.
- < 14 Wide variety of cabinet size and temperature ranges.
- < 15 Built-in LED light.
- < 16 Forced air-cooling system.
- < 17 Self-closing door at an angle of less than 90 degrees for food safety, energy-saving and easier working routines.
- < 18 Protecting Class (IP2X).
- < 19 Reversible door allows the appliances to be adapted to any individual installation site.
- < 20 Full-height ergonomic handle for easy cleaning.
- < 21 According to your preference: Legs or Castors, Reversible door.



Refrigerator
+2/+12°C



Fresh meat and fish
-5/+12°C



Freezer
-25/-5°C



Glass door refrigerator
+2/+12°C

Solid quality for kitchen perfectionists.

ABOUT PREMIER

The Hoshizaki PREMIER is a series of heavy-duty cabinets for energy-efficient refrigeration (Climate Class 4/5), catering to the needs of busy commercial kitchens. The durable design with solid door hinges, stainless steel and a flawless finish is built to withstand the most demanding kitchen operations. The PREMIER cabinets are available with legs instead of castors.



ERGONOMIC & EASY TO USE

Extras, like the practical pedal door opener, allow hands-free opening, contribute to a healthier work environment and save time for busy kitchen operations. The functional and intuitive display is easy to navigate.



TECHNOLOGY FOR KITCHEN EXCELLENCE

With a reputation for delivering solid refrigeration solutions, Hoshizaki develops cabinets for better storage solutions for Chefs and



DIGITAL TOUCH

PREMIER cabinets come with an intuitive control display, concealed behind a transparent and impact and water resistant top panel.

MAXIMUM STORAGE SPACE

With shelf runners from the top to bottom of the cabinet, the inside space can be efficiently utilized for maximum produce storage.

EASY CUSTOMIZATION & FLEXIBILITY

PREMIER cabinets can easily be adjusted to your requirements, for example, the length of the legs, the position of the door, and the foot pedal. PREMIER cabinets can accommodate shelves up to 22 levels (4 shelves included) offering you high flexibility to accommodate different types of produce.




**ERGONOMIC FULL-LENGTH
DOOR HANDLE**

Easy to clean.

**HYGIENE & WASTE
REDUCTION**

Thanks to the rounded corners, smooth surfaces and molded rails, cleaning schedules become a quick and simple task. The practical anti-tilting function prevents spillage. The interior and exterior are made of AISI 304 stainless steel and are perfectly suitable for humid locations.

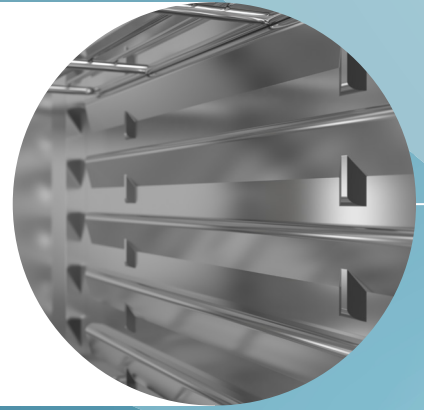

Perfect temperatures for maximum food safety.


The PREMIER series offers a wide range of models for diverse catering establishments without compromising on energy efficiency and low total cost of ownership.

The PREMIER is designed to recover the inside temperature rapidly after each door opening and defrosting. Keeping your produce at optimal storage conditions, with minimal temperature differences within the cabinet which helps enhance the shelf life of your products.



UNIFORM KITCHEN DESIGN

The exterior of all PREMIER cabinets features a uniform design that seamlessly and aesthetically fits into your Hoshizaki Gram refrigeration concept.

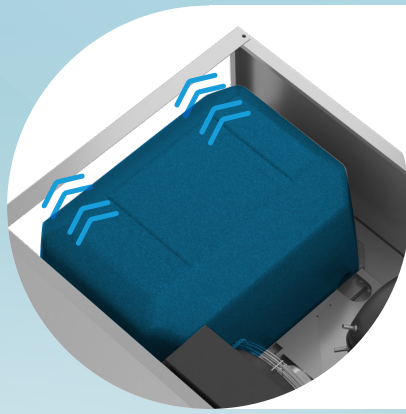

COMPARTMENTALIZED DESIGN

The PREMIER refrigeration system uses a compartmentalized design. The cabinet's condenser is positioned on top of the cabinet (except for all BW models), which brings multiple advantages. As the evaporator is positioned on top of the cabinet, valuable space inside the cabinet can be used for storage. Additionally, it can easily be serviced via the front access panel on top of the cabinet.



FOOD SAFETY & TEMPERATURE STABILITY

The efficient air circulation system helps to maintain perfect storage temperatures at all times, preserving the taste, texture and nutritional content of your fresh goods. The PREMIER is designed to recover the inside temperature rapidly after each door opening and defrosting.



SPECIFICATIONS

5 YEAR
WARRANTY
PARTS &
LABOUR

THE PREMIER FAMILY



SPECIFICATIONS

70



2/1 GN



	PREMIER K 70 C DR U	PREMIER M 70 C DR U	PREMIER F 70 C DR U	PREMIER KG 70 C DR U
Item number	171702030	172702030	173702030	174702030
Temperature range	+2°C/+12°C	-5°C/+12°C	-25°C/-5°C	+2°C/+12°C
Volume, gross (ltr.)	700	700	700	700
Net usable volume (ltr.)	475	475	475	475
Outside dimensions, W x D x H (mm)	690 x 920 x 2075 (inc. castors)	690 x 920 x 2075 (inc. castors)	690 x 920 x 2075 (inc. castors)	690 x 920 x 2075 (inc. castors)
Weight (kg)	125	125	125	130
Weight, packed (kg)	135	135	135	140
Refrigeration capacity at -10°C (Watt)	206	206	-	206
Refrigeration capacity at -25°C (Watt)	-	-	376	-
Connection	230V / NPE 50 Hz	230V / NPE 50 Hz	230V / NPE 50 Hz	230V / NPE 50 Hz
Connection load (Watt)	120	120	460	120
Energy efficiency class	A	A	C	B
Energy consumption (kW/24h)	0.935	0.935	4.853	1.237
Sound level db(A)	48	48	52	48
Climate class	5	5	5	4
GWP	3	3	3	3
Refrigerant	R600a	R600a	R290	R600a
Number of nylon coated shelves	4	4	4	4
Maximum number of shelves	22	22	22	22

760660009	Shelf (grey) with back guard for GN 2/1 cabinets excl. rail
760660013	Shelf (stainless steel) with back guard for GN 2/1 cabinets excl. rail
760660442	Shelf (grey) for GN 2/1 cabinets excl. rail (bottom)
760660437	Shelf (stainless steel) with back guard for GN 2/1 cabinets excl. rail (bottom)
760660444	Set of (stainless steel) shelves (3 top + 1 bottom) with back guard for GN 2/1 cabinets excl. rail (single door)
760660118	Set of 4 stainless legs 130-180mm
760660022	Set of 4 castors 125mm
760660430	Master key

HIGHLIGHTS

- Removable gaskets
- Monoblock
- Round edges inside
- Airflow guide
- Low sound level
- Right hand hinged reversible door
- Automatic door closing
- Pedal door opener with safety release
- 4 grey shelves (530 x 650mm)
- LED lighting
- Door lock
- Castors, H = 125mm

SPECIFICATIONS

140



2/1 GN



	PREMIER K 140 C U	PREMIER M 140 C U	PREMIER F 140 C U	PREMIER KG 140 C U
Item number	171142090	172142090	173142090	174142090
Temperature range	+2°C/+12°C	-5°C/+12°C	-25°C/-5°C	+2°C/+12°C
Volume, gross (ltr.)	1400	1400	1400	1400
Net usable volume (ltr.)	1085	1085	1085	1085
Outside dimensions, W x D x H (mm)	1380 x 920 x 2075 (inc. castors)	1380 x 920 x 2075 (inc. castors)	1380 x 920 x 2075 (inc. castors)	1380 x 920 x 2075 (inc. castors)
Weight (kg)	196	196	196	215
Weight, packed (kg)	212	212	212	230
Refrigeration capacity at -10°C (Watt)	361	361	-	361
Refrigeration capacity at -25°C (Watt)	-	-	608	-
Connection	230V / NPE 50 Hz	230V / NPE 50 Hz	230V / NPE 50 Hz	230V / NPE 50 Hz
Connection load (Watt)	200	200	920	200
Energy efficiency class	A	A	C	B
Energy consumption (kW/24h)	1.622	1.622	8.89	2.26
Sound level db(A)	50	50	56	50
Climate class	5	5	5	4
GWP	3	3	3	3
Refrigerant	R290	R290	R290	R290
Number of shelves	8	8	8	8
Maximum number of shelves	22 x 2	22 x 2	22 x 2	22 x 2

ITEM NUMBER	ADD ON
760660009	Shelf (grey) with back guard for GN 2/1 cabinets excl. rail
760660013	Shelf (stainless steel) with back guard for GN 2/1 cabinets excl. rail
760660442	Shelf (grey) for GN 2/1 cabinets excl. rail (bottom)
760660437	Shelf (stainless steel) with back guard for GN 2/1 cabinets excl. rail (bottom)
760660445	Set of (stainless steel) shelves (6 top + 2 bottom) with back guard for GN 2/1 cabinets excl. rail (double door)
760660243	Double door cabinet rail - left GN 2/1 U-shape
760660244	Double door cabinet rail - right GN 2/1 U-shape
760660118	Set of 4 stainless legs 130-180mm
760660022	Set of 4 castors 125mm
760660430	Master key

HIGHLIGHTS

- Removable gaskets
- Monoblock
- Round edges inside
- Airflow guide
- Low sound level
- 1 right hand and 1 left hand hinged door
- Automatic door closing
- Door lock x 2
- Pedal door opener x 2
- 8 grey shelves (530 x 650mm)
- LED lighting
- Castors, H = 125mm
- Complete wall rails, Shelf support

SPECIFICATIONS

W80



2/1 GN



	PREMIER K W80 C DR U	PREMIER M W80 C DR U	PREMIER F W80 C DR U	PREMIER KG W80 C DR U
Item number	171802030	172802030	173802030	174802030
Temperature range	+2°C/+12°C	-5°C/+12°C	-25°C/-5°C	+2°C/+12°C
Volume, gross (ltr.)	700	700	700	700
Net usable volume (ltr.)	475	475	475	475
Outside dimensions, W x D x H (mm)	810 x 800 x 2075 (inc. castors)	810 x 800 x 2075 (inc. castors)	810 x 800 x 2075 (inc. castors)	810 x 800 x 2075 (inc. castors)
Weight (kg)	125	125	125	130
Weight, packed (kg)	135	135	135	140
Refrigeration capacity at -10°C (Watt)	206	206	-	206
Refrigeration capacity at -25°C (Watt)	-	-	376	-
Connection	230V / NPE 50 Hz	230V / NPE 50 Hz	230V / NPE 50 Hz	230V / NPE 50 Hz
Connection load (Watt)	120	120	520	120
Energy efficiency class	A	A	C	B
Energy consumption (kW/24h)	0.925	0.925	4.87	1.204
Sound level db(A)	48	48	52	48
Climate class	5	5	5	4
GWP	3	3	3	3
Refrigerant	R600a	R600a	R290	R600a
Number of shelves	4	4	4	4
Maximum number of shelves	18	18	18	18

ITEM NUMBER	ADD ON
760660433	Shelf (grey) with back guard for GN 2/1 wide cabinets excl. rail
760660438	Shelf (stainless steel) with back guard for GN 2/1 wide cabinet excl. rail
760660443	Shelf (grey) for GN 2/1 wide cabinets excl. rail (bottom)
760660439	Shelf (stainless steel) with back guard for GN 2/1 wide cabinet excl. rail (bottom)
760660447	Set of (stainless steel) shelves (3 top + 1 bottom) with back guard for GN 2/1 wide cabinets excl. rail
760660118	Set of 4 stainless legs 130-180mm
760660022	Set of 4 castors 125mm
760660430	Master key

HIGHLIGHTS

- Removable gaskets
- Monoblock
- Round edges inside
- Airflow guide
- Low sound level
- Right hand hinged reversible door
- Automatic door closing
- Pedal door opener with safety release
- 4 grey shelves (650 x 530mm)
- LED lighting
- Door lock
- Castors, H = 125mm

SPECIFICATIONS

60



1/1 EN



	PREMIER K 60 C DR U	PREMIER M 60 C DR U	PREMIER F 60 C DR U	PREMIER KG 60 C DR U
Item number	171602030	172602030	173602030	174602030
Temperature range	+2°C/+12°C	-5°C/+12°C	-25°C/-5°C	+2°C/+12°C
Volume, gross (ltr.)	480	480	480	480
Net usable volume (ltr.)	335	335	335	335
Outside dimensions, W x D x H (mm)	610 x 920 x 2075 (inc. castors)	610 x 920 x 2075 (inc. castors)	610 x 920 x 2075 (inc. castors)	610 x 920 x 2075 (inc. castors)
Weight (kg)	110	110	110	115
Weight, packed (kg)	120	120	120	125
Refrigeration capacity at -10°C (Watt)	206	206	-	206
Refrigeration capacity at -25°C (Watt)	-	-	376	-
Connection	230V / NPE 50 Hz	230V / NPE 50 Hz	230V / NPE 50 Hz	230V / NPE 50 Hz
Connection load (Watt)	120	120	310	125
Energy efficiency class	A	A	C	B
Energy consumption (kW/24h)	0.785	0.785	4.13	1.023
Sound level db(A)	46	46	51	46
Climate class	5	5	5	4
GWP	3	3	3	3
Refrigerant	R600a	R600a	R290	R600a
Number of shelves	4	4	4	4
Maximum number of shelves	22	22	22	22

ITEM NUMBER	ADD ON
760660431	Shelf (grey) with back guard for EN 1/1 cabinet excl. rail
760660440	Shelf (stainless steel) with back guard for EN1/1 cabinet excl. rail
760660446	Set of (stainless steel) shelves (4) with back guard for EN 1/1 cabinets excl. rail
760660432	Set of 2 rails for EN1/1 cabinet U-shape
760660118	Set of 4 stainless legs 130-180mm
760660022	Set of 4 castors 125mm
760660430	Master key

HIGHLIGHTS

- Removable gaskets
- Monoblock
- Right hand hinged reversible door
- Automatic door closing
- Pedal door opener with safety release
- 4 grey shelves (400 x 600mm)
- LED lighting
- Door lock
- Castors, H = 125mm
- Complete wall rails, Shelf support

SPECIFICATIONS

BW80



2/1 GN



PREMIER K BW80 DR U

PREMIER M BW80 DR U

PREMIER F BW80 DR U

PREMIER KG BW80 DR U

	PREMIER K BW80 DR U	PREMIER M BW80 DR U	PREMIER F BW80 DR U	PREMIER KG BW80 DR U
Item number	171800030	172800030	173800030	174800030
Temperature range	+2°C/+12°C	-5°C/+12°C	-25°C/-5°C	+2°C/+12°C
Volume, gross (ltr.)	610	610	610	610
Net usable volume (ltr.)	457	457	457	457
Outside dimensions, W x D x H (mm)	830 x 770 x 1970	830 x 770 x 1970	830 x 770 x 1970	830 x 770 x 1970
Weight (kg)	130	130	130	135
Weight, packed (kg)	140	140	140	145
Refrigeration capacity at -10°C (Watt)	206	206	-	206
Refrigeration capacity at -25°C (Watt)	-	-	376	-
Connection	230V / NPE 50 Hz	230V / NPE 50 Hz	230V / NPE 50 Hz	230V / NPE 50 Hz
Connection load (Watt)	120	120	370	120
Energy efficiency class	A	A	C	B
Energy consumption (kW/24h)	0.911	0.911	4.959	1.184
Sound level db(A)	48	48	51	48
Climate class	5	5	5	4
GWP	3	3	3	3
Refrigerant	R600a	R600a	R290	R600a
Number of shelves	4	4	4	4
Maximum number of shelves	22	22	22	22

ITEM NUMBER

ADD ON

760660433	Shelf (grey) with back guard for GN 2/1 wide cabinets excl. rail
760660438	Shelf (stainless steel) with back guard for GN 2/1 wide cabinet excl. rail
760660448	Set of (stainless steel) shelves (4) with back guard for GN 2/1 wide cabinets excl. rail
760660434	Set of 2 rails for bottom mount cabinets, U-shape
760660430	Master key

HIGHLIGHTS

- Removable gaskets
- Round edges inside
- Airflow guide
- Low sound level
- Right hand hinged reversible door
- Automatic door closing
- Integrated castors
- 4 grey shelves (650 x 530mm)
- LED lighting
- Door lock
- Complete wall rails, Shelf support



HOSHIZAKI

When cool becomes brilliant

Hoshizaki Europe B.V. Headquarters Export EMENA, Burgemeester Stramanweg 101, 1101 AA Amsterdam, the Netherlands
sales@hoshizaki.nl +31 (0)20 691 84 99 www.hoshizaki-europe.com