

NW 307

EASY

EcoX

Scotsman
Ice Systems

Modular Ice Machine 190 kg

Item #:
Project:
Quantity:



FEATURES

- Vertical Cube System.
- T304 Stainless Steel Panels.
- Auto-alert Indicator Lights.
- Global standard footprint: strictly follows international imperial standards commonly adopted in the industry of reference.
- One touch cleaning: reduces labor costs and saves time and simplifies cleaning process.
- Front evaporator access: immediate access to the evaporating plate for quick self-maintenance operations.
- Head only ice maker: requires a separate storage bin to collect the ice produced.



NW 307
Dice 10 g
W 22 x D 22 x H 22 mm



NW H 307
Half Dice 6 g
W 10 x D 22 x H 28 mm



NW L 307
Large Dice 15 g
W 28 x D 22 x H 28 mm

CONDENSING SYSTEM

Air cooled

REFRIGERANT GAS

R290

VOLTAGE V/Hz/ph

230/50/1

RECOMMENDED BINS

Head	Bins		kg
NW 307	✓	SB193	129
	✓	SB322	168
	CBT30EMCD	SB393	181
	CBT30EMCD	SB530	243

LEGEND:

- ✓ : Perfect combination between ice maker and bin
- : Ice chute cut-out performed upon installation
- CBTxxxxxxxx : need additional bin top

CERTIFICATIONS



OPERATING REQUIREMENTS

	Minimum	Maximum
Air temperature	10	40
Water temperature	5	35
Water pressure	1 bar (14 psi)	5 bar (70 psi)
Electrical voltage	-10	10

IMPORTANT NOTICE:
Models and specifications are subject to change without notice.
This spec sheet is meant for commercial purpose only.
For technical documentation please refer to our service manuals.

Download our free **App Scotsman Ice**
Apple store
Google play
Windows store



www.scotsman-ice.it
www.scotsman-ice.com

Modular Ice Machine 190 kg


NW 307



Modular Ice Machine 190 kg

Item #:
Project:
Quantity:

Modular Ice Machine 190 kg

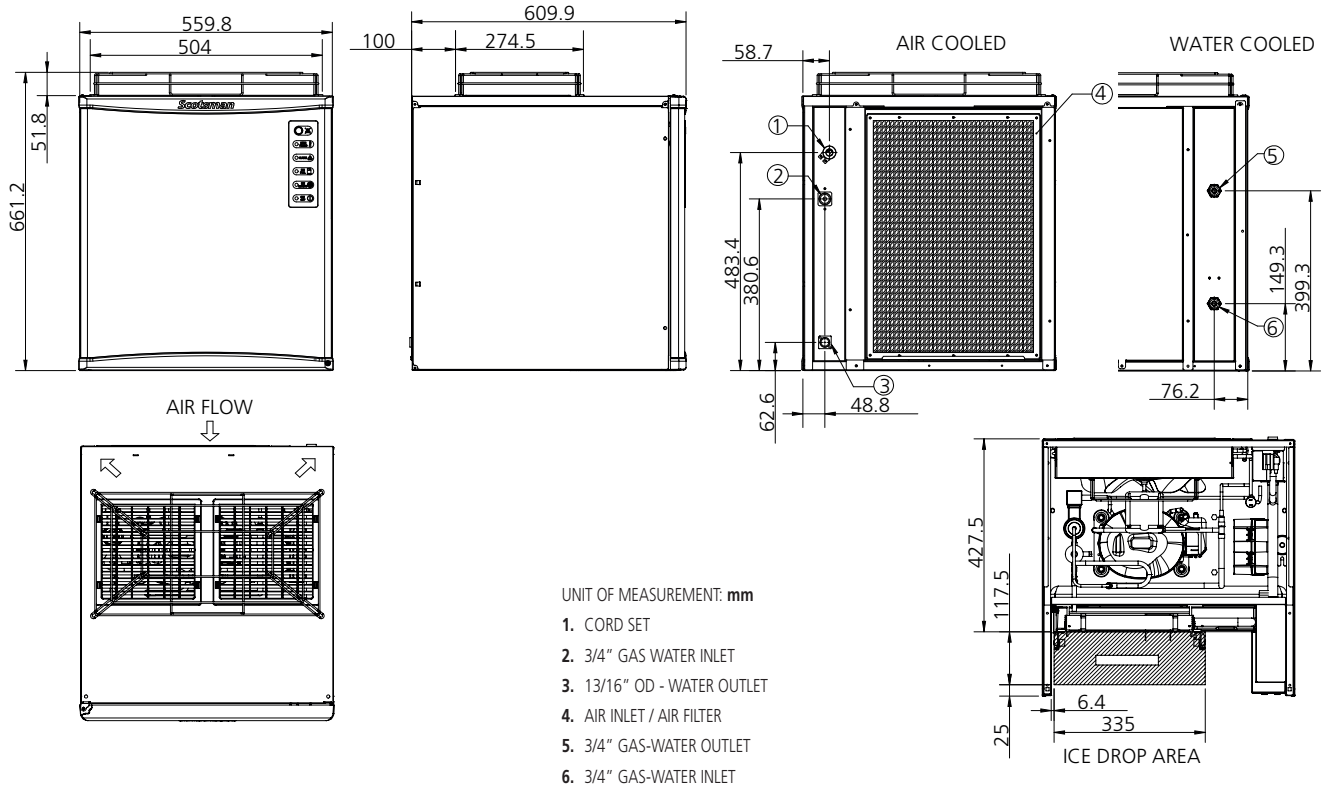

UNIT DATA		SHIPPING DATA									
Size (W x D x H)	560 x 610 x 609 mm	Carton (W x D x H)	620 x 680 x 800 mm								
Net weight	54 kg	Weight	63 kg								
		24 h ice production kg °C Amb. / °C Water			Energy consumption (*)		Water usage (*)	Instant power	Compressor	Circuit wires	Max. fuse size
Version	Voltage	10°C/10°C kg	21°C/10°C kg	32°C/21°C kg	kWh/ 100 kg	kWh/ 24h	l/h	W	W	No. x Ømm²	A
NW 307 AS	230/50/1	190	175	120	15.9	19.0	8.3	910	2941	3 x 1.5	16
NW H 307 AS	230/50/1	160	164	118	16.8	19.8	8.1	910	2941	3 x 1.5	16
NW L 307 AS	230/50/1	190	180	130	14.2	18.5	9.0	910	2941	3 x 1.5	16

(*) Data refer to 32°C Amb. / 21°C Water temperature conditions