



PANTHER

PRODUCT OPTIONS AND ACCESSORIES

- CP16 CP16 - CARVERY PAD [1/1 GASTRONORM SIZE]
- PLK/S PANTHER LEG KIT FOR CONVERSION IN THE FIELD
- PGK1 PGK1 - GASTRONORM PACK
- PGK2 PGK2 - GASTRONORM PACK
- PGK3 PGK3 - GASTRONORM PACK
- PGK4 PGK4 - GASTRONORM PACK
- PGK7 PGK7 - GASTRONORM PACK
- PHTC PHTC - CERAMIC INSERT [1/1 GASTRONORM SIZE]
- PHTG PHTG - GLASS INSERT [1/1 GASTRONORM SIZE]

PRODUCT FEATURES

- Helping to cater in demanding environments such as cafeterias, canteens and restaurants
- Pass through model with removable sliding doors to both sides provide enhanced workflow efficiency
- Fan assisted hot cupboard provides even heat distribution, fast heat up and recovery times, and lower energy usage. Four shelf positions allow adjustment to meet individual needs.
- Fully 1/1 GN compatible hot cupboard for operational efficiency. Units available to take 6 x 1/1 GN containers up to 150mm deep.
- Thermostatically controlled bain marie top can be operated with wet or dry heat. Accurate digital electronic control of the hot cupboard temperature, adjustable between 20 and 99 °C, ensures compliance with food hygiene regulations
- Double skinned construction provides efficient heat retention and a cool to touch exterior - safe and energy efficient. Removable doors and shelves allow access to the fully stainless steel interior for easy cleaning
- Supplied with two heavy duty multi-section chrome plated rod shelves capable of taking the heaviest loads
- Drain tap located inside the hot cupboard allows fast and easy draining

AIA FILE NUMBER:

ITEM NUMBER:



LINCAT PANTHER 800 SERIES FREE-STANDING HOT CUPBOARD - BAIN MARIE TOP - 6GN - W 2180 MM - 5.2 KW

MODEL: P8B6PT

WEIGHTS & DIMENSIONS

Width	2180 mil
Depth	850 mil
Height	912 mil
Weight	167 kg

SHIPPING DETAILS

Ship Width	222 cm
Ship Depth	90 cm
Ship Height	110 cm
Ship Weight	183.7 kg
Ship Method	LTL Common Carrier
Shipping Package Type	Pieces
Shipping Origin Zip Code	LN6 3QZ, UNITED KINGDOM
Quick Ship Product	No

PRODUCT CERTIFICATIONS



ENERGY SPECS

Primary Energy Type	Electric	Electrical Plug Type	UK 3-Pin Plug
Electrical Total Amperage	22.6 A	Number of Electrical Plugs	1
Electrical Volts	230V	Electrical Connection Type	Cord and Plug
Electrical Total Wattage	5200 W	Number of Electrical Conductor Wires	1
Electrical Kilowatts	5.2 kW	Dedicated Circuit Required	No
Electrical Phase	1-Phase	Electrical Remarks	Single

ADDITIONAL SPECIFICATIONS

Plate Diameter Maximum	12.75 in	Number of Doors	4
Plate Diameter Minimum	11.25 in	Number of Shelf Positions	4
Cart Style	Plated Meals and Pans	Number of Shelves	2
Construction Materials	Stainless Steel	Plate Capacity	556
Control Type	Digital Touch Pad, Electronic	Shelf Depth	512 mm
Gastronorm Capacity	6 x GN1/1	Shelf Width	1929 mm
Heating System	Electric	Temperature Maximum	99 °C
		Temperature Minimum	20 °C


Lincat reserves the right to modify specifications or discontinue models without incurring obligation. Dimensions nominal.

Document Auto-Generated
March 25, 2025

BIDDING SPECIFICATIONS (SHORT FORM SPECS)

Bidding Specifications Not Available.

TECHNICAL DRAWING

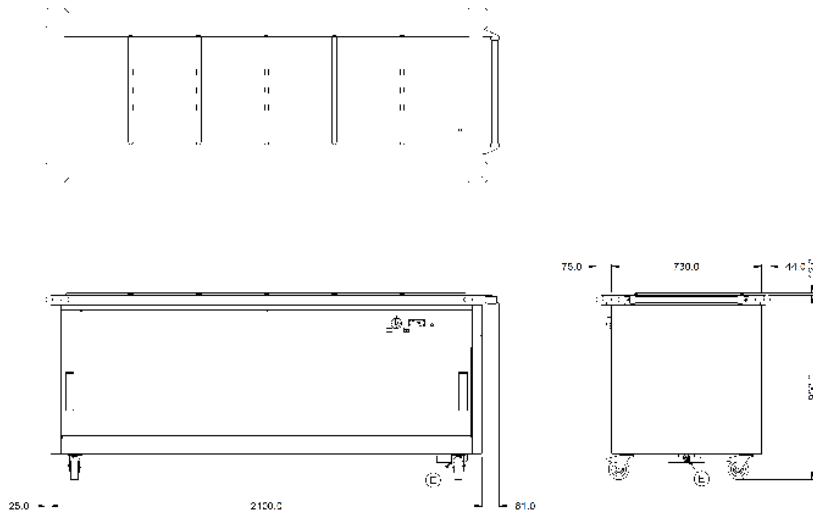

Lincat reserves the right to modify specifications or discontinue models without incurring obligation. Dimensions nominal.

Document Auto-Generated
March 25, 2025