



Product Code: EP1/2L

EcoPro G2 Freezer Counter



Features & Benefits

- High Quality 304 Stainless Steel Exterior Build Quality
- ECA Scheme Approved - as ECA products are guaranteed to be energy efficient, money can be claimed back on your investment
- Smartphone style' touch sensitive hidden until lit control pannel
- Fully floating lock provides durable security and prevents lock breakage if the key is left in
- Energy-saving Hydrocarbon refrigerant option at no extra cost
- High performance cyclopentane foam
- Airlines' ventilation system reduces compressor running time by 15%
- Take the travel out of food preparation
- Reduce width option available on request

Shelving

4 shelves (GN1/1)	Standard
Gastronorm Pans	Option
Additional S/S Trayslides	Option
Additional GN1/1 Shelf	Option

Refrigeration

R290 - Energy Efficient	Standard
Integral Refrigeration System	Standard
RH Mounted Ref Unit	Option

Specification

Freezer -18/-21°C	Standard
Width (mm)	1415
Depth (mm)	700
Height (mm)	865
Unpacked weight (Kgs)	123
Packed weight (Kgs)	140
Gross Volume (Ltr)	280

Base Fittings

Remote Refrigeration System	Option
Castors 80mm	Standard
100mm legs in lieu of castors	Option
Legs 150mm	Option
Marine Spec Legs - 150mm	Option

Electrical & Service Data

Connect Load	430
230/50/1	Standard
220/60/1 Electrical Supply	Option
Fuse Required (A)	10
Refrigerant Charge (kg)	0.14

Finish

304 s/s ext & alu int	Standard
304 s/s	Option
304 S/S back for island sitting	Option
Worktop	Standard

Doors

Left and right hinged door	Option
Solid	Standard

Product Extras

Helicoil Mains Lead	Option
Less Worktop	Option

Energy

AEC	2401.43
Nett Volume	172.3
Energy Grade	D
Global Warming Potential	3
Energy Efficiency Index	70.92


Footnotes

- Castors not available if product supplied less condensing unit
- 100mm leg option: height ranges from 835 to 865mm (replacement for standard castors). 150mm legs: height ranges from 885 to 935mm
- Depth with door open is 1113mm
- Decibel rating measured 1m high from the floor and 1m out from the counter
- 60Hz model supplied as 220v machine with separate transformer for conversion to 115v supply.
- Adequate airflow must be kept around the counter: 150mm

Energy Performance Data and information



Foster Refrigerator - a division of ITW Ltd
Oldmedow Road, KING'S LYNN, Norfolk PE30 4JU
Tel: 0843 216 8800 Fax: 0843 216 4700
Registered in England No. 00559693
VAT No. GB 792 4414 16

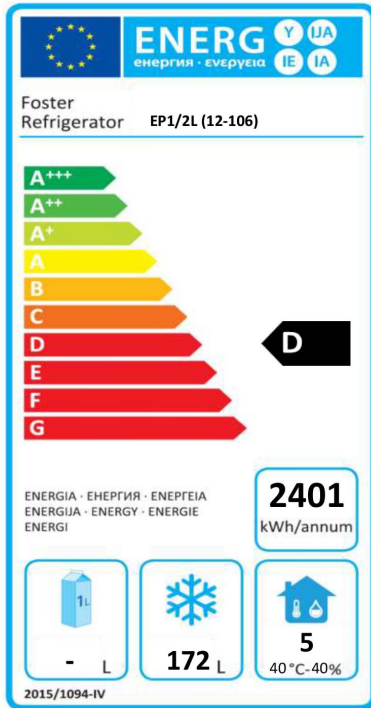

Master data version: Ver.01.0014A8

Generated: 31/05/2019

Application

This appliance is intended for use in ambient temperatures up to {1}°C

Safety

Precautionary instructions and maintenance advice, to ensure efficient operation, can be found in this products operating instructions.

Recycling

For recycling and end of life care for this product, please refer to environmental section of the website or visit [our policies](#)



Energy



Quality



Value



Design



Hygiene



After Care

Foster Refrigerator, Oldmedow Road, King's Lynn, Norfolk, PE30 4JU
Phone 08432 168800 | Email sales@foster-uk.com | Visit www.fosterrefrigerator.com

All images shown are for illustration purpose only. All images and photographs are not intended to be relied upon for, nor to form part of, any contract unless specifically incorporated in writing into the contract. Solely the dimensions and specifications incorporated in the quotation or purchase order confirmation shall be contractually binding.