




Side Elevation
(Ventilation Space)

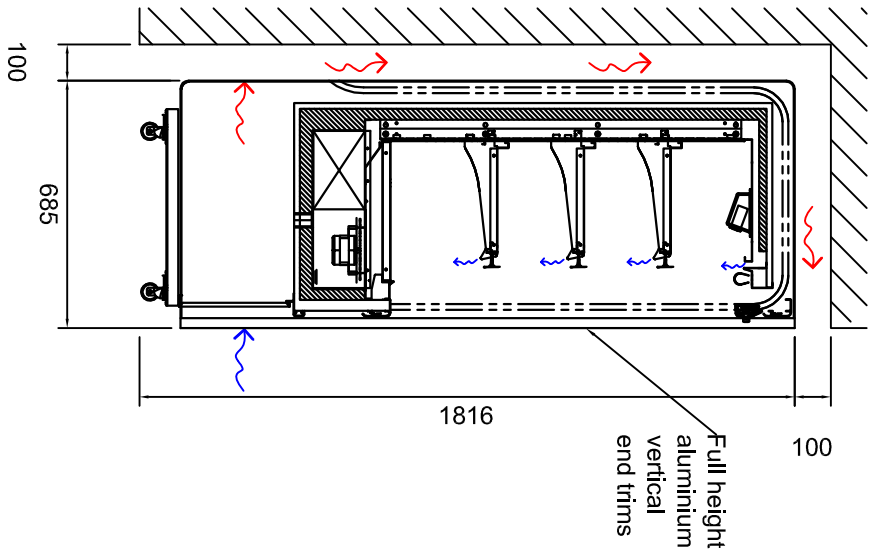

Side Elevation
(Shelving Heights)

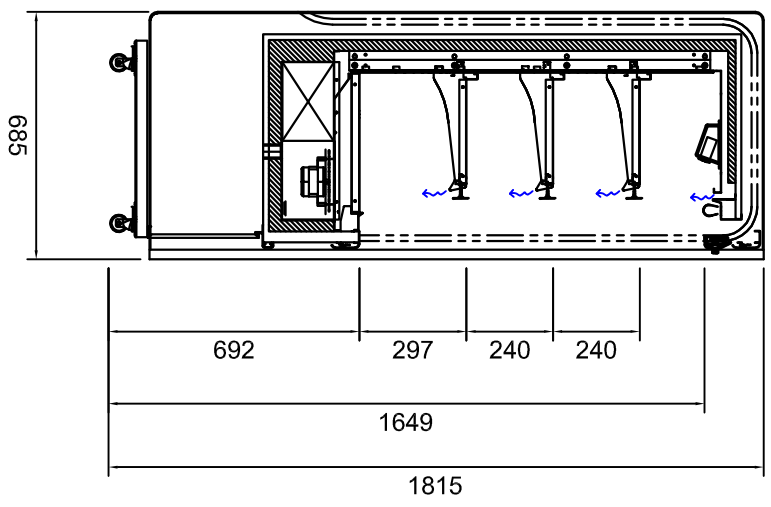

Front Elevation

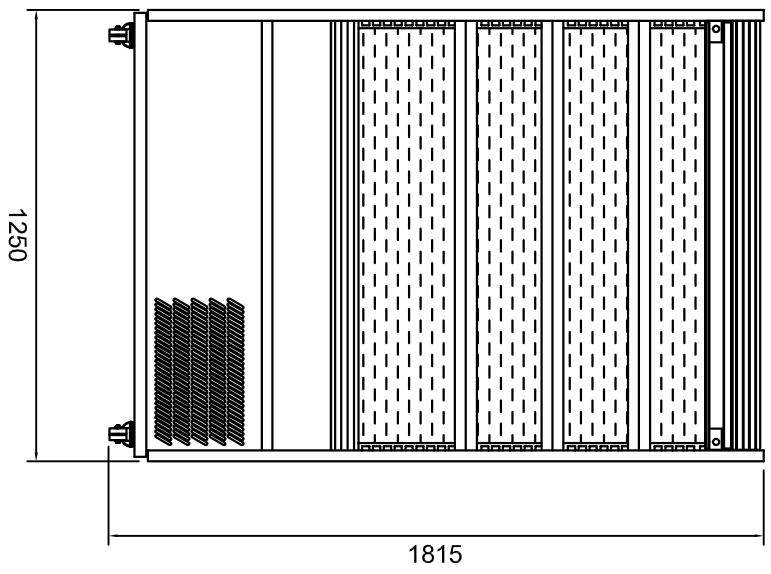

WILLIAMS REFRIGERATION RETAIN COPYRIGHT ON THIS DRAWING.
DO NOT SCALE FROM DRAWING. USE MARKED DIMENSIONS.
WILLIAMS REFRIGERATION ARE TO BE NOTIFIED OF ANY DISCREPANCIES IMMEDIATELY.

Multideck requires a minimum ventilation void of 100mm behind and above unit for heat to escape.

Electrical supply: 1 Phase
13amp UK standard plug top

Multideck Features	
<input checked="" type="checkbox"/> W	White Finish
<input checked="" type="checkbox"/> S	Mirror Stainless Finish
<input checked="" type="checkbox"/> C	Castors
<input checked="" type="checkbox"/> F	Feet (For Remote Units Only)
<input checked="" type="checkbox"/> N	Nightblind
<input checked="" type="checkbox"/> S	Security Shutter
<input checked="" type="checkbox"/> RE	Remote Refrigeration Unit
Only checked features are included	

Multideck Options	
<input type="checkbox"/> SH	Additional Shelf
<input type="checkbox"/> SNB	Snack Basket (Hook On)
<input type="checkbox"/> TS	Tray Slide
<input type="checkbox"/> SRD	Solid Rear Loading Doors
<input type="checkbox"/> GRD	Glass Rear loading Doors
<input type="checkbox"/> MT	Meat Temperature
<input type="checkbox"/> RAL	Coloured Finish (RAL)
<input type="checkbox"/> AV	Alternative Voltage
Only checked options are included	

Maximum operating ambient temperature +25 deg.c, (climate class 3).
Manufacturing dimensional tolerance +/- 3mm.



Client:

Standard Product

Project:

Standard Product

Title:

R125-WCS R1 - R Series Multideck Security Shutter Model White Finish

Drawn By:

PPR

Date:

01/07/17

DWG No:

R125-WCS R1

REV:

B

Williams Refrigeration Southern Kent

T: +44 (0) 1892 835525

F: +44 (0) 1892 835526

E: estimating@williams-southern.co.uk