




Side Elevation
(Ventilation Space)

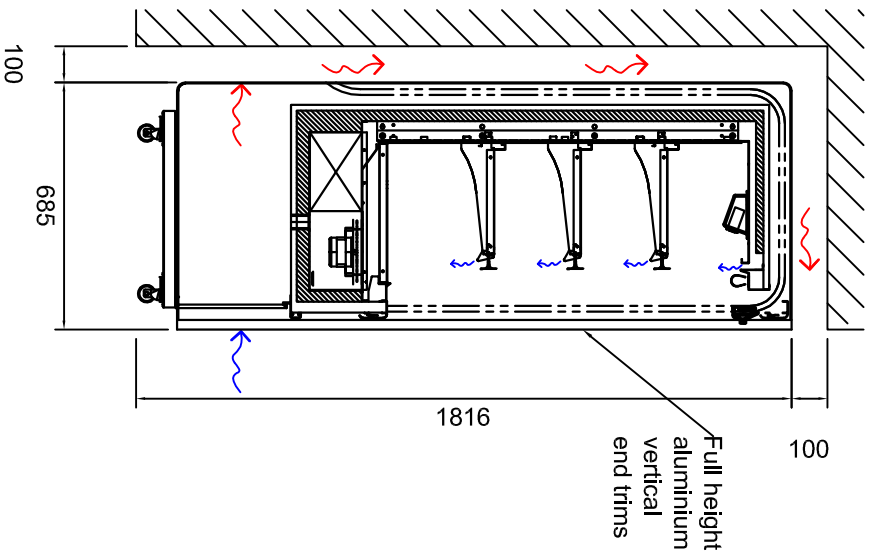

Side Elevation
(Shelving Heights)

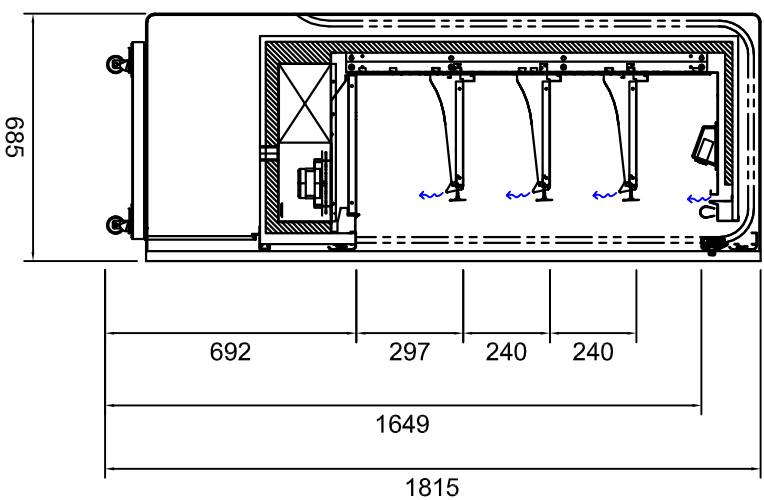

Front Elevation

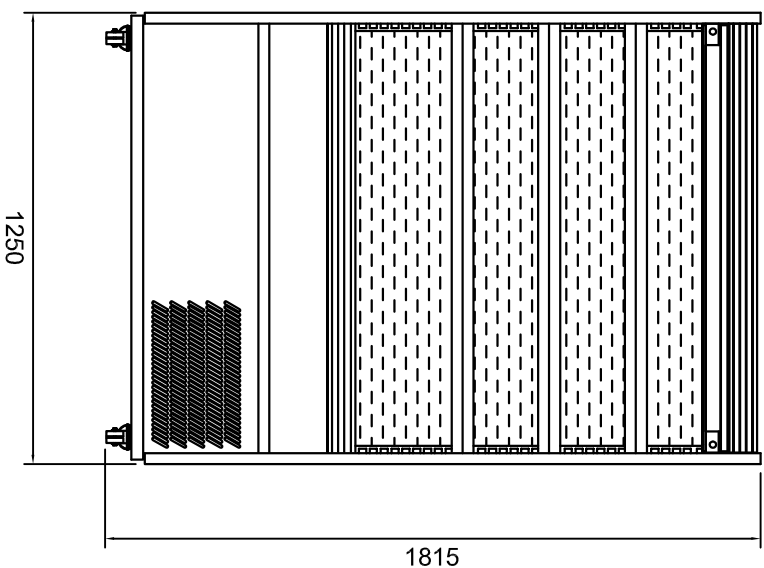

WILLIAMS REFRIGERATION RETAIN COPYRIGHT ON THIS DRAWING.
DO NOT SCALE FROM DRAWING. USE MARKED DIMENSIONS.
WILLIAMS REFRIGERATION ARE TO BE NOTIFIED OF ANY DISCREPANCIES IMMEDIATELY.

Multideck requires a minimum ventilation void of 100mm behind and above unit for heat to escape.

Electrical supply: 1 Phase
13amp UK standard plug top

Multideck Features	
☒ W	White Finish
☒ S	Mirror Stainless Finish
☒ C	Castors
☐ F	Feet (For Remote Units Only)
☐ N	Nightblind
☒ S	Security Shutter
☐ RE	Remote Refrigeration Unit
Only checked features are included	

Multideck Options	
☐ SH	Additional Shelf
☐ SNB	Snack Basket (Hook On)
☐ TS	Tray Slide
☐ SRD	Solid Rear Loading Doors
☐ GRD	Glass Rear Loading Doors
☐ MT	Meat Temperature
☐ RAL	Coloured Finish (RAL)
☐ AV	Alternative Voltage
Only checked options are included	

Maximum operating ambient temperature +25 deg.c, (climate class 3).
Manufacturing dimensional tolerance +/- 3mm.



Williams Refrigeration Southern

F: +44 (0) 1892 835525

E: estimating@williams-southern.co.uk

Williams Refrigeration Southern

F: +44 (0) 1892 835525

E: estimating@williams-southern.co.uk

Client:	Standard Product		Title:	R125-SCS R1 - R Series Multideck Security Shutter Model Mirror Stainless Finish		Drawn By:	PPR	Date:	01/07/17
Project:	Standard Product					DWG No:	R125-SCS R1	REV:	B