

Opus 700 Ranges

Key Features

- Type: Gas
- Low level rear flue
- Full depth dished hob
- Cast iron twin pan supports
- Oven with thermostatic temperature control (120 – 280 °C)
- Manual ignition
- Removable oven base liner
- Four shelf positions
- Shelves with safety stops
- Side-hinged oven doors (180° opening)
- Supplied with two shelves
- Supplied with Piezo ignitor wand
- Supplied on castors



OG7002

Construction

- Body: stainless steel grade 430
- Hob top: stainless steel grade 304
- Pan supports: painted cast iron
- Liner: enamelled steel
- Chrome plated shelves

Available Options

- Natural gas
- Propane gas
- Adjustable legs
- Cast iron pan supports


Available Accessories

- OA7901 – Splashback/plate shelf for model OG7001
- OA7902 – Splashback/plate shelf for model OG7002
- OA7903 – Drop on –griddle plate
- OA7940 – Flue extension for model OG7001
- OA7941 – Flue extension for model OG7002
- OA7942 – Single pan support





Specifications

Model	OG7001	OG7002
External height (mm)	950 - 980	950 - 980
External width (mm)	600	900
External depth (mm)	750	750
External depth excluding handles (mm)	737	737
Usable oven capacity h x w x d (mm)	430 x 510 x 525	430 x 710 x 525
Oven shelf size w x d (mm)	510 x 525	710 x 525
Net weight unpacked (kg)	85	114
Gross weight packed (kg)	114	141
Shipping volume (m ³)	0.595	0.745
Oven	1 gas burner	1 gas burner
Hob	4 gas open burners	6 gas open burners
Heat input oven burner Natural (kW)	6.8	9.0
Heat input oven burner Propane (kW)	6.8	8.5
Heat input per hob burner Natural (kW)	6.1	6.1
Heat input per hob burner Propane (kW)	5.7	5.7
Total heat input Natural (kW)	31.2	45.6
Total heat input Propane (kW)	29.6	42.7
Gas consumption at full rate Natural (m ³ h ⁻¹)	2.97	4.35
Gas consumption at full rate Propane (kg h ⁻¹)	2.13	3.09
Gas inlet	G ½ female	G ¾ female
Btu/h conversion	kW x 3412	

OG7001

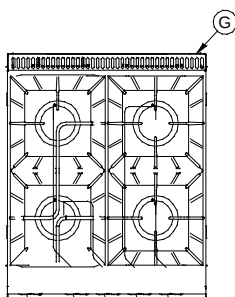

OG7002

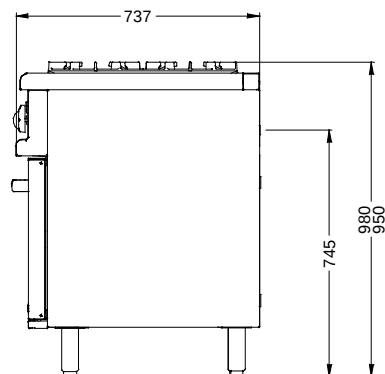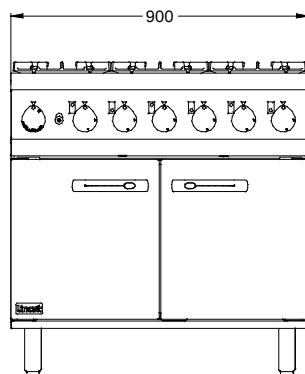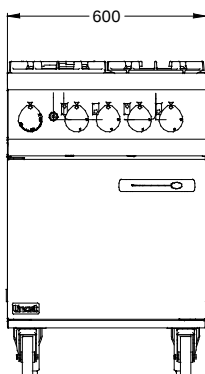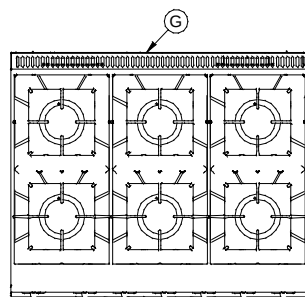

Lincat Limited, Whisby Road,
Lincoln LN6 3QZ,
United Kingdom

UK Sales Tel: 01522 875500 UK Spares Tel: 01522 875510 UK General Tel: 01522 875555
UK Fax: 01522 875530 International Sales Tel: +44 1522 503250 International Fax: +44 1522 875530
Website: www.lincat.co.uk UK Sales e-mail: sales@lincat.co.uk International Sales e-mail: export@lincat.co.uk



Document ref:
OPUSGASRANGE
Issue date: Oct-09