

Modular Ice Machine 216 kg



Item #:
Project:
i roject.
Quantity:
*



FEATURES

- Vertical Cube System.
- T304 Stainless Steel Panels.
- Auto-alert Indicator Lights.
- Global standard footprint: strictly follows international imperial standards commonly adopted in the industry of reference.
- One touch cleaning: reduces labor costs and saves time and simplifies cleaning process.
- Front evaporator access: immediate access to the evaporating plate for quick self-maintenance operations.
- Stackable: add flexibility!
- Head only ice maker: requires a separate storage bin to collect the ice produced.



NW 457 Dice 10 g W 22 x D 22 x H 22 mm

CONDENSING SYSTEM	RECOMMENDED BINS					
	Head	kg				
Air cooled		✓	SB393	181		
	NW 457	>	SB530	243		
		CBT48EAMCD CBT48FMCD	SB948	406		



NW H 457 Half Dice 6 g W 10 x D 22 x H 28 mm

> **VOLTAGE** V/Hz/ph

REFRIGERANT GAS

R290



NW L 457 Large Dice 15 g W 28 x D 22 x H 28 mm

230/50/1

LEGEND:

✓ : Perfect combination between ice maker and bin : Ice chute cut-out performed upon installation CBTxxxxxxxxx : need additional bin top

IFICATIONS



OPERATING REQUIREMENTS

	Minimum	Maximum
Air temperature	10	40
Water temperature	5	35
Water pressure	1 bar (14 psi)	5 bar (70 psi)
Electrical voltage	-10	10

IMPORTANT NOTICE:

and specifications are without notice. sheet is meant for comm only. nical documentation please refer to

Download our free App Scotsman Ice Apple store Google play Windows store


www.scotsman-ice.it www.scotsman-ice.com





Modular Ice Machine 216 kg

Item #: Project: Quantity:

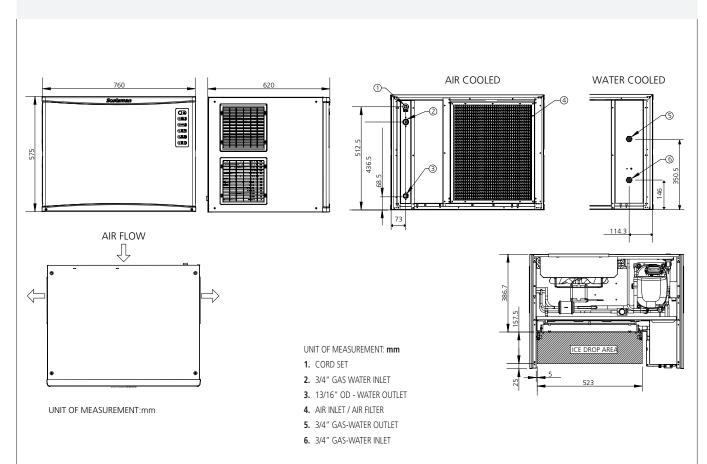

UNIT DATA		SHIPPING DATA						
Size (W x D x H)	760 x 620 x 575 mm	Carton (W x D x H)	830 x 690 x 720 mm	ı				
Net weight	73 kg	Weight	87 kg	87 kg				
			<u> </u>			1	1	1

		9		5	9						
		24 h ice production kg °C Amb. / °C Water		,		Water usage (*)			Circuit wires	Max. fuse size	
Version V	Voltage	10°C/10°C	21°C/10°C	32°C/21°C	kWh/	kWh/	1 I/h	W	w	No. x Ømm²	A
	Voltage	kg	kg	kg	100 kg	kg 24h					
NW 457 AS	230/50/1	216	204	157	12.8	20.1	11.5	960	2941	3 x 1.5	16
NW H 457 AS	230/50/1	216	208	146	14.1	20.6	10.1	960	2941	3 x 1.5	16
NW L 457 AS	230/50/1	220	208	154	13.2	20.4	10 3	960	2941	3 x 1 5	16

(*) Data refer to 32°C Amb. / 21°C Water temperature conditions