




## HydroTap G5 Classic Plus boiling chilled 160/175

Boiling Chilled

 **Finish:** Bright Chrome

**Product code:** H55704Z00UK

**Capacity:** Up to 60 Users

The world's most advanced drinking water system, the HydroTap Classic Plus delivers a choice of instant filtered boiling and chilled water for workplaces of all sizes. From a single tap and under counter command centre, the Classic Plus dispenses only the purest tasting water, filtered to a market-leading 0.2 micron - 25 times more effective than a standard water filter jug. To prioritise user safety, the HydroTap doesn't splash or spit when dispensing water, and features two boiling water safety modes and a cool to touch tap. What's more, the HydroTap features superior technology to conserve water while saving energy and time.

# Details

## Features & benefits

Advanced filtration - Market leading 0.2 micron MicroPurity filtration technology filters out dirt, lead, cysts and microplastics, providing 25 times more effective filtration than a standard water filter jug.

Environmentally conscious operation - The HydroTap employs water-conserving air-cooled chilling technology with R290 refrigerant and energy saving sleep modes for maximum efficiency.

Unique user-safety options - Designed with safety in mind, the Zip HydroTap features cool touch tap and safety lock features to enhance the user experience. The boiling point is factory set to 98°C to ensure smooth, safe, non-sputtering water delivery.

Enhanced hygiene - The 5th generation HydroTap command centre has SteriTouch embedded in key components of the water path. This reduces surface bacteria by 99.99%.

Power-Pulse technology - Minimises power consumption by regulating power during heating and maintains stored boiling water to within 0.2°C of set temperature, meaning water is always dispensed at the desired temperature.

# Specifications

Product name	HydroTap G5 Classic Plus boiling chilled 160/175
Product code	H55704Z00UK
Filtered water type	BC
Product approvals	CE, UKCA
Warranty	Appliance warranty 24 months plus additional 36 months boiling tank warranty

# Capacity, weight & dimensions

Number of people	Up to 60 Users
Boiling cups per hour	160
Chilled cups per hour	175

# Plumbing

Water supply requirements	Cold
Water connection	1/2" BSP
Water valves	Integrated dual check valve
Water pressure	Min 1.7 bar - Max 5 bar

# Electrical

Power rating	2.1kW 230v 50/60 Hz
Power supply/voltage	1 × 13 amp

# Tap design

Tap	HydroTap Classic Plus bright chrome
HydroTap style	Classic Plus
Finish	Bright Chrome
Disability options	No
Tap rotation	Fixed
Installation hole size	35mm

# Command centre


Dimensions	W394mm x D487mm x H373mm
Factory temperature boiling	98°C
Factory temperature chilled	6-10°C
Filtration	Internal Zip MicroPurity 0.2 micron 0.2 micron filter
Flow rate	Boiling - 4 l/min Chilled - 4 l/min
Refrigerant	R290
Weight	28
Tank material	PPS

# Installation

## Installation requirements

'1. Installation and connection of your Zip HydroTap must be carried out by a qualified person, observing national and local regulations.2. You will require suitable mains electrical and drinking water connections, plus waste water drainage all within 1 metre of the product.3. HydroTap is air-cooled so discrete cabinetry cut-outs are required for ventilation.4. Installation on most bench tops is straightforward however some stone bench tops may require a specialised cutting service.5. If you live in a hard water area, we recommend installation of a Zip scale filtration kit.6. Installation by Zip Professional Service can be arranged with a phone call or through [www.zipindustries.co.uk](http://www.zipindustries.co.uk)'

## Files

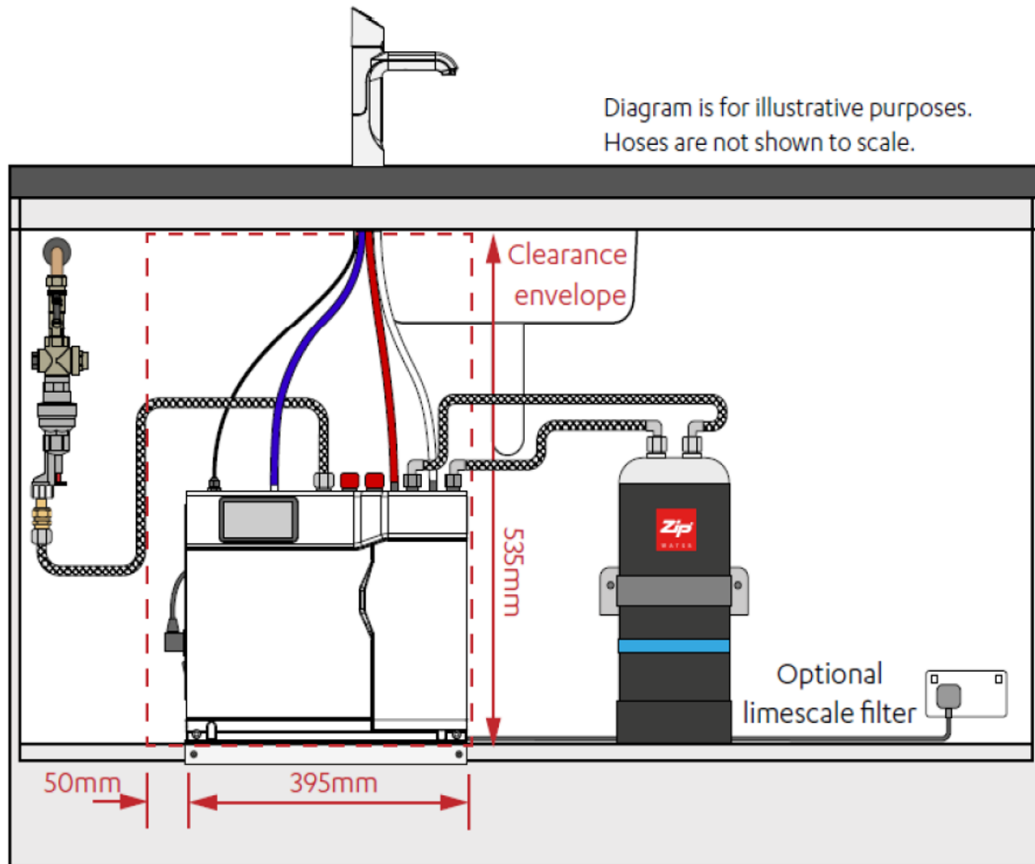

BC160 / 175 HydroTap

↓ Command centre diagram 2

↓ Font diagram 2

↓ Tap diagram

↓ Command centre diagram 3

↓ Tap & font diagram

↓ Tap extension piece diagram

# Certifications



↓ Declaration of Conformity (PDF)




↓ WRAS certificate (PDF)

# BIM files



↓ ArchiCAD Zip Water Library (LCF)



↓ AutoCAD Plan (ZIP)



↓ IFC (ZIP)



↓ Revit Product File (ZIP)



↓ Revit Virtual Showroom (RVT)

↓ Download all

# Manuals



↓ Quick guide (PDF)



↓ Tap manual (PDF)



↓ Tap operation label (PDF)



↓ Instruction manual (PDF)



↓ User manual (PDF)

↓ Download all

# Brochure



↓ Product brochure  
(PDF)

# Accessories



This image is currently unavailable

95592ZUK

Zip HydroTap G4 & G5 Limescale filter kit for work light usage



90915Z00ZUK

Integrated Tap Font Bright Chrome



95276ZUK

135mm tap extension piece Bright Chrome



93867ZUK

Arc Mixer Tap Mains