




Side Elevation
(Ventilation Space)

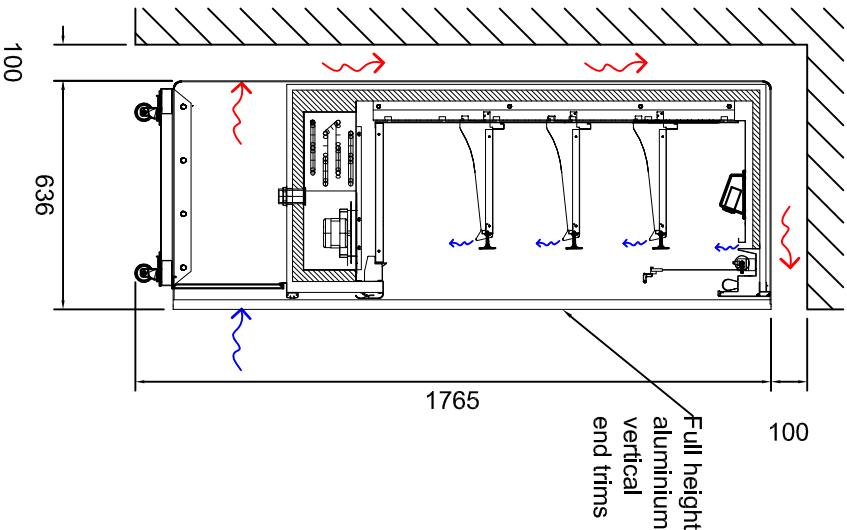

Side Elevation
(Shelving Heights)

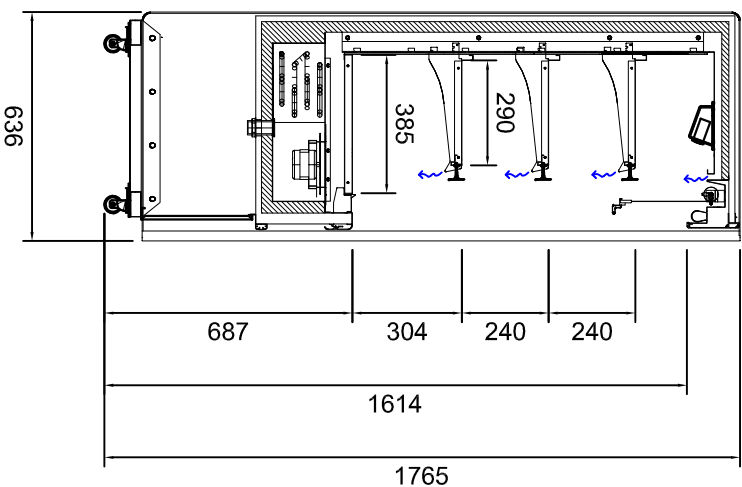

Front Elevation

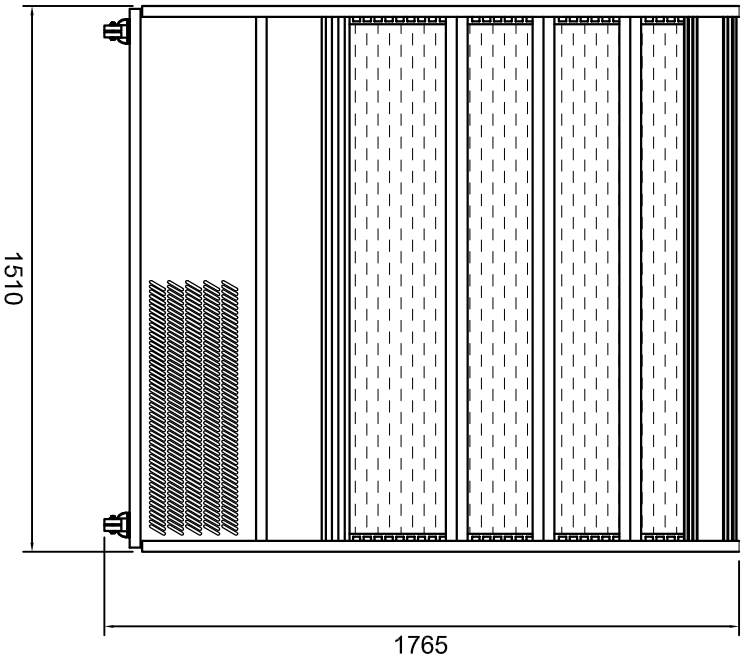

WILLIAMS REFRIGERATION RETAIN COPYRIGHT ON THIS DRAWING.
DO NOT SCALE FROM DRAWING. USE MARKED DIMENSIONS.
WILLIAMS REFRIGERATION ARE TO BE NOTIFIED OF ANY DISCREPANCIES IMMEDIATELY.

Multideck requires a minimum ventilation void of 100mm behind and above unit for heat to escape.

Electrical supply: 1 Phase
13amp UK standard plug top

Multideck Features	
W	White Finish
X	S Mirror Stainless Finish
X	C Castors
F	Feet (For Remote Units Only)
X	N Nightblind
S	Security Shutter
RE	Remote Refrigeration Unit
Only checked features are included	

Multideck Options	
	SH Additional Shelf
	SNB Snack Basket (Hook On)
	TS Tray Slide
	SRD Solid Rear Loading Doors
	GRD Glass Rear Loading Doors
	MT Meat Temperature
	RAL Coloured Finish (RAL)
	AV Alternative Voltage
Only checked options are included	

Maximum operating ambient temperature +25 deg.c,
(climate class 3).

Manufacturing dimensional tolerance +/- 3mm.



Client:

Standard Product

Project:

Standard Product

Title:

R150-SCN R1 - R Series Multideck
Nightblind Model
Mirror Stainless Finish

Drawn By:

PPR

Date:

01/07/17

DWG No:

R150-SCN R1

REV:

A

Williams Refrigeration Southern

F: +44 (0) 1892 835525

Kent, TN12 8BE

T: +44 (0) 1892 835525

F: +44 (0) 1892 835525

E: estimating@williams-southern.co.uk