




The Refrigeration Experts

## Product specification

---

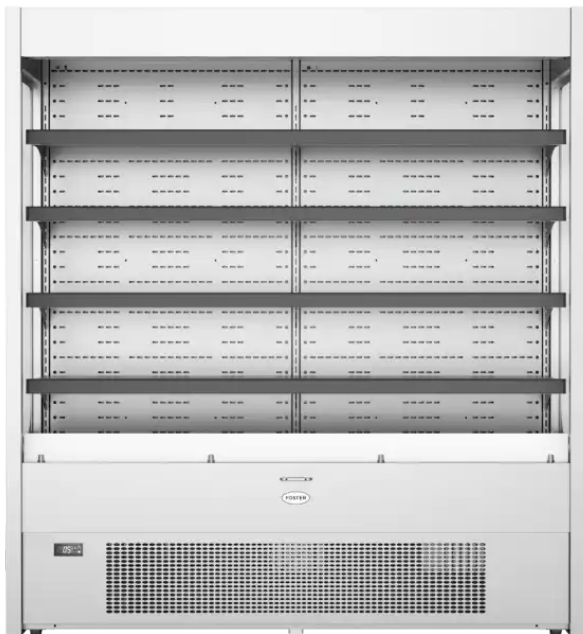

### FMPRO1800NG: 948 Ltr Pro Multideck

19-154

Pro 1800mm multideck with night blind and glass end panels

#### About the product

With huge capacity, high impact display storage, the Pro Multideck is ideal for encouraging impulse purchases whilst requiring less frequent stock replenishment.

Available to finance with our award-winning [interest-free credit](#) and [leasing](#)

Learn more about our [Multideck range](#)

## Why choose this product

- Extra wide glass end panels increase display visibility
- Energy saving retracting 'soft closing mechanism' nightblind
- Removable front cover and slide out condensing unit allows easy access for service, minimising down time
- High impact energy saving LED lighting is brighter, lasts longer and saves money in energy costs
- 2 vertical side mounted full length LED lights last on average 10 x longer than fluorescent lighting and emit a fraction of the heat output
- The Foster Pro Multideck's five display levels maximise capacity and reduce the need for frequent re-stocking
- Additional shelf depth (450mm) delivers increased volume compared to competitor cabinets
- Fully removable shelves and supports for ease of cleaning
- Supplied on roller castors as standard for ease of movement and positioning

## Specification

Technical		Dimensions	
<b>Refrigerant</b>	R290	<b>Height (mm)</b>	1960
<b>Temperature</b>	Display -1/+7°C	<b>Width (mm)</b>	1795
<b>Electrical supply</b>	230/50/1	<b>Depth (mm)</b>	795
<b>Fuse rating (A)</b>	10	<b>Gross volume (ltr)</b>	948
<b>Current (A)</b>	9.2	<b>Net volume (ltr)</b>	613
<b>Power (W)</b>	1900	<b>Leg type</b>	Roller castors
<b>Refrigerant mass (g)</b>	2x150	<b>Gross weight (kg)</b>	311
<b>Thermal heat rejection (W)</b>	1340	<b>Net weight (kg)</b>	295

Build		Energy	
<b>Finish ext/int</b>	304 S/S & 304 S/S	<b>Climate Class</b>	3
<b>Section configuration</b>		<b>Energy grade</b>	E
<b>System</b>	Integral	<b>EEI</b>	63.1
		<b>AEC (kWh)</b>	9366
		<b>GWP</b>	3
		<b>Min - max temperature (°C)</b>	-1/7
		<b>Energy consumption (kWh/24hr)</b>	31.7

#### Footnotes

- Allow 60mm spacer if product is wall-sited (required for air circulation). Spacers are detachable if product is not to be wall-sited
- Performance complies with M2 classification as prescribed in EN23953-2:2005. M2 refers to product temperatures of no greater than +7°C and no lower than -1°C when loaded in accordance with the standard and recorded under test conditions.

Thank you for your interest in this product. We hope you now have everything you need to choose Foster, however if you have any further questions, please do not hesitate to contact us.

Foster Refrigerator, Oldmedow Road, King's Lynn, Norfolk, PE30 4JU  
+44 (0)1553 691122 | sales@foster-gamko.com | [www.fosterrefrigerator.com](http://www.fosterrefrigerator.com)

All images shown are for illustration purpose only. All images and photographs are not intended to be relied upon for, nor to form part of, any contract unless specifically incorporated in writing into the contract. Solely the dimensions and specifications incorporated in the quotation or purchase order confirmation shall be contractually binding.