

Packed Depth cm





F72/200 - IMC VQ3.5 Counter-top Potato Peeler - 1 Phase - W 425 mm - 0.18 kW Compact and flexible, the VQ3.5 peeler has a high output and small footprint, making it ideal for smaller kitchens with single-phase power.

- Able to peel 62.9kg of potatoes per hour, in 3.5kg hatches
- Small footprint and quiet operation, ideal for smaller kitchens
- Compact design for countertops and sink drainers
- Heavy-duty belt and pulley for simple and safe operation
- Self-draining cylinder with smooth profile for easy cleaning
- Long-lasting, rust-proof cast aluminium plate for effective peeling
- Suitable for kitchens with single-phase power supply
- WRAS-compliant Class A air-break and brass spray nozzle to prevent water escape

Arrand IMC Total Power kW 0.18 change V0 Peeler HP 0.24 change 0.24 change 1965 change				
Range VD Peeler HP 0.2.4 Power Type Electric IP Rating IP 55 Unit Type Counter-top Available in UK Only No UK Warranty 2. Years Parts and Labour Warranty Contact your local dealer Pedestal Lopti SOTIN 5058105198857 Capacity Corporator Safety Interlocks Coperator Safety Interlocks Coperator Safety Yes Weights and Dimensions Weights and Dimensions Unit Height (External) mm 425 Requires Installation No Unit Width (External) mm 653 Requires Electrical Supply Yes Unit Width (External) mm 367 UK 3 Pin Plug Yes Unit Weight Kg Meyelpht (External) mm 367 Requires Electrical Supply Yes Unit Weight Kg Mour Rating Watts 180 Single Phase Amps 1.2 Single Phase Amps 1.2 Single Phase Voltage 230 Water Connection 50.8mm Water Connection 12mm Shipping Packed Weight Kg Source Source Packed Weight Kg Source Source Por Connection 12mm Drain Connection 50.8mm Water Connection 12mm	Summary		Power and Performance	
Power Type Unit Type Counter-top Available in UK Only UK Warranty Export Warranty Contact your local dealer Mounting GTIN Soseitosises7 Key Specifications Capacity Coperator Safety Timer Yes Drain Location WRAS Approved Airbreak Yes Unit Height (External) mm Unit Weight (External) mm Unit Weight (External) mm Ounit (Death (External) mm Net Weight Kg Net Weight	Brand	IMC	Total Power kW	0.18
Unit Type Available in UK Only No Available in UK Only KW Warranty Export Warranty Contact your local dealer Mounting Brainer; Worktop: Stand [optional]: Pedestal [opti GTIN 5056105188657 Key Specifications Capacity Operator Safety Timer Yes Drain Location WRAS Approved Airbreak Yes Weights and Dimensions Unit Height (External) mm Unit Width (External) mm 655 Requires Electrical Supply Unit Depth (External) mm 867 Net Weight Kg 87 Net Weight Kg 88 Net Weight Kg 89 Net Weight Kg 80 Net Operator Supply 80 Net Weight Kg 80 Net Weight Kg 80 Net Operator Supply 80 Net Weight Kg 80 Net Weight Kg 80 Net Operator Supply 80 Net Operator Supply 80 Net Operator Supply 80 Net Net Weight Kg 80 Net Operator Supply 80	Range	VQ Peeler	НР	0.24
Available in UK Only UK Warranty 2 Years Parts and Labour Warranty Export Warranty Contact your local dealer Drainer: Worktop: Stand [optional]: Pedestal [opti Fedestal [o	Power Type	Electric	IP Rating	IP55
Export Warranty 2 Years Parts and Labour Warranty	Unit Type	Counter-top		
Export Warranty Mounting Orainer: Worktop: Stand [optional]: Pedestal [opti 5056105198857 Key Specifications Capacity Operator Safety Interlocks Operator Safety Interlocks Operator Safety Variable WRAS Approved Airbreak Ves Weights and Dimensions Wuit Height (External) mm Unit Width (External) mm Sof7 Unit Depth (External) mm Net Weight Kg Ves Weight Kg Again Safe Weight Kg Again Safe Work Safe With Capacity Kg per Hour 62.9 Capacity Kg per Hour 62.9 Capacity Kg per Hour 62.9 Capacity Kg per Hour 62.9 Capacity Kg per Hour 62.9 Capacity Kg per Hour 62.9 Capacity Kg per Hour 62.9 Capacity Kg per Hour 62.9 Capacity Kg per Hour 62.9 Capacity Kg per Hour 62.9 Capacity Kg per Hour 62.9 Capacity Kg per Hour 62.9 Capacity Kg per Hour 62.9 Capacity Kg per Hour 62.9 Capacity Kg per Hour 62.9 Capacity Capacit	Available in UK Only	No		
Mounting Pedestal [opti	UK Warranty	2 Years Parts and Labour Warranty		
Fedestal Copti 5056105198857 Key Specifications Capacity Operator Safety Interlocks Pes Drain Location Variable WRAS Approved Airbreak Ves Unit Height (External) mm Unit Width (External) mm Softy Net Weight Kg 28 Requires Installation Requires Electrical Supply Yes Unit Depth (External) mm Softy Notor Rating Watts Single Phase Amps 1.2 Single Phase Amps 1.2 Single Phase Voltage Water Connection Shipping Shipping Packed Weight Kg 30.5	Export Warranty	Contact your local dealer		
Pedestal opti 5056105198857	Mounting	Drainer; Worktop; Stand[optional];		
Key Specifications Capacity Operator Safety Timer Yes Drain Location Variable WRAS Approved Airbreak Yes Weights and Dimensions Unit Height (External) mm 425 Unit Depth (External) mm 367 Net Weight Kg Net Weight Kg Net Weight Kg Requires Electrical Supply Yes UK 3 Pin Plug Yes Requires Hardwiring No Motor Rating Watts 180 Single Phase Voltage 230 Water Connection Pressure Bar Drain Connection 12mm Water Connection 12mm Shipping Packed Weight Kg Operator Safety Capacity Kg per Hour 62.9 Supply Connections No No No Requires Installation No No No Motor Rating Watts Single Phase Voltage Water Connection Pressure Bar Drain Connection Foo.8mm Water Connection 12mm Shipping Packed Weight Kg Solution Shipping Packed Weight Kg Solution Soluti	wounting	Pedestal [opti		
Operator Safety Timer Yes Drain Location Variable WRAS Approved Yes Airbreak Yes Weights and Dimensions Unit Height (External) mm 425 Requires Installation No Unit Width (External) mm 653 Requires Electrical Supply Yes Unit Depth (External) mm 387 UX 3 Pin Plug Yes Net Weight Kg 28 Requires Hardwiring No Motor Rating Watts 180 Single Phase Amps 1.2 Single Phase Voltage 230 Water Connection Pressure Bar 2.7-3.8 [40-55 psi] Drain Connection 12mm Shipping Packed Weight Kg 30.5	GTIN	5056105198857		
Timer Yes Drain Location Variable WRAS Approved Yes Airbreak Yes Weights and Dimensions Unit Height (External) mm 425 Requires Installation No Unit Width (External) mm 653 Requires Electrical Supply Yes Unit Depth (External) mm 367 UK 3 Pin Plug Yes Net Weight Kg 28 Requires Hardwiring No Motor Rating Watts Single Phase Amps 1.2 Single Phase Voltage 230 Water Connection Pressure Bar 2.7-3.8 [40-55 psi] Drain Connection 90.8mm Water Connection 12mm Shipping Packed Weight Kg 30.5	Key Specifications		Capacity	
Drain Location WRAS Approved Airbreak Weights and Dimensions Weights and Dimensions Unit Height (External) mm Unit Width (External) mm Unit Depth (External) mm Set Weight Kg Weight Kg Weight Kg Weight (External) mm Weight (External) mm Weight (External) mm Weight (External) mm Weight Kg	Operator Safety	Interlocks	Capacity Kg per Hour	62.9
WRAS Approved Airbreak Weights and Dimensions Unit Height (External) mm Unit Width (External) mm Unit Depth (External) mm Net Weight Kg 28 Requires Electrical Supply Yes Requires Hardwiring Motor Rating Watts Single Phase Amps 1.2 Single Phase Voltage Water Connection Pressure Bar Drain Connection Water Connection Draim Connection Water Connection	Timer	Yes		
Airbreak Yes Weights and Dimensions Unit Height (External) mm 425 Unit Width (External) mm 653 Unit Unit Depth (External) mm 367 Net Weight Kg 28 Requires Electrical Supply Yes UK 3 Pin Plug Yes Requires Hardwiring No Motor Rating Watts 180 Single Phase Amps 1.2 Single Phase Voltage 230 Water Connection Pressure Bar 2.7-3.8 [40-55 psi] Drain Connection 50.8mm Water Connection 12mm Shipping Packed Weight Kg 30.5	Drain Location	Variable		
Weights and Dimensions Unit Height (External) mm 425 Unit Width (External) mm 853 Unit Depth (External) mm 367 Net Weight Kg 28 Requires Electrical Supply Yes No Motor Rating Watts Single Phase Amps 1.2 Single Phase Voltage Water Connection Pressure Bar Drain Connection Water Connection 12mm Shipping Packed Weight Kg 30.5	WRAS Approved	Yes		
Unit Height (External) mm 425 Unit Width (External) mm 653 Requires Electrical Supply Yes Unit Depth (External) mm 367 UK 3 Pin Plug Yes Net Weight Kg 28 Requires Hardwiring No Motor Rating Watts 180 Single Phase Amps 1.2 Single Phase Voltage 230 Water Connection Pressure Bar 2.7-3.8[40-55 psi] Drain Connection Water Connection 12mm Shipping Packed Weight Kg 30.5	Airbreak	Yes		
Unit Width (External) mm 10	Weights and Dimensions		Supply Connections	
Unit Depth (External) mm Net Weight Kg 28 Requires Hardwiring Motor Rating Watts Single Phase Amps 1.2 Single Phase Voltage Water Connection Pressure Bar Drain Connection Water Connection 12mm Shipping Packed Weight Kg 30.5	Unit Height (External) mm	425	Requires Installation	No
Net Weight Kg 28 Requires Hardwiring Motor Rating Watts Single Phase Amps 1.2 Single Phase Voltage Water Connection Pressure Bar Drain Connection Water Connection 12mm Shipping Packed Weight Kg 30.5	Unit Width (External) mm	653	Requires Electrical Supply	Yes
Motor Rating Watts Single Phase Amps 1.2 Single Phase Voltage 230 Water Connection Pressure Bar Drain Connection Water Connection 12mm Shipping Packed Weight Kg 30.5	Unit Depth (External) mm	367	UK 3 Pin Plug	Yes
Single Phase Amps Single Phase Voltage 230 Water Connection Pressure Bar Drain Connection Water Connection 12mm Shipping Packed Weight Kg 30.5	Net Weight Kg	28	Requires Hardwiring	No
Single Phase Voltage Water Connection Pressure Bar Drain Connection Water Connection Water Connection 12mm Shipping Packed Weight Kg 30.5			Motor Rating Watts	180
Water Connection Pressure Bar Drain Connection Water Connection Water Connection 12mm Shipping Packed Weight Kg 30.5			Single Phase Amps	1.2
Drain Connection 50.8mm 12mm Shipping Packed Weight Kg 30.5			Single Phase Voltage	230
Drain Connection 50.8mm Water Connection 12mm Shipping Packed Weight Kg 30.5			Water Connection Pressure Bar	2.7-3.8[40-55 psi]
Shipping Packed Weight Kg 30.5			Drain Connection	
Packed Weight Kg 30.5			Water Connection	12mm
Packed Weight Kg 30.5	Chinning			
	Snipping			
Packed Height cm 56	Packed Weight Kg	30.5		
	Packed Height cm	56		





Available Accessories

A29/003 Lid Retaining Strap for SP/VQ Potato Peeler


E72/011 Sink Skip - Stainless Steel - for MF10/MF15L/MF15L/VQ Peeler


\$72/023 Waste Ejector for SP/VQ Potato Peeler [2" BSP]


\$72/220 Trolley for VQ Potato Peeler [H 890 mm]

\$72/221 Pedestal for VQ Potato Peeler [H 750/800/850/900/950 mm - adjustable]

Technical Picture





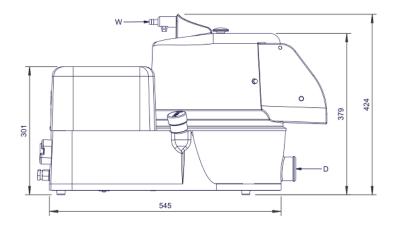







Lincat Limited

Whisby Road,

Lincoln, LN6 3QZ,

United Kingdom

Company No: 2175448

A member company of

Customer Care

Tel: +44 1522 875500

Email: care@lincat.co.uk

Export Customers

Tel: +44 1522 503250

Email: export@lincat.co.uk

Opening Hours

Monday - Friday:

8.30am - 5pm