

Hydro H857A Dishwasher



Overview

Classeq was founded in 1977 and became a fully owned subsidiary of Winterhalter in March 2004. Classeq is manufactured in the United Kingdom at our factory in Hixon.

Features

- 1 ½ & 3 minute wash cycle
- 500mm x 500mm basket
- Simple two touch control panel operation
- High volume Dishwasher
- Optional chemical dispensers
- Optional Integral Water Softener
- Drain Pump
- Integral Approved Air Gap - WRC
- Built in Rinse Booster Pump
- Triple Action Automatic Self Drain & Clean Down Programme
- Continuous Hood Clean System
- Single piece wash arms provide highly effective wash action
- Removable basket guides
- Heavy duty easy to use controls
- Primary and secondary protective filter system
- 30 amp single phase or 16 amp three phase



Benefits


- Easy to operate
- Easy to Clean
- Eco friendly
- Integral Softener ensures continuous washing cycles between salt replenishment
- Accurate, automatic and safe dosing of chemicals
- Secondary protective filter system ensures cleaner water for longer periods which reduces water and chemical consumption
- Continuous Hood Clean System ensures the interior of the hood is hygienically clean at all times

Accessories

- External Water Softener
- Salt (Granulated)
- Additional baskets
- Super Clean Dishwashing Detergent
- Super Clean Dishwashing Rinse Aid



Hydro H857A Dishwasher

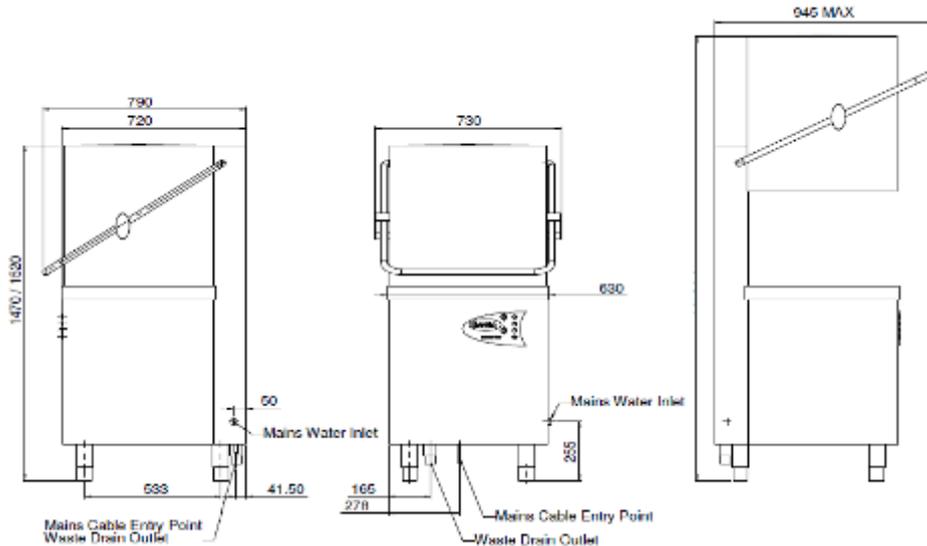

Dimensions

• Width	630 mm
• Depth	720 mm
• Height – hood closed	1470 - 1520 mm
• Height – hood open	1890 - 1940 mm
• Maximum clear entry height	385 mm

Water Connection & Drainage

• Hot water mains potable supply	¾ BSP Isolator
• Water Supply Temperature	60 C maximum
• Water Inlet from floor level	265 – 315 mm
• Water Pressure	Min 2.0 / Max 6.0 Bar
• Required Water Flow	8 litres/minute
• Drain Type	Pumped
• Drain Size	40 mm

Electrical Connection

• Operating Voltage	220/50/1 Optional
• Operating Voltage	400/5/3 Standard
• Total Connected Load	6.84 kW
• Amps required – 1 phase	30 Amps
• Amps required – 3 phase	13 Amps

Performance

• Wash Tank Heating	4.05 kW
• Rinse Boiler Heating	6.0 kW
• Wash Pump Size	0.74 kW
• Wash Pump Capacity	380 litres/minute
• Wash Tank Capacity	39 litres
• Wash Tank Operating Temperature	55 C
• Rinse Boiler capacity	7.5 litres
• Rinse Boiler Operating Temperature	80 C
• Rinse water Consumption (@2 Bar)	3.25 litres
• Maximum Stand Pipe Height from floor	700 mm

Weight

• Packed	140 kg
• Unpacked	130 kg

Classeq, Roebuck Way, Knowlhill, Milton Keynes, MK5 8WH.
 Telephone: 00 44 (0) 844 225 9250 Fax: 00 44 (0)844 225 9251
 Email: sales@classeq.co.uk www.classeq.co.uk



Part of the Winterhalter
group of companies