



HT3/P - Lincat Silverlink 600 Propane Gas Counter-top Boiling Top - 2 Burners - W 300 mm - 9.0 kW

Designed to fit in with other Silverlink 600 products, whether you're cooking in a care home, cafe, or smaller pub or restaurant, the Gas Boiling Top won't let you down.

- ✔ Powerful gas burners with flame failure device for added safety
- ✔ Robust, easy-to-clean vitreous enamelled cast iron pan supports
- ✔ Fully pressed and sealed hob tops for easy cleaning
- ✔ Low level flue maximises working area and enables you to use large stock pots

Specifications

Summary

| | |
|-----------------------------|-----------------------------------|
| Brand | Lincat |
| Range | Silverlink 600 |
| Power Type | Gas |
| Gas Type | Propane Gas |
| Unit Type | Counter-top |
| Available in UK Only | No |
| UK Warranty | 2 Years Parts and Labour Warranty |
| Export Warranty | Contact your local dealer |
| GTIN | 5056105105015 |

Power and Performance

| | |
|----------------------------|------------|
| BTU per Hour | 30,708 |
| Total Power kW | 9.0 |
| Temperature Control | Mechanical |
| Rating per Hob kW | 2 x 4.5 |

Key Specifications

| | |
|-----------------------|-------|
| Number of Hobs | 2 |
| Shape of Hob | Round |

Weights and Dimensions

| | |
|----------------------------------|---------|
| Unit Height (External) mm | 306 |
| Unit Width (External) mm | 300 |
| Unit Depth (External) mm | 626 |
| Hob Dimensions mm | 150-400 |
| Net Weight Kg | 11.9 |

Supply Connections

| | |
|--|--------|
| Requires Installation | Yes |
| Requires Electrical Supply | No |
| Gas Connection BSP | 1/2" |
| Gas Consumption at full rate Propane m³ per Hour | 0.64 |
| Gas Pressure Propane mbar | 37 |
| Total heat input at full rate Propane kW | 9.0 |
| Total heat input at full rate Propane BTU per hour | 30,709 |




Shipping

| | |
|-------------------------|------|
| Packed Weight Kg | 14.9 |
| Packed Height cm | 49.5 |
| Packed Width cm | 70 |
| Packed Depth cm | 40 |

Available Accessories

| | |
|-------------|--|
| CH01 | Caterflex Hose 1/2" - 1 Metre - for use with units up to 66,000 BTU |
| CH02 | Caterflex Hose 1/2" - 1.5 Metre - for use with units up to 56,000 BTU |
| CN3 | Lincat Silverlink 600 Free-standing Ambient Open-Top Pedestal without Doors - W 300 mm |
| SLS3 | Lincat Silverlink 600 Free-standing Floor Stand - for units W 300 mm |

Technical Picture

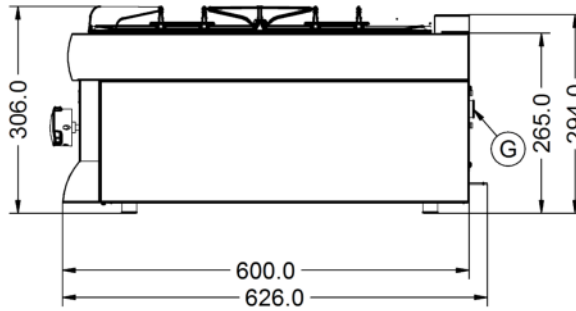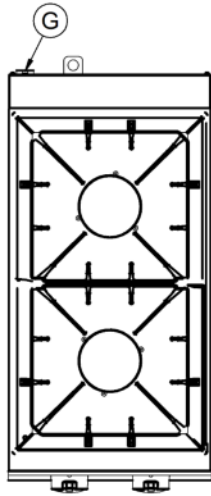

Lincat Limited

Whisby Road,
Lincoln, LN6 3QZ,
United Kingdom

Company No: 2175448

A member company of



Customer Care

Tel: +44 1522 875500
Email: care@lincat.co.uk

Export Customers

Tel: +44 1522 503250
Email: export@lincat.co.uk

Opening Hours

Monday – Friday:
8.30am – 5pm