

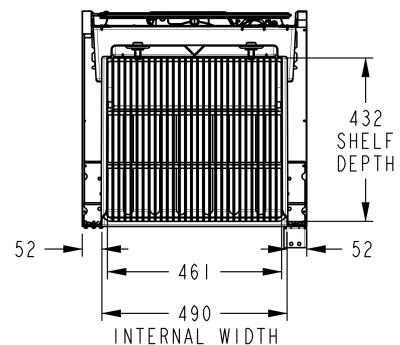




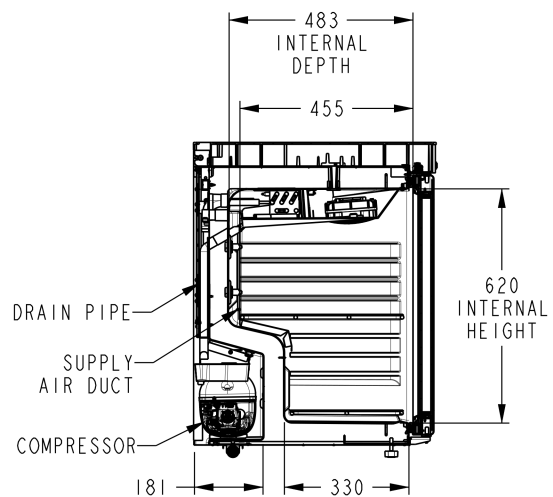


WITHOUT DOOR

SECTION Z-Z
SCALE 0.050

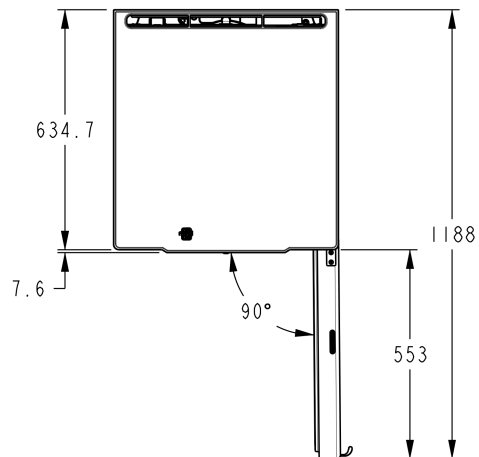

SECTION XX-XX

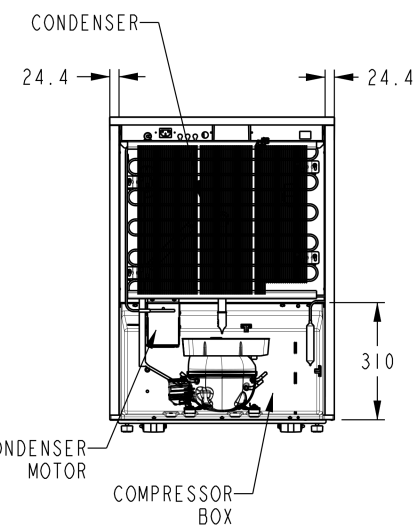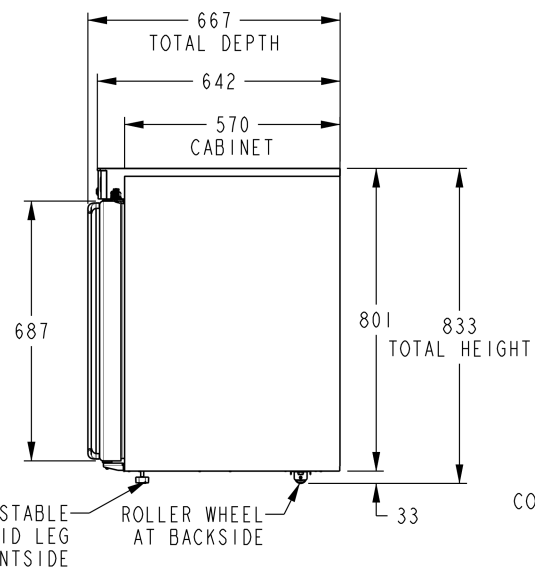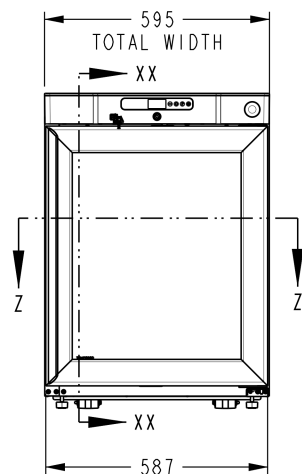

	I	2	3	4	5	6	7	8
A	ITEM	UPRIGHT GLASS DOOR						
	MODEL NAME	COMPACT FG220						
	POWER SUPPLY	SINGLE PHASE, 220-240V AC, 50HZ						
	POWER CORD	3M / AMPERAGE AS PER COUNTRY SPECIFICATION						
	OUTSIDE DIMENSIONS (mm)	595(W)X667(D)X833(H-WITH ROLLER)						
	INSIDE DIMENSIONS (mm)	490(W)X483(D)X620(H)						
	EXTERIOR MATERIAL	PRE-COATED SHEET / STAINLESS STEEL SS430						
	INTERIOR MATERIAL	HIPS						
B	INSULATION	POLYURETHANE FOAM (CFC FREE)						
	INSULATION FOAM BLOWING AGENT	CYCLOPENTANE						
	REFRIGERATION SYSTEM	FORCED COOLING						
	COMPRESSOR	EMBRACO						
	CONDENSER	WIRE ON TUBE TYPE						
	EVAPORATOR	COPPER TUBE						
	REFRIGERANT	R600a						
	OPERATING CONDITIONS	CLIMATIC CLASS 3 : +25°C / 60% RH						
C	TEMPERATURE RANGE	-19°C TO -5°C						
	CASTOR / LEGS / QUANTITY	2NOS OF ROLLER WHEELS AND 2NOS OF ANTI-SKID LEGS						
	SHELF	1NO BIG SHELF + 1NO SMALL SHELF						
D								
E								
F								
	I	2	3	4	5	6	7	8