



Intuitive control, great freedom


Smart and essential, the 5" touch screen, placed at your fingertips and at eye level on the door of the blast chiller, offers immediate visibility and interaction with the functions, represented by intuitive and easy-to-read symbols



Model: **RBS-122-SA-R290**

Ready

BLAST CHILLER FOR SMALL TO MEDIUM CATERING, AND BAKING SECTOR. SUPER VERSION. TRAY CAPACITY 24 x GN 1/1 - 24 x EN1 (600 x 400). AIR CONDENSING UNIT.

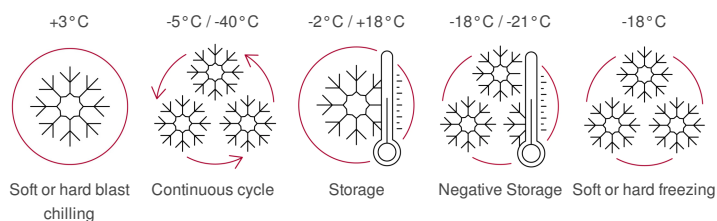

CE CB

HOW TO USE

- POSITIVE BLAST CHILLING +90 / +3°C AT THE SOFT AND HARD CORE
- +3°C STORAGE AT THE END OF THE CYCLE
- FAST SOFT AND HARD CORE FREEZING +90 / -18°C
- -18°C STORAGE AT THE END OF THE CYCLE
- AUTOMATIC FISH SANITIZING CYCLE
- AUTOMATIC ICE CREAM HARDENING CYCLE

CONTROL MECHANISMS

- 5" touch screen color display with control interface
- Connectivity available on request
- Quick-release heated core probe with 4 measuring points
- Processes identifiable by pictograms and text
- Bluetooth connection enabled via free app to monitor and download HACCP data (optional)
- Alarm viewing.
- Internal fan stop by micro switch when door is opened.
- Customizable programs for your own recipes

STRUCTURAL CHARACTERISTICS

- External Scotch Brite satin finish stainless steel
- High density CFC and HCFC-free PU insulation (42 kg/m3).
- Highly ventilated evaporator to ensure the cooling system's maximum efficiency
- Stainless steel internal coating with fully rounded corners
- Die-moulded and leakproof internal base.
- Magnetic seal on 4 sides of the door
- Indirect-flow electric fans - made of composite material - on the product
- Side guide-supporting uprights with 18 mm-pitch holes
- Compressor-protecting automatic-reset thermal circuit breaker
- Copper-aluminium evaporating coil, cataphoresis-painted
- Copper condensing coil with aluminum fins with high thermal efficiency.
- Full-length flush ergonomic handle
- Anti-condensation heating element situated on the body frame, under the stop
- Double-pitch (GN-EN) stainless steel slides, removable and equipped with anti-tip system
- Slide for etagere insertion
- Insulation thickness: 60 mm.
- Heating door frame

CLEANING AND MAINTENANCE

- Easy to wash and hygienic safety due to the suspended evaporator coil.
- Easy to clean in accordance with UNI EN 14159 hygiene regulations.

CONDENSING UNITS

- Provision for other types of refrigerant gas on request
- Automatic defrost and defrost water self evaporating.

VERSIONS AVAILABLE

- Model with wheels
- Model with left hinged door

STANDARD EQUIPMENT

- Unequipped removable grill-holding panels in AISI 304 18/10 stainless steel, with double "L"-shaped guides
- USB connection for uploads and downloads
- Quick-release heated core probe with 4 measuring points

OPTIONAL TO BE REQUESTED WHEN ORDERING

- CA-122: Wooden crate packaging
- PSX-122: Left hinged door
- ICEK-122: Ice cream kit - 5 slides couples + 5 GN 2/1 grids
- SKRT-03: Castor kit, 2 with brake
- MK122F: Marine version kit - Food zone full AISI 304, flanged feet, anti-tip rack rails

EXTRA ACCESSORIES THAT CAN BE INSTALLED FOLLOWING PURCHASE

- TS-122-208-3-60Hz-SO: 3-AC 208/230 V - 60 Hz
- TS-122-360-3N-60Hz-SO: 3N-AC 360/400 V - 60 Hz

Capacity

Capacity	24 x GN 1/1 24 x EN1 (600 x 400)		
Distance between layers	mm	75	inch 3.0
No. of layers - h 20	44		
Distance between layers - h 20	mm	37.5	inch 1.5
No. of layers - h 40	28		
Distance between layers - h 40	mm	56.25	inch 2.2
No. of layers - h 65	22		
Distance between layers - h 65	mm	75	inch 3.0
Minimum layers distance	mm	18.75	inch 0.7

Dimensions

Width	mm	1100	inch 43.3
Depth	mm	1080	inch 42.5
Height	mm	1860	inch 73.2
Packaging width	mm	1140	inch 44.9
Packing depth	mm	1180	inch 46.5
Packaging height	mm	2010	inch 79.1
Net weight	kg	255	lbs 562.3
Gross weight	kg	295	lbs 650.5
Volume	m3	2.21	ft3 78.0
Packing volume	m3	2.7	ft3 95.4
Useful Inner Width	mm	670	inch 26.4
Inner depth	mm	930	inch 36.6
PU insulation - Thickness	mm	60	inch 2.4

Technical Data

Working temperature	°C	+3 / -40 °C	°F	NaN
Motor	On board			
Cooling mode	Air			
PU insulation - Thickness	mm	60	inch	2.4
Climate class	5			
GWP - Global Warming Potential	2141			
Refrigerant - Type	R290			
Refrigerant - Quantity	g	2x250	oz	NaN

Power supply

Power supply voltage	3N-AC 400 V			
Electrical absorption	A	8,1		
Frequency	Hz	50		
Total electric power	kW	3,299		
Cooling power *	kW	2,690		

Blast chilling

Blast Chilling Capacity in 90' +90 / +3 °C	kg	80	lbs	176.4
Freezing Capacity in 240' +90 / -18 °C	kg	60	lbs	132.3
Blast Chilling Capacity in 120' +65 / +10 °C - BC standard ISO 22042	kg	80	lbs	176.4
Freezing Capacity in 270' +65 / -18 °C - BF standard ISO 22042	kg	55	lbs	121.3
Blast Chilling cycle time - BC standard ISO 22042	min	109		
Freezing cycle time - BF standard ISO 22042	min	255		
Blast Chilling energy consumed - BC standard ISO 22042	kW h / kg	0,064		
Freezing cycle energy consumed - BF standard ISO 22042	kW h / kg	0,228		

Water Connection

Discharge - ø	mm	1/2"	inch	NaN
---------------	----	------	------	-----

Emissions

Noisiness	db	< 70		
-----------	----	------	--	--

* BT - Evap. temp. -25°C / Cond. temp. +45°C

