



GENERAL PURPOSE OVEN RANGES



E3101D Three Hotplate Range

MODELS and ACCESSORIES

E3101D 3HP - Three hotplate range - general purpose oven

E3101D 4HP - Four hotplate range - general purpose oven

E3161D 3HP - Three hotplate range - general purpose oven

- Fully integrated extended flue
- Splashplate and plateshelf
- Oven shelf
- Factory fitted, adjustable castors
- Fixed installation kit
- Suiting kit

KEY FEATURES

- Drop-down door with 90° position hinge
 - *quick access to load and unload oven*
- Full depth heavy duty cast iron hotplates
 - *Allow multiple cooking positions*
- Three and four hotplate models available
 - *Provides versatility for varied menus*
- Fast-acting circular hotplates
 - *Reduces heat up times, energy efficient*
- Full width, removable drip tray
 - *Retains spillages and keeps unit clean*
- Vitreous enamelled oven chamber
 - *Easy to clean and to keep clean*
- Wide oven temperature range of 100 - 250°C
 - *Ideal to prepare a wide variety of food*
- Oven has 5 shelf positions to allow 2 shelf cooking
 - *Versatile, ideal for a wide range of menu items*
- Low profile door handle
 - *Reduces intrusion into work space*
- Laser-etched control icons
 - *Permanent, indelible markings*

INSTALLATION NOTES

Adequate ventilation must be provided to supply sufficient fresh air and to allow easy removal of any such products that may present a risk to health. Please consult current legislation for details that relate to specific locations.

Install unit on a level, fireproof surface in a well-lit position. If floor is made of a combustible material, local fire requirements must be checked to ensure compliance.

A clearance of 150mm should be observed between appliance and any combustible wall.






DOMINATOR PLUS

GENERAL PURPOSE OVEN RANGES

MODEL DIMENSIONS (in mm)

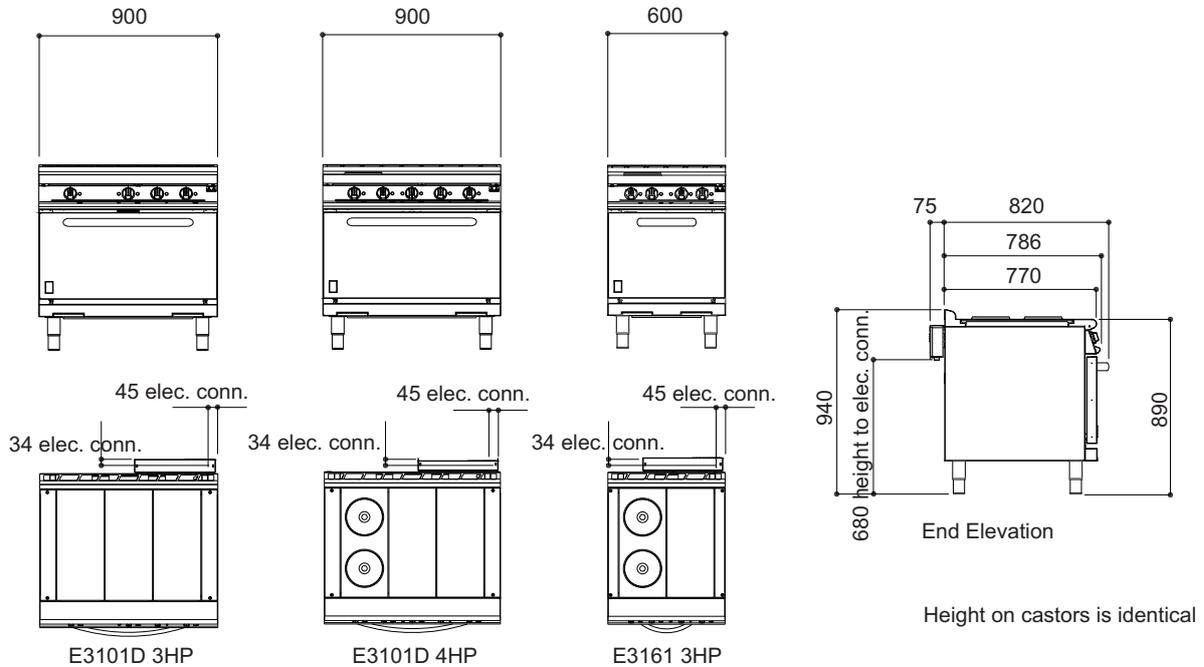

SPECIFICATION DETAILS

	E3101D 3HP	E3101D 4HP	E3161 3HP
Electrical rating (kW)	14.7	15	11.5
Electrical supply voltage	400V 3N~ / 230V~	400V 3N~ / 230V~	400V 3N~ / 230V~
Minimum electrical supply 230V ~ (amps)	100	100	100
Minimum electrical supply 400V 3N~ (amps)	32	32	32
Electrical current split (amps)	L1: 14 / L2: 28 / L3: 22	L1: 22 / L2: 22 / L3: 22	L1: 16 / L2: 14 / L3: 20
Hotplate rating (kW)	3.2 x 3	3.2 x 2 / 1.8 x 2	3.2 x 1 / 1.8 x 2
Total oven element rating (kW)	5.1	5.1	4.6
Oven dimensions (w x d x h - mm)	700 x 535 x 430	700 x 535 x 430	400 x 535 x 430
Oven shelf (w x d - mm)	700 x 535	700 x 535	400 x 535
Gastronorm compatibility	2/1	2/1	1/1
Weight (kg)	154	155	144
Packed weight (kg)	167	168	154