

Intuitive control, great freedom


Smart and essential, the 5" touch screen, placed at your fingertips and at eye level on the door of the blast chiller, offers immediate visibility and interaction with the functions, represented by intuitive and easy-to-read symbols



Model: RBS-081-SA-R290

Ready

BLAST CHILLER FOR SMALL TO MEDIUM CATERING, AND BAKING SECTOR. SUPER VERSION. TRAY CAPACITY 8 x GN 1/1 - 8 x EN1 (600 x 400). AIR CONDENSING UNIT - GAS R290.

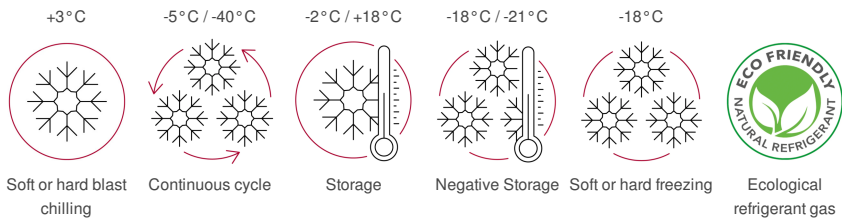

CE CB

HOW TO USE

- POSITIVE BLAST CHILLING +90 / +3°C AT THE SOFT AND HARD CORE
- +3°C STORAGE AT THE END OF THE CYCLE
- FAST SOFT AND HARD CORE FREEZING +90 / -18°C
- -18°C STORAGE AT THE END OF THE CYCLE
- AUTOMATIC FISH SANITIZING CYCLE
- AUTOMATIC ICE CREAM HARDENING CYCLE

CONTROL MECHANISMS

- 5" touch screen color display with control interface
- Connectivity available on request
- Quick-release heated core probe with 4 measuring points
- Processes identifiable by pictograms and text
- Bluetooth connection enabled via free app to monitor and download HACCP data (optional)
- Alarm viewing.
- Internal fan stop by micro switch when door is opened.
- Customizable programs for your own recipes

STRUCTURAL CHARACTERISTICS

- External Scotch Brite satin finish stainless steel
- High density CFC and HCFC-free PU insulation (42 kg/m3).
- Highly ventilated evaporator to ensure the cooling system's maximum efficiency
- Stainless steel internal coating with fully rounded corners
- Die-moulded and leakproof internal base.
- Magnetic seal on 4 sides of the door
- Indirect-flow electric fans - made of composite material - on the product
- Side guide-supporting uprights with 18 mm-pitch holes
- Compressor-protecting automatic-reset thermal circuit breaker
- Copper-aluminium evaporating coil, cataphoresis-painted
- Copper condensing coil with aluminum fins with high thermal efficiency.
- Full-length flush ergonomic handle
- Anti-condensation heating element situated on the body frame, under the stop
- Double-pitch (GN-EN) stainless steel slides, removable and equipped with anti-tip system
- Slide for etagere insertion
- Insulation thickness: 60 mm.
- Heating door frame

CLEANING AND MAINTENANCE

- Easy to wash and hygienic safety due to the suspended evaporator coil.
- Easy to clean in accordance with UNI EN 14159 hygiene regulations.

CONDENSING UNITS

- Provision for other types of refrigerant gas on request
- Automatic defrost and defrost water self evaporating.
- R290 ecological refrigerant gas

VERSIONS AVAILABLE

- Model with wheels
- Model with left hinged door

STANDARD EQUIPMENT

- Unequipped removable grill-holding panels in AISI 304 18/10 stainless steel, with double "L"-shaped guides
- Quick-release heated core probe with 4 measuring points
- USB connection for uploads and downloads

OPTIONAL TO BE REQUESTED WHEN ORDERING

- PSX-091: Left hinged door
- CA-081: Wooden crate packaging
- ICEK-081: Ice cream kit - 4 slides couples + 4 GN 1/1 grids
- MK081F: Marine version kit - Food zone full AISI 304, flanged feet, anti-tip rack rails
- SKRT-02: Castor kit, 2 with brake

EXTRA ACCESSORIES THAT CAN BE INSTALLED FOLLOWING PURCHASE

- TS-091-208-1N-60Hz-SO: 1N-AC 208/230 V - 60 Hz

Capacity

Capacity	8 x GN 1/1 8 x EN1 (600 x 400)		
Distance between layers	mm	73	inch 2.9
No. of layers - h 20	18		
Distance between layers - h 20	mm	36.5	inch 1.4
No. of layers - h 40	12		
Distance between layers - h 40	mm	54.75	inch 2.2
No. of layers - h 65	9		
Distance between layers - h 65	mm	73	inch 2.9
Minimum layers distance	mm	18.25	inch 0.7

Dimensions

Width	mm	790	inch 31.1
Depth	mm	870	inch 34.3
Height	mm	1460	inch 57.5
Packaging width	mm	830	inch 32.7
Packing depth	mm	970	inch 38.2
Packaging height	mm	1610	inch 63.4
Net weight	kg	150	lbs 330.8
Gross weight	kg	190	lbs 418.9
Volume	m3	1	ft3 35.3
Packing volume	m3	1.3	ft3 45.9
Useful Inner Width	mm	670	inch 26.4
Inner depth	mm	450	inch 17.7
PU insulation - Thickness	mm	60	inch 2.4

Technical Data

Working temperature	°C	+3 / -40 °C	°F	NaN
Motor	On board			
Cooling mode	Air			
PU insulation - Thickness	mm	60	inch	2.4
Climate class	5			
GWP - Global Warming Potential	3			
Refrigerant - Type	R290			
Refrigerant - Quantity	g	200	oz	7.05

Power supply

Power supply voltage	1N-AC 230 V			
Electrical absorption	A	9,56		
Frequency	Hz	50		
Total electric power	kW	1.606		
Cooling power *	kW	1,345		

Blast chilling

Blast Chilling Capacity in 90' +90 / +3 °C	kg	40	lbs	88.2
Freezing Capacity in 240' +90 / -18 °C	kg	25	lbs	55.1
Blast Chilling Capacity in 120' +65 / +10 °C - BC standard ISO 22042	kg	35	lbs	77.2
Freezing Capacity in 270' +65 / -18 °C - BF standard ISO 22042	kg	20	lbs	44.1
Blast Chilling cycle time - BC standard ISO 22042	min	95		
Freezing cycle time - BF standard ISO 22042	min	266		
Blast Chilling energy consumed - BC standard ISO 22042	kW h / kg	0,069		
Freezing cycle energy consumed - BF standard ISO 22042	kW h / kg	0,219		

Water Connection

Discharge - ø	mm	1/2"	inch	NaN
---------------	----	------	------	-----

Emissions

Noisiness	db	< 70		
-----------	----	------	--	--

* BT - Evap. temp. -25°C / Cond. temp. +45°C

