




51 XLE

| XLE |

OPTIMAL LOW
ENERGY SOLUTION

FEATURES

- Environmentally friendly
- Low service costs
- Long life
- Available in all climate classes
- 100 mm insulation
- Accessories including baskets - see page 70

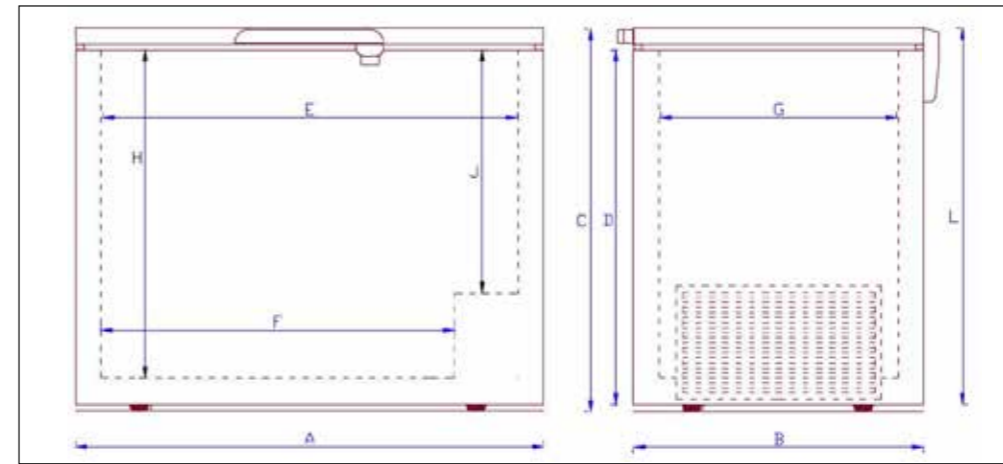

100 MM INSULATION



11 XLE



21 XLE



31 XLE



41 XLE

	11 XLE	21 XLE	31 XLE	41 XLE	51 XLE
Ambient temperature (Celsius)	+10 to +30	+10 to +30	+10 to +30	+10 to +30	+10 to +30
Gross volume, litres	130	226	300	360	416
Net volume, litres	130	226	300	360	416
Temperature range inside unit	-14 to -22	-14 to -22	-14 to -22	-14 to -22	-14 to -22
Refrigerant: R600	Yes	Yes	Yes	Yes	Yes
Input power (watt):	210	360	360	400	420
Energy consumption / 24 h (kwh) at 25 degree amb.	0,43	0,55	0,64	0,72	0,81
DIMENSIONS					
External dimensions (wxdxh)	725*655*865	1055*655*865	1300*655*865	1500*655*865	1700*655*865
Internal dimensions (wxdxh)	520x450x650	850x450x650	1100x450x650	1300x450x650	1500x450x650
Dimension A	725	1055	1305	1505	1705
Dimension B	655	655	655	655	655
Dimension B incl handle & hinges	730	730	730	730	730
Dimension C	865	865	865	865	865
Dimension D	780	780	780	780	780
Dimension E	520	850	1100	1300	1500
Dimension F	320	650	900	1100	1300
Dimension G	450	450	450	450	450
Dimension H	650	650	650	650	650
Dimension J	400	400	400	400	400
Dimension L	850	850	850	850	850
Insulation ,mm	100	100	100	100	100
ACCESSORIES					
Dividers	Optional	Optional	Optional	Optional	Optional
Number of baskets included	1	2	3	4	4
Castors	Optional	Optional	Optional	Optional	Optional
Castors w. brakes	Optional	Optional	Optional	Optional	Optional
Freezing capacity kg /24 h	16	25	31	34	36
Calendar in lid	Included	Included	Included	Included	Included
Light in lid	Included	Included	Included	Included	Included
Lock	Included	Included	Included	Included	Included
OTHER DATA					
Outer cabinet	White	White	White	White	White
Inner cabinet	Aluminium	Aluminium	Aluminium	Aluminium	Aluminium
Type of cooling	Static	Static	Static	Static	Static
Type of defrost	Manual	Manual	Manual	Manual	Manual
Power	220V/50Hz	220V/50Hz	220V/50Hz	220V/50Hz	220V/50Hz
Power 110volt / 60 hz	Optional	Optional	Optional	Optional	Optional
Thermostat	Mechanical	Mechanical	Mechanical	Mechanical	Mechanical
Net weight, kg	43	54	64	67	77
Gross weight, kg	46	58	68	71	82
SHIPPING					
20' cont. Capacity	42	30	24	20	18
40' cont. Capacity	90	64	50	46	40
40' HC cont. Capacity	126	88	70	61	52
Standard Trailer capacity	102	74	60	52	44