

CP4

450mm Single Pan Gas Pasta Cooker



CP4

- High performance single pan pasta cooker
- Patented infra-red burner system
- Easy clean 316 grade stainless steel open pan
- 40L water capacity
- Integrated water fill and starch skimming water faucet
- Six stainless steel pasta baskets supplied
- Hinged basket drain stand
- Safety cut-out thermostat for empty pan/water boil out
- Stainless steel exterior
- Easy clean
- Easy service
- Fully modular

OVERALL CONSTRUCTION

- Pan 1.5mm 316 stainless steel
- Stainless steel front, sides and splashback
- Vitreous enamelled control panel
- Double skin door with stainless exterior
- 25mm (1") skimming overflow and pan drain valve
- 63mm dia. stainless steel adjustable legs to front and two rollers at rear
- Six stainless steel baskets with moulded handles
- 304 stainless steel wire basket support grid in pan

CONTROLS

- Large easy to use knob - heat resistant reinforced
- Variable high boil to standby simmer burner control
- Fine adjustment water faucet for pan filling and water refreshing/starch skimming
- Pan protection safety cut-out thermostat
- Millivolt gas valve system (no electrical supply)
- Flame failure protection on pilot
- Piezo ignition to standing pilot burner

CLEANING AND SERVICING


- Open stainless steel pan for easy clean
- Hinged basket drain tray
- Removable basket support grid
- 25mm (1") drain valve for effective draining
- Easy clean stainless steel exterior
- Access to all parts from front of unit

Matching Products



CP4

450mm Single Pan Gas Pasta Cooker

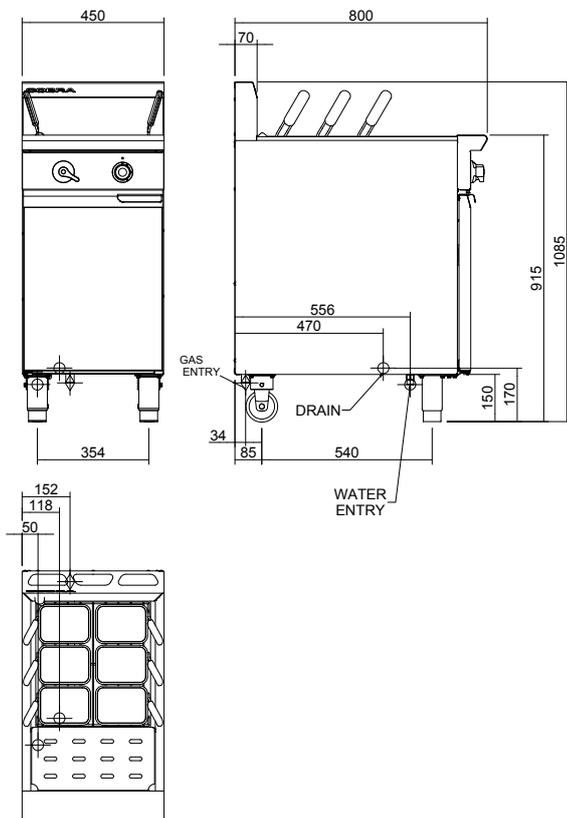

CP4

SPECIFICATIONS

Pan size
Water capacity 40L
Width 365mm
Length 405mm
Basket immersion depth 165mm

Baskets
6 stainless steel perforated baskets with moulded plastic handles
125mm x 165mm x 180mm deep
Stainless steel wire basket support grid

Burners
1 x infra-red burner

Gas power
Natural gas
12.0kW (nett), 45,450 Btu/hr (gross)
Propane gas
12.5kW (nett), 46,350 Btu/hr (gross)

Gas flow rate
Natural gas 1.27m³/hr
Propane gas 0.97kg/hr

Gas connection
R 3/4 (BSP) male
50mm from left hand side, 34mm from rear and 140mm from floor

Water connection
Cold water connection 50mm from left hand side, 556mm from rear and 140mm from floor
R1/2 (BSP) male

Drain connection
Drain must be connected to system suitable for boiling water discharge 1" BSP Male connection 118mm from left hand side, 470mm from rear, and 170mm from floor

Dimensions
Width 450mm
Depth 800mm
Height 915mm
Incl. splashback 1085mm
Nett weight 78kg

Packing data
0.587m³, 95.5kg
Width 900mm
Depth 520mm
Height 1255mm

Gas types
Available in Natural gas and Propane gas, please specify when ordering
Other gas types on request

Options
Side splash guards
Joining caps

blue-seal.co.uk

United Kingdom
blue-seal.co.uk

Blue Seal Limited
Unit 67
Gravelly Business Park
Gravelly
Birmingham B24 8TQ
England
Telephone 0121-327 5575
Facsimile 0121-327 9711
sales@blue-seal.co.uk

Australia
moffat.com.au

Moffat Pty Limited
740 Springvale Road
Mulgrave, Victoria 3170
Australia
Telephone +613-9518 3888
Facsimile +613-9518 3833
vsales@moffat.com.au

New Zealand
moffat.co.nz

Moffat Limited
Rolleston
45 Illinois Drive
Izone Business Hub
Rolleston 7675
Telephone +64 3-983 6600
Facsimile +64 3-983 6660
sales@moffat.co.nz



ISO9001
Quality
Management
Standard

Designed and manufactured by



ISO9001

All Cobra products are designed and manufactured by Moffat using the internationally recognised ISO9001 quality management system, covering design, manufacture and final inspection, ensuring consistent high quality at all times.

In line with policy to continually develop and improve its products, Moffat Limited reserves the right to change specifications and design without notice.



© Copyright Moffat Ltd
UK.C.01.19 / 1622

an Ali Group Company



The Spirit of Excellence