

CONVECTION OVENS CONVY SERIES




Hobart Cooking Solutions

Southgate Way
Orton Southgate
Peterborough
PE2 6GN




Telephone - 0844 225 1999
www.hobartuk.com/cooking

Convy Electric 10 Grid Convection Oven

HCSCYE10

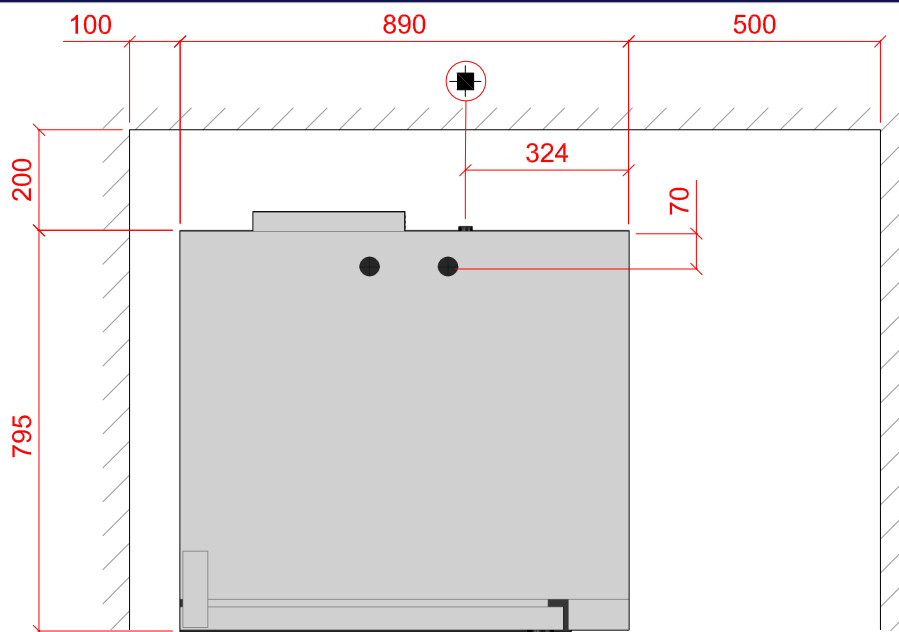

Plan View Showing
Suggested Install/Service
access Clearances

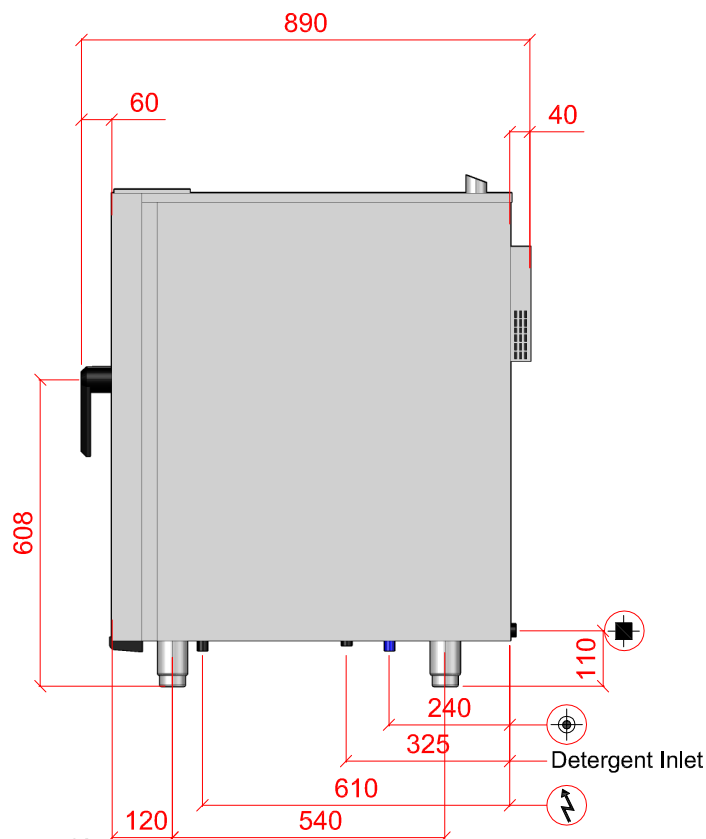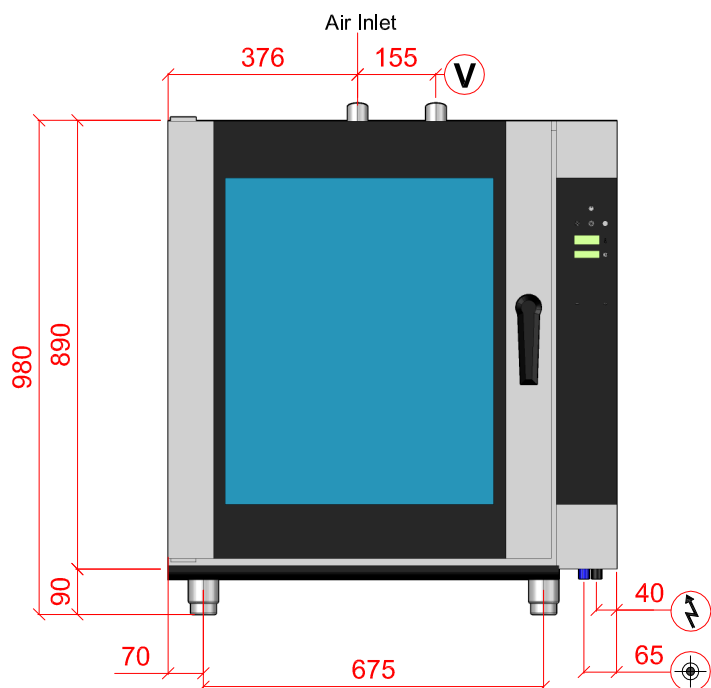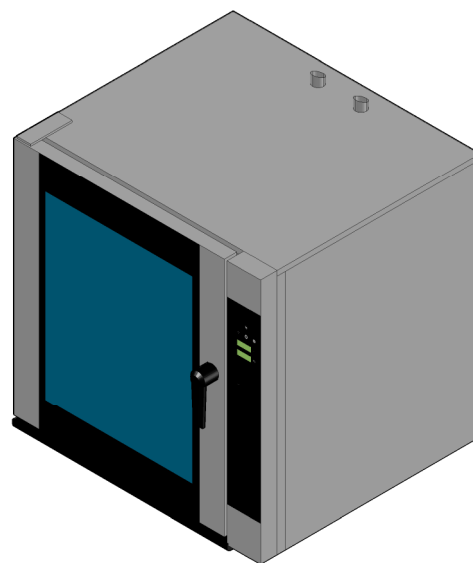

Temperature Cooking Range - 40 to 250°C

Water	Drain	Electric Loading	Vent Outlet
3/4" B.S.P. POTABLE WATER, 2.0 TO 4.0 BAR MAX PRESSURE. MAX TEMP: 30°C (2 TO 5° CLARK MAX) 5°e, 70ppm - MAX WATER HARDNESS PERMITTED. WATER QUALITY: MAXIMUM CONCENTRATION OF CHLORIDE Cl:100mg/l AND CHLORINE Cl²:0.2mg/l	1" DRAIN CONDENSATE TEMPERATURE APPROX 98°C SPECIAL NOTE: DO NOT INSTALL UNIT CLOSE TO HOT APPLIANCES ON CONTROL PANEL SIDE UNIT SHOULD BE LOCATED UNDER A VENTILATION CANOPY. RECOMMENDED TO BE USED WITH A WATER TREATMENT SYSTEM. WEIGHT 160kg net	18.5kW 400/50/3 + N + E FUSE AT 26.7 AMPS/PHASE	Ø40mm RECOMMENDED EXTRACTION FLOW 390m ³ /hour
RIGHT TO MAKE NECESSARY CHANGES IS RESERVED			



ELECTRICAL CONNECTION



WATER CONNECTION



DRAIN



VENT OUTLET

PLOT SCALE: 1:15