

CHIEFTAIN GRILL

G2522



DESCRIPTION

High performance, gas grill designed to cope with constant throughput in the busiest kitchens.

Stainless exterior and interior linings are designed to be easily cleaned. A removable drip tray is supplied to catch food debris with an additional tray supplied to be located upon the toast rack.

Two heat zones offer cooking flexibility and reduced energy consumption. Supplied as standard with reversible cast aluminium brander and grid shelf.

FEATURES and BENEFITS

- Three high-power gas burners
 - *cope with non-stop throughput in busy kitchens*
- Twin heat control
 - *low and high settings for chamber heat*
- Variable brander height
 - *allows food to be cooked at preferred position*
- Supplied with aluminium brander, grid shelf and drip tray
 - *added flexibility with no added cost*
- Various mounting options available
 - *Floor stand, wall bracket or bench legs*

OPTIONAL ACCESSORIES

- Floor stand
- Wall bracket
- Bench legs
- Brander (additional)
- Grid shelf (additional)

VENTILATION

Adequate ventilation, whether natural or mechanical, must be provided to supply sufficient fresh air for combustion and to allow easy removal of such products that may present risk to health. Recommendations for ventilation of appliances are given in BS5440:2 and HVCA specification DW/172. For multiple installations, requirements for individual appliances should be added together. Installation of any such system must be completed in accordance with local and/or national regulations that apply at time of commissioning

SITING

150mm clearance around grill is required from any combustible wall or object liable to damage when overheated. A minimum vertical clearance of 900mm above flue top edge should be observed to ensure no overheating of overlying combustible surfaces. Minimum clearance of 400mm from RH side is necessary to allow removal of outer panel for service access. Never mount a grill directly upon a table surface. Upper regions of unit will become very hot, it should therefore be positioned in a manner which minimises any risk of accidental touching.






CHIEFTAIN GRILL

G2522

MODEL DIMENSIONS (in mm)

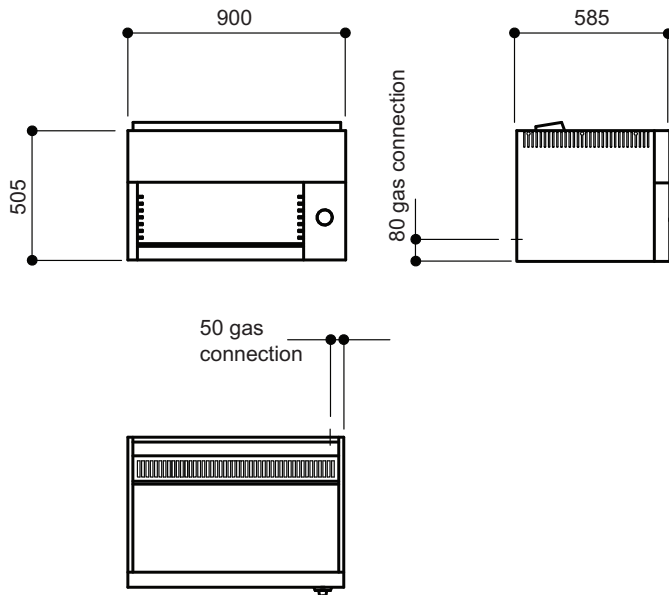

SPECIFICATION DETAILS

* ratings are gross values

G2522

Gas rating * (kW)	14.6
Gas rating * (btu/hr)	49,600
Gas inlet (Natural/Propane)	1/2" BSP
Gas pressure - Natural (mbar)	15
Gas pressure - Propane (mbar)	37
Weight (kg)	74
Packed weight (kg)	79

