

# FEATURES


- Low service costs
- Long life
- Available in all climate classes
- Baskets available equal to EL freezers



## | EL SS | STAINLESS STEEL LID FOR PREPARING FOOD



AVAILABLE IN 6 SIZES

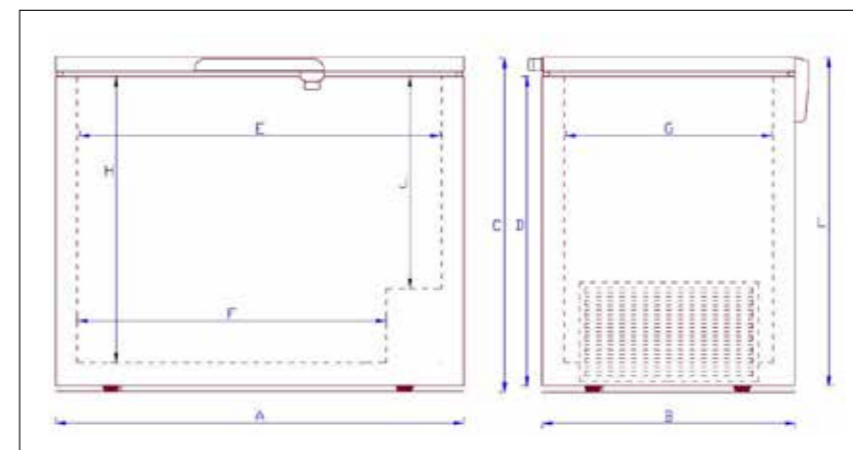

	EL 22 SS	EL 35 SS	EL 45 SS	EL 53 SS	EL 61 SS	EL 71 SS
Ambient temperature (Celsius)	+10 to +30	+10 to +30	+10 to +30	+10 to +30	+10 to +30	+10 to +30
Gross volume, litres	215	347	447	527	607	701
Net volume, litres	205	331	427	504	580	670
Temperature range inside unit (Celsius)	-14 to -22	-14 to -22	-14 to -22	-14 to -22	-14 to -22	-14 to -22
Refrigerant: R134a	Yes	Yes	Yes	Yes	Yes	Yes
Input power (watt):	124	141	146	211	211	245
Energy consumption / 24 h (kwh) at 18 deg	0,71	0,9	1,05	1,3	1,52	1,95
<b>DIMENSIONS</b>						
External dimensions (wxdxh)	720x650x860	1050x650x860	1300x650x860	1500*650*860	1700*650*860	1800x690x860
Internal dimensions (wxdxh)	606x536x750	936x536x750	1186x536x750	1386x536x750	1586x536x750	1686x536x750
Dimension A	720	1050	1300	1500	1700	1800
Dimension B	650	650	650	650	650	690
Dimension B incl. handle & hinges	730	730	730	730	730	730
Dimension C	860	860	860	860	860	860
Dimension D	780	780	780	780	780	780
Dimension E	606	936	1186	1386	1586	1686
Dimension F	406	736	986	1186	1386	1486
Dimension G	536	536	536	536	536	576
Dimension H	750	750	750	750	750	750
Dimension J	500	500	500	500	500	500
Dimension L	850	850	850	850	850	850
Insulation ,mm	60	60	60	60	60	60
<b>ACCESSORIES</b>						
Dividers	Optional	Optional	Optional	Optional	Optional	Optional
Baskets included	1	2	2	3	3	3
Max. Number of basket	1	2	3	4	4	6
Castors	Optional	Optional	Optional	Optional	Optional	Optional
Castors w. brakes	Optional	Optional	Optional	Optional	Optional	Optional
Lock	Included	Included	Included	Included	Included	Included
<b>OTHER DATA</b>						
Outer cabinet	White	White	White	White	White	White
Inner cabinet	Aluminium	Aluminium	Aluminium	Aluminium	Aluminium	Aluminium
Lid	Stainless	Stainless	Stainless	Stainless	Stainless	Stainless
Type of cooling	Static	Static	Static	Static	Static	Static
Type of defrost	Manual	Manual	Manual	Manual	Manual	Manual
Power	220V/50Hz	220V/50Hz	220V/50Hz	220V/50Hz	220V/50Hz	220V/50Hz
Power 110volt / 60 hz	Optional	Optional	Optional	Optional	Optional	Optional
Thermostat	Mechanical	Mechanical	Mechanical	Mechanical	Mechanical	Mechanical
Freezing capacity kg/ 24 h	15	22	27	36	38	43
Light in Lid	Included	Included	Included	Included	Included	Included
Calendar in Lid	Included	Included	Included	Included	Included	Included
Net weight, kg	43	54	64	67	77	85
Gross weight, kg	46	58	68	71	82	89
<b>SHIPPING</b>						
20' cont. Capacity	42	30	24	20	18	14
40' cont. Capacity	90	64	50	46	40	30
40' HC cont. Capacity	126	88	70	61	52	42
Standard Trailer capacity	102	74	60	52	44	42