

Datasheets

UltraVent - Type XS 6-2/3



Article number

60.73.865

Description

The UltraVent XS gets rid of the steam emitted with its condensation technology. No connection to the outside or extension of an existing exhaust system is necessary with this air recirculation hood. Installation is simple, and the hood can be retrofitted at any time.



Intended use

This product is only intended for commercial use, such as in restaurant kitchens or catering operations for schools, hospitals, or delis. Any other use runs counter to its intended purpose, and could be dangerous. Any other use runs counter to its intended purpose, and could be dangerous.

Variants

- 60.73.865: UltraVent XS 6-2/3 E
- 60.73.945: Combi-Duo adapterkit UltraVent XS 6-2/3 E (until 02/2023)
- 60.73.943: UltraVent XS 6-2/3 E + Combi-Duo adapterkit UltraVent XS 6-2/3 E (from 02/2023)

Features

- Reliably reduces escaping steam and vapours thanks to the high extraction rate
- Easy to clean baffle plate, dishwasher safe
- Automatically boosts extraction rate when cooking cabinet door is opened

Technical specifications

Connection:	200-240 V - 1 NAC
Frequency:	50/60 Hz
Connected load:	140-160 W
Current consumption (A):	0,7 A
Extraction capacity:	280-560 m ³ /h
Operating noise level:	52-67 dB(A)

Dimensions and weights

Width (W):	657 mm
Height (H):	250 mm
Depth (D):	583 mm
Weight:	30 kg

Material

Rust-free stainless steel (CNS 1.4301/AISI 304)

Note

- The condensation effect of the UltraVent condensation hood can significantly reduce the amount of supply and exhaust air required for iCombi appliances. Specific information can be found in the RATIONAL planner's manual. Local standards and regulations for ventilation and air conditioning systems must be observed.
- The condensation hood can be used for right-sided units as well as for left-sided units. An installation option for both variants is included in the scope of delivery
- Not to be used with VarioSmoker
- We recommend maintaining an overhead clearance of at least 250 mm for all cooking systems and Combi-Duos using an UltraVent or an UltraVent Plus


Datasheets**UltraVent - Type XS 6-2/3****Approvals**

Datasheets


UltraVent - Type XS 6-2/3




Rückansicht
Back view
Vue arrière

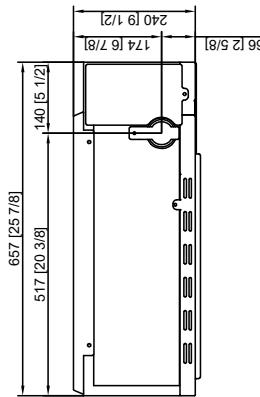


Seitenansicht
Side view
Vue de côté

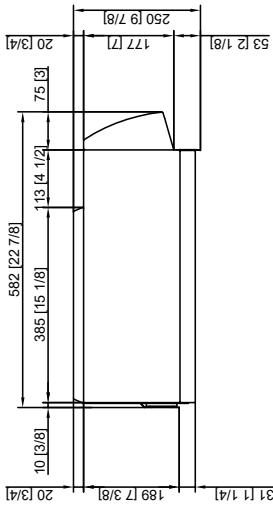

Vorderansicht
Front view
Vue de face

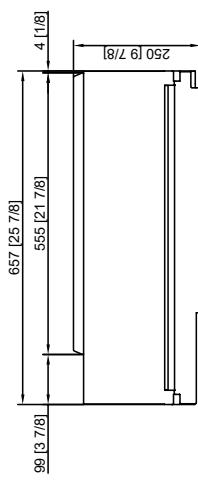

Draufsicht
Top view
Vue de dessus

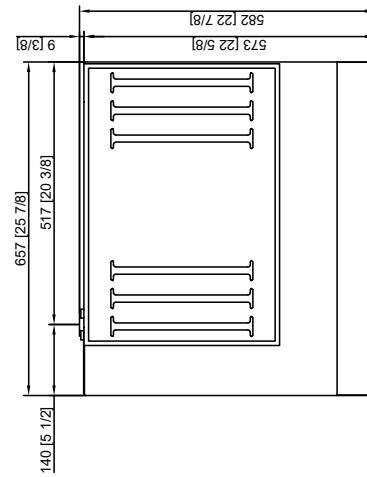

Anschlussseite/Connexion/Connexion/Connexion/Connexion/Connexion	
Zeichnungsausdruck unterliegt nicht dem Änderungsbedarf! Printed drawing is not automatically updated! La plan à jour n'est pas assurée sur les plans papier!	
Ultravent XS - CP	Ultravent XS - 2-3
Datum/Date/date	30.09.2019
Ersteller/Created/Créateur	RATIONAL AG 2019
Maßstab/Scale/Échelle	1:1
Abmessungen/Dimensions/Dimensions	mm/inch
Bauart/Design/Modèle	
Index	
Datum/Date/date	
Name/Name/Nom	
Nr. No. Numéro/Ref/Ref/Ref/Ref/Ref/Ref	
1	
2	
3	
4	
5	
6	
7	
8	