

Cafeterias • Convenience Stores Catering • Concessions



FDWDE-1X with accessory 5-shelf multipurpose rack pg. 2



FSDT-2 with accessory 5-shelf multi-purpose rack (decals shown not available) pg. 3



MDW-1X in standard Designer Black with optional hood with backlit sign cut out on one side (sign included) pg. 7



FSHC-6W1 with standard Silver Gray side panels and top, and accessory food pans pg. 8



FSHC-7-1 with standard Silver Gray side panels and top, and accessory food pans pg. 9



FS2HAC-2PT Pass-through style with accessory food pans pg. 10

Flav-R-Fresh® **Impulse Display Cabinets**

A profitable way to create impulse food sales is with the small Flav-R-Fresh® Holding and Display Cabinet. Using separate heat and humidity controls to keep crisp foods crisp and moist foods moist allows you to showcase your products longer using minimum counter space.

- The rounded designed cabinet features tempered glass sides and door for full-view display
- Incandescent light enhances food appeal while safeguarding food products from bulb breakage
- Internal thermometer indicates cabinet temperature
- Single- or double-door opening models provide fast access to food racks
- Food decals and merchandising signs are available to help promote product



FDWDE-1 with rotating 4-tier rack and accessory pizza pans

IMPULSE DISPLAY CABINETS					
Model* [⊙]	Descriptiono	Dimensions W x D x H•	Voltage Single Phase	Ship Weight	
FDWDE-1	1 Door w/Circle Rack w/Motor	492 x 530 x 726 mm	240	38 kg	
FDWDE-1X	1 Door w/Multi-Purpose Rack	492 x 530 x 726 mm	240	38 kg	
FDWDE-2	2 Doors w/Circle Rack	492 x 559 x 726 mm	240	40 kg	
FDWDE-2X	2 Doors w/Multi-Purpose Rack	492 x 559 x 726 mm	240	40 kg	

Models FDWDE-1 and FDWDE-2 include rack motor. Models with "X" designator do not have revolving display and are NOT available for retrofit.

All Impulse Display Cabinet Models Feature:

Cabinet Opening Dimensions: 400 W x 502 H mm.

Door Hinges: Control Side: Left-hand side.

Customer Side (Two-Door Models Only): Right-hand side.

Max. Pizza Pan Size: 381 mm diameter.

Water Tank Capacity for Humidity System: 2 liters.

Cord Location: 1829 mm. Facing controls, left-hand side panel, lower right corner.

WATER QUALITY REQUIREMENTS – PAGE 11

	d Aluminum Standard –		side only (includes Metal Holder only). Available in all Designer Colors to match your unit (Black is standard).
RED	Warm Red		Adds 29 mm to height of unit. Requires one (1) Sign –
BLACK GRAY	Black Cronite		491 W x 157 H x 2 D mm (not included)
WHITE	Gray Granite White Granite	FDWD-6SIGN	162 mm One-Sided Merchandising Display Sign Holder
NAVY	Navy Blue	i bii b coiuit	(includes Metal Holder and Window) – one per side.
GREEN	Hunter Green		three maximum. Available in all <i>Designer</i> Colors to
COPPER	Antique Copper		match your unit (Black is standard). Adds 32 mm to height
ACCESSOR	RIES	FDWD-DIS	of unit. Requires one (1) Sign – 491 W x 159 H x 1.59 D mm (not included) 76 mm One-Sided Merchandising Display Sign Holder
FDWD-LEGS		LUMD-DI2	(includes Med Holder and Window) – one per side, three maximum . Available in all <i>Designer</i> Colors to match your unit (Black is standard). Adds 32 mm to heigh of unit. Requires one (1) Sign – 484 W x 83 H x 2 D mm (not included)
COUPLING			
	(select Circle Rack or Pretzel Tree)		
FDWD4TCRR	4-Tier Circle Rack with Pizza Pan Retainers (requires Coupling for -1X or -2X models)		
FDWD4SMP	4-Shelf Multi-Purpose Rack (each shelf – 346 W x	-	(not moladod)
	321 D mm)		
FDWD3TPT	3-Tier Pretzel Tree (requires Coupling for -1X or -2X		
	models)		



^oNon-humidified cabinet available. Unit will only operate in dry mode.

Rack listed is included with unit. Other racks available.

[·] Height includes standard 25 mm legs.



Flav-R-Savor® Holding & Display Cabinets

Balancing a precise combination of heat and humidity, the Hatco Flav-R-Savor® Cabinets provide an attractive showcase for hot food displays and generate impulse sales. A complete range of cabinet sizes, door options and rack types allows for perfect merchandising of food products such as pizza, fried foods, bakery items, sandwiches and more.

- Full-view display with tempered glass sides and door provide maximum heat retention
- Controlled heat and humidity for longer holding times
- 3-liter stainless water reservoir provides all day moisture
- Low-water protection prevents heating element burnout and alerts operator to low-water condition
- Revolving or stationary display racks
- Available in two heights with singleor double-sided opening models
- Fluorescent lights with clear plastic cover help showcase food product







FSD-2X with 3-tier pan rack and accessory and food pans

DISPLAY CABINETS					
Model* [⊙]	Description ^o	Dimensions W x D x H	Voltage Single Phase	Watts	Ship Weight
Standard					
FSD-1	1 Door w/3-Tier Circle Rack	569 x 612 x 699 mm	240	1440	50 kg
FSD-1X	1 Door w/3-Tier Pan Rack	569 x 612 x 699 mm	240	1440	50 kg
FSD-2	2 Doors w/3-Tier Circle Rack	569 x 642 x 699 mm	240	1440	52 kg
FSD-2X	2 Doors w/3-Tier Pan Rack	569 x 642 x 699 mm	240	1440	51 kg
Tall					
FSDT-1	1 Door w/4-Tier Circle Rack	569 x 612 x 826 mm	240	1440	54 kg
FSDT-1X	1 Door w/4-Tier Pan Rack	569 x 612 x 826 mm	240	1440	54 kg
FSDT-2	2 Doors w/4-Tier Circle Rack	569 x 642 x 826 mm	240	1440	55 kg
FSDT-2X	2 Doors w/4-Tier Pan Rack	569 x 642 x 826 mm	240	1440	52 kg

[•] Models FSD-1, FSD-2, FSDT-1 and FSDT-2 include rack motor. Models with "X" designator do not have revolving display and are NOT available for retrofit.

All Display Cabinet Models Feature:

 $\textbf{Cabinet Opening Dimensions: Standard Models:} \ 483\ \text{W}\ \text{x}\ 473\ \text{H}\ \text{mm}.$

Tall Models: 483 W x 603 H mm.

Door Hinges: Control Side: Left-hand side.

 $\label{lem:customer_side} \textbf{Customer Side (Two-Door Models Only):} \ \textbf{Right-hand side}.$

Max. Pan Size: 483 mm diameter.


Water Tank Capacity for Humidity System: 3 liters.

Cord Location: 1829 mm. Facing controls, left-hand side panel, lower right corner.

OPTIONS AND ACCESSORIES – PAGE 4 DECORATIVE KIT – PAGE 5

RACKS – PAGE 6

WATER QUALITY REQUIREMENTS – PAGE 11



CONTROLLED MOISTURIZED HEAT KEEPS HOT FOODS FRESH LONGER Flav-R-Savor air flow pattern is designed to maintain consistent cabinet temperature without drying out foods. The precise combination of heat and humidity creates a "blanket" effect around the food. The air flow rate enables the cabinet to recover temperature rapidly after opening and closing the door.



^o Rack listed is included with unit. Other racks available.

^oNon-humidified cabinet available. Unit will only operate in dry mode.



FSDT-1 with 4-tier circle rack, optional sign holders (signs not included) and accessory food pans

OPTIONS (available at time of purchase only)

Mechanical Controls

Designer Color	rs – Non-standard colors are non-returnable – Clear Anodized Aluminum Standard –
RED	Warm Red
BLACK	Black
GRAY	Gray Granite
WHITE	White Granite
NAVY	Navy Blue
GREEN	Hunter Green
COPPER	Antique Copper

FSD7SIGN

191 mm Merchandising Display Sign Holder (includes Metal Holder and Window) – one per side, three maximum. Available in all *Designer*Colors to match your unit (Black is standard). Adds 32 mm to height of unit. Requires one (1) Sign – 572 W x 191 H x 2 D mm (not included)

ACCESSORIES

THERM

F-LEGS-4	102 mm Adjustable Legs
COUPLING	Motorless Rack Coupling for FSD-1X, FSD-2X, FSDT-1X & FSDT-2X models (select appropriate Circle Rack)
RACK - FSD ON	ILY –
FSD5SMP	5-Shelf Multi-Purpose Rack (each shelf – 457 W x 406 D mm)
FSD3TCR	3-Tier Circle Rack with Pizza Pan Retainers (requires Coupling for -1X or -2X models)
FSD3TPR	3-Tier Pan Rack (accommodates Half-Size Sheet Pans – not included)
RACKS - FSDT	ONLY —
FSDT7SMP	7-Shelf Multi-Purpose Rack (each shelf – 457 W x 406 D mm)
FSDT4TCR	4-Tier Circle Rack with Pizza Pan Retainers (requires Coupling for -1X or -2X models)
FSDT5TCR	5-Tier Circle Rack with Pizza Pan Retainers (requires Coupling for -1X or -2X models)
FSDT4TPR	4-Tier Pan Rack (accommodates Half-Size Sheet Pans – not included)
FSDT3SAR	3-Shelf Angle Rack (15° angle shelves). Each shelf – 457 W x 413 D mm

DECORATIVE KIT – 5 RACKS – PAGE 6

COLORS AND FINISHES – PAGE 11

FSDT3TPT 3-Tier Pretzel Tree (requires Coupling for -1X or -2X models)



Flav-R-Savor® **Decorative Kit for FSD** and **FSDT Models only**

Transform your Hatco Flav-R-Savor® Holding & Display Cabinet from a "heated box" into a Designer Merchandiser with a variety of simple accessory additions. Create a new look and feel to your décor.

- The curved hinged header allows easy access to controls and water fill cup, and gives a great area to brand your food product with a magnetic sign (sign not included)
- All decorative pieces come standard in Designer Black powdercoat, with additional Designer colors available
- Curved inset panels enhance the overall look
- The base skirt completes the transformation and gives additional branding area. Available in flat or curved panels for front and/or back of unit
- Signs not included


OPTIONS (available at time of purchase only – additional lead time required)

Designer Colors – Non-standard colors are non-returnable –			
RED WR	Warm Red		
BLACK BK	Black		
GRAY GG	Gray Granite		
WHITE WG	White Granite		
NAVY NB	Navy Blue		
GREEN HG	Hunter Green		
COPPER AC	Antique Copper		

ACCESSORIES

Side Incets - Must che	ose Designer Color – Black Standard –
FSD-INSET1-BK ®	Two (2) Crescent Inset Panels for FSD Models – Black
FSD-INSET2-BK	Two (2) Wave Inset Panels for FSD Models – Black
FSDT-INSET1-BK @	Two (2) Crescent Inset Panels for FSDT Models – Black
FSDT-INSET2-BK	Two (2) Wave Inset Panels for FSDT Models – Black
Top Covers - Must cho	ose Designer Color – Black Standard –
FSD-CTLH-BK •	Curved Hinged Header on control side for FSD and FSDT models – Black
FSD-CUSH-BK ❷	Curved Header on non-control side for FSD and FSDT models – Black
Base Skirts – Requires Designer Color – Black	102 mm Adjustable Legs (not included) – Must choose Standard –
FSD-SQB-BK @ Ø	
TOD-OQD-DR O O O	Flat Back Panel for FSD and FSDT models – Black
FSD-1CB-BK ���	One (1) Curved Front Panel, two (2) Flat Side Panels and one
	(1) Flat Back Panel for FSD and FSDT models – Black
FSD-2CB-BK 🛛 🗗 🗗	One (1) Curved Front Panel, two (2) Flat Side Panels and one
	(1) Curved Back Panel for FSD and FSDT models – Black
F-LEGS-4	102 mm Adjustable Legs for FSD and FSDT models

COLORS AND FINISHES – PAGE 11

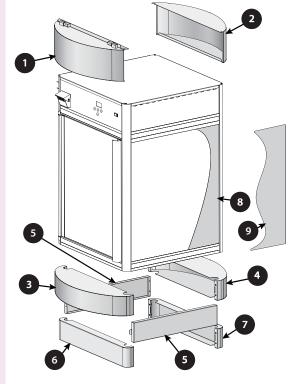





FSDT-1 with 4-tier circle rack and full Decorative Kit (signs not included)

Display Rack Selections


Racks for FDWDE Models (Page 2)



4-Tier Circle Rack FDWD4TCRR (Max. 381 mm dia. pans) (83 mm opening)




4-Shelf Multi-Purpose Rack FDWD4SMP (Max. 457 x 330 mm Half-Size Sheet Pans – FDWD-2X only) (95 mm opening)




3-Tier Pretzel Tree FDWD3TPT (149 mm opening)


Racks for FSD/FSDT Models (Page 3)



FSDT 4-Tier Circle Rack FSDT4TCR (Max. 483 mm dia. pans) (117 mm opening)




5-Tier Circle Rack FSDT5TCR (Max. 483 mm dia. pans) (98 mm opening)



FSDT 4-Tier Pan Rack FSDT4TPR (Max. 457 x 330 mm Half-Size Sheet Pans) (89 mm opening)




FSDT 3-Shelf Angle Rack FSDT3SAR (89 mm opening)



FSDT 3-Tier Pretzel Tree FSDT3TPT (149 mm opening)



FSDT 7-Shelf Multi-Purpose Rack FSDT7SMP (Max. 457 x 330 mm Half-Size Sheet Pans) (64 mm opening)



FSD 3-Tier Circle Rack FSD3TCR (117 mm opening)



FSD 3-Tier Pan Rack FSD3TPR (89 mm opening)



FSD 5-Shelf Multi-Purpose Rack FSD5SMP (64 mm opening)



Mini Display **Warmers**

The Hatco Mini Display Warmer is perfect for cookies, pastries, wrapped or boxed sandwiches or any other product that does not require humidity. Hot air circulates throughout the entire cabinet, keeping food at safeserving temperatures. The small footprint takes up little of your valuable counterspace while merchandising your breakfast, lunch or dinner offerings.



Magnetically adjustable shelves provide flexibility for a variety of product choices

- · Magnetically adjustable shelves allow horizontal or slanted displays
- Tempered glass sides and incandescent light showcase your food
- Thermostatic control with rocker switch
- Field reversible door hinge location
- Available as a 1-door or a 2-door pass-through model
- Doors may be field converted to any side
- Optional black hood with backlit graphic sign cutout that can be rotated in field to face any side (sign included)



MDW-1X in standard Designer Black with optional hood with backlit sign cut out on one side (sign included)

MINI DISPLAY WARMERS - NON-HUMIDIFIED

Model	Description	Dimensions W x D x H	Voltage Single Phase	Ship Weight
MDW-1X	1 Door w/3 Shelves	400 x 432 x 646 mm	230	21 kg
MDW-2X	2 Doors w/3 Shelves	400 x 465 x 646 mm	230	24 kg

All Non-Humidified Mini Display Warmer Models Feature:

Cabinet Opening Dimensions: 315 W x 396 H mm. Door Hinges: Control Side: Left-hand side.

Customer Side (Two-Door Models Only): Right-hand side.

Cord Location: Facing controls, lower right corner.

OPTIONS (available at time of purchase only) Designer Colors for Posts, Base and Top Trim - Non-standard colors are non-returnable - Black Standard -

GRAY	Gray Granite
WHITE	White Granite
NAVY	Navy Blue
GREEN	Hunter Green
COPPER	Antique Copper
BCKLIT-MDW	Hood with Backlit Sign cut out on one side (Sign included) – Black only
	· · · · · · · · · · · · · · · · · · ·

ACCESSORIES

Aluminum Tray - 314 W x 314 D x 6 H mm MDW-TRAY

COLORS AND FINISHES – PAGE 11





Flav-R-Savor® Portable Holding Cabinets

Prepare food in advance of peak serving periods and safely hold it at optimum serving temperatures with the Flav-R-Savor® Portable Holding Cabinet. Thermostatically-controlled heat and humidity allows you to hold product for hours.

- Thermostatically-controlled heat and humidity holds hot food at optimum serving temperatures longer
- Allows preparation of food in advance of peak serving periods
- Accommodates Gastronorm pans
- Electrical components, controls, water reservoir and digital temperature readout are located at the top for easy access
- Reduced height less than 762 mm high and wider footprint for increased capacity
- Stacking kit available

 Insulated side walls, field reversible glass doors, large swivel casters with wheel locks and 1829 mm recessed cord & plug set are standard



LOW PROFILE HOLDING CABINETS					
Model	Description	Dimensions W x D x H [●]	Voltage Single Phase	Watts	Ship Weight
FSHC-6W1	1 Door	645 x 751 x 816 mm	240	1697	76 kg
FSHC-6W2*	2 Doors	645 x 811 x 816 mm	240	1697	82 kg

- · Height includes standard casters.
- FSHC-6W2 is a two-door pass-through single cabinet, not two units stacked.

All Low Profile Holding Cabinet Models Feature:

Cabinet Opening Dimensions: 546 W x 483 H mm.

Top Surface Dimensions: 645 W x 657 D mm.

Models Shipped with: A 1829 mm cord & plug set, 102 mm diameter casters (with 130 mm clearance) and six (6) sets of adjustable angle slides.

Pan Capacity: Six (6) 457 W x 660 D mm sheet pans or six (6) 2/1 Gastronorm pans on 76 mm centers; eleven (11) 457 W x 660 D mm sheet pans¤; eleven (11) 2/1 Gastronorm pans on 38 mm centers¤; or twelve (12) 508 W x 305 D x 64 H mm hotel pans¤.


Water Tank Capacity for Humidity System: 3 liters.

Cord Location: Back of unit, upper right side.

With purchase of extra pan slides.

WATER QUALITY REQUIREMENTS - PAGE 11

BLACK	nnels) – Non-standard colors are non-returnable – Silver Gray Standard – Designer Black
SS	Stainless Steel
Colors (Top) -	Non-standard colors are non-returnable – Silver Gray Standard –
BLACK	Silver Gray
SS	Stainless Steel
6W-SS-DR	Stainless Steel Door in lieu of Glass Door
HD-SS-DR	Heavy-Duty Stainless Steel Door with Positive Latch Handle
6W1-LPCAST	51 mm Low Profile Locking Casters in lieu of standard Casters (51 mm diameter
	with 76 mm clearance – overall height is 756 mm)
6W1-STACK	Silver Gray Stack Hardware mounted to top of Cabinet for two (2) FSHC-6W1 unit
	in lieu of Casters
CORDWIND	Bracket for holding Cord during transport
ACCESSOR	VIES
6W1-SLIDE	Extra Pan Slides
COLORS AND	FINISHES – PAGE 11

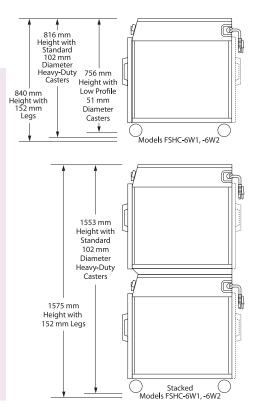





Flav-R-Savor® Humidified Portable Holding Cabinets

Prepare food in advance of peak serving periods and safely hold it at optimum serving temperatures with the Flav-R-Savor® Portable Holding Cabinet. Thermostatically-controlled heat and humidity allows you to hold product for hours.

- Thermostatically-controlled heat and humidity holds hot food at optimum serving temperatures longer
- Allows preparation of food in advance of peak serving periods
- Accommodates Gastronorm pans
- Electrical components, controls, water reservoir and digital temperature readout are located at the top for easy access
- Insulated side walls, field reversible glass doors, large swivel casters with wheel locks and 1829 mm recessed cord and plug are standard
- Stacking kit available



FSHC-7-1 with standard 102 mm casters and accessory food pans

PORTABLE HOLDING CABINETS					
Model*	Description	Dimensions W x D x H [●]	Voltage Single Phase	Watts	Ship Weight
FSHC-7-1	1 Door	578 x 753 x 892 mm	240	1697	79 kg
FSHC-7-2+	2 Doors	578 x 812 x 892 mm	240	1697	82 kg

- * Seven (7) slides on each side. Sheet pans not included. 6-shelf multi-purpose rack can be substituted for angle slides.
- · Height includes standard casters.
- *FSHC-7-2 is a two-door pass-through single cabinet, not two units stacked.

All Portable Holding Cabinet Models Feature:

Cabinet Opening Dimensions: 470 W x 559 H mm. Top Surface Dimensions: 575 W x 657 H mm.

Models Shipped with: A bracket for holding cord during transport (FSHC-7-1 unit only), 102 mm diameter casters (with 130 mm clearance) and seven (7) sets of adjustable angle slides for 457 W x 660 D mm pans or 305 W x 508 D mm pans.


Pan Capacity: Seven (7) 457 W x 660 D mm sheet pans on 76 mm centers; seven (7) 508 W x 305 D x 64 H mm^{ra} hotel pans; or seven (7) 1/1 Gastronorm pans^{ra}.


Water Tank Capacity for Humidity System: 3 liters.

Cord Location: A 1829 mm cord & plug set, back of unit, upper right side.

WATER QUALITY REQUIREMENTS – PAGE 11

	<i>Designer</i> Black					
SS	Stainless Steel					
Colors (Top) -	Non-standard colors are non-returnable – Silver Gray Standard –					
BLACK	Designer Black					
SS	Stainless Steel					
SS-DR	Stainless Steel Door in lieu of Glass Door					
HD-SS-DR	Heavy-Duty Stainless Steel Door with Positive Latch Handle					
LPCAST	51 mm Low Profile Casters in lieu of standard Casters (51 mm diameter with					
	76 mm clearance – overall height is 832 mm)					
4LEGS	102 mm Adjustable Legs in lieu of standard Casters					
6SS	152 mm Stainless Steel Legs in lieu of standard Casters					
7-1-STACK	Silver Gray Stacking Hardware mounted to top of Cabinet for two (2) FSHC-7-1					
	units in lieu of Casters					
CORDWIND	Bracket for holding Cord during transport					
I <i>CCESSOR</i>	RIES					
SLIDEWIRE	Wire Shelf					
01.000.4110	FINIOUES PLOE 44					
OLORS AND	FINISHES – PAGE 11					
	SLIDEWIRE					
	Accessory					

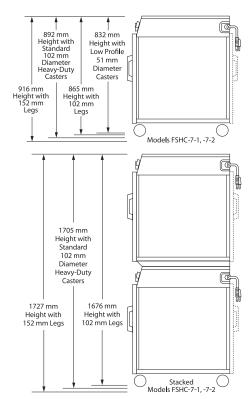



Flav-R-Savor® Heated Air Curtain Cabinets

The patented Flav-R-Savor® Heated Air Curtain Cabinet effectively and safely holds hot food hot without the use of doors, allowing immediate access to product. Warm air at the front of the cabinet is forced downward, through the ducts above the opening, forming a "curtain" of heated air. A portion of the heated air is drawn toward the rear of the cabinet, warming each pan.

- Perfect for holding wrapped or sealed product like tortillas, burritos and ribs, as well as product on sheet pans like biscuits, hamburger patties and baked potatoes
- The 2-pan pass-through accommodates two (2) full-size sheet pans or four (4) half-size sheet pans; the 4-pan unit accommodates four (4) full-size sheet pans or eight (8) halfsize sheet pans
- Easy to use digital controls, a lighted On/Off switch and a 1829 mm cord
 8 plug set



FS2HAC-4PT 4-tier pass-through with accessory food pans

HEATED AIR CURTAIN CABINETS								
Description	Dimensions	Voltano		Watta	A	Chin Wainht		
•		3				Ship Weight		
4-Tier PT	613 x 994 x 671 mm	240	50	3389	14	75 kg 86 kg		
	Description 2-Tier PT	Dimensions Description W x D x H 2-Tier PT 613 x 994 x 468 mm	Dimensions Description W x D x H Voltage 2-Tier PT 613 x 994 x 468 mm 240	Dimensions Description W x D x H Voltage Hz 2-Tier PT 613 x 994 x 468 mm 240 50	Dimensions Description W x D x H Voltage Hz Watts 2-Tier PT 613 x 994 x 468 mm 240 50 2589	Dimensions Description W x D x H Voltage Hz Watts Amps 2-Tier PT 613 x 994 x 468 mm 240 50 2589 12.6		

All Heated Air Curtain Cabinet Models Feature:

Cabinet Opening Dimensions: FS2HAC-2PT: 459 x 216 mm.

FS2HAC-4PT: 464 x 411 mm.

Cord Location: Top of unit towards the back, left side.



Water Quality Requirements

Water supply in excess of .75 grains of hardness per liter (GPL) must be treated and softened before being used. Water containing over .75 GPL will decrease the efficiency and reduce the operating life of the unit.

NOTE: Product failure caused by liming or sediment buildup is not covered under warranty.

Paint Chip Sample Colors

DESIGNER COLORS



Warm Red



Black



Gray Granite



White Granite



Navy Blue



Hunter Green



Antique Copper

Colors are a representation and may not exactly match our colors. Consult factory for possible color matching options on these colors. Non-standard colors are non-returnable.



Scan with web-enabled mobile device to visit www.hatcocorp.com

Hatco Corporation
St. George's House | Rearsby Business Park
Gaddesby Lane | Rearsby | Leicestershire LE7 4YH
Tel: 01509 260 140 | Fax: 01509 260 151 www.hatcocorp.com | sales@gamblefs.co.uk