

Self Contained Ice Machine up to 50 kg



Stainless steel legs

Routine Maintenance Alarm



Front ON-OFF Switch


Proximity condenser air filter



Storage bin antibacterial pouch & holder



Patented anti-Scale system



Water outlet
(Progressive Water Discharge)



WATER DISCHARGE up to 15 mt away and 1.7 mt high with PWD

Features

- Produces individual Gourmet crystal clear supercubes
- Up to 50 kg (110 lb) daily ice cubes production
- Up to 23 kg (50 lb) ice storage capacity
- Resistant stainless steel exterior
- Simple and reliable electromechanic controls
- Front panel in & out airflow (air-cooled model only) for built-in installation
- Front access condenser air filter, removable and washable (air cooled version only)
- Easily accessible front ON-OFF Switch
- Routine Maintenance visible alarm light on front panel
- Ergonomically designed ice-storage access, with disappearing door
- Door-closing movement dampening system
- Vapor-based microbial control system pouch in ice-storage area
- Water system protected by patented anti-scale system
- PWD System for remote water drain (easy -fit installation)
- AgION antimicrobial agent embedded in moulded plastics parts
- CFC-free R-134a Refrigerant
- 3 years manufacturer warranty

EC 106 Technologies



		10°C: 10°C			21°C: 15°C			23°C: 15°C			[WxDxH mm] 530x600x840/930
		[kg]	[lb]	N°	[kg]	[lb]	N°	[kg]	[lb]	N°	
ECM 106 AS	+	50	110	2500	46	101	2300	23	50	1150	[WxDxH inches] 20"x23"x33"/37"
ECM 106 VS	-	50	110	2500	46	101	2300	23	50	1150	
ECL 106 AS	+	50	110	1280	46	101	1180	23	50	590	
*Estimate number of medium or large size Gourmet cubes.											



[V/Hz/ph]
230/50/1



R134a

Medium Gourmet
20 g



Ø 29 x H 34 mm

Large Gourmet
39 g



Ø 38 x H 41 mm

This product qualifies for the following listings:



3 Years Warranty


Subject to certain limitations and exclusions

Certified ISO 9001:2008

www.scotsman-ice.it
www.scotsman-ice.com

Models and specifications are subject to change without notice.

Self Contained Ice Machine up to 50 kg

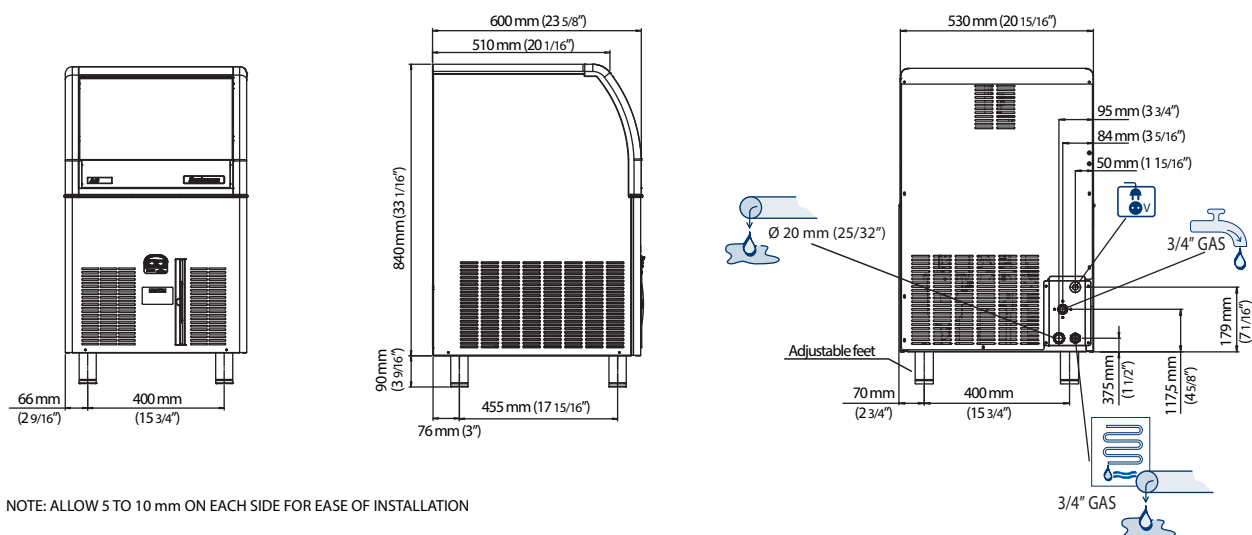

EC 106 AIR COOLED

°C / °F	50° 10°	60° 15°	70° 21°	90° 32°	
10°	50	48.5	47	44	kg
50°	110	107	103.5	97	lb
21°	47.5	46	44.5	41.5	kg
70°	105	101	98	91.5	lb
32°	41	39.5	38	35	kg
90°	90.5	87	84	77	lb
38°	38	36.5	35	32	kg
100	84	80.5	77	70.5	lb

24h

EC 106 WATER COOLED

°C / °F	50° 10°	60° 15°	70° 21°	90° 32°	
10°	50	48.5	47	44	kg
50°	110	107	103.5	97	lb
21°	47.5	46	44.5	41.5	kg
70°	105	101	98	91.5	lb
32°	44	42.5	41	38	kg
90°	97	93.5	90.5	84	lb
38°	43	41.5	40	37	kg
100	95	91.5	88	81.5	lb

24h

Minimum	Maximum
10°C (50°F)	43°C (110°F)
5°C (41°F)	38°C (100°F)
-10%	+10%
1 bar 14 psi	5 bar 70 psi

ECM 106 AS	ECM106 WS	ECL 106 AS
4100 1200	4100 1200	4100 1200
1,5	1,5	1,5
550	550	550
10	10	10
25.8	22.7	26.7
5.5	51.5	4.2
1.5	13.5	1.1
49 108	49 108	49 108
56 123	56 123	56 123