



CONNECTA

HEF716 INSTALL INSTRUCTIONS

THIGH-OPERATED VALVE & SPOUT

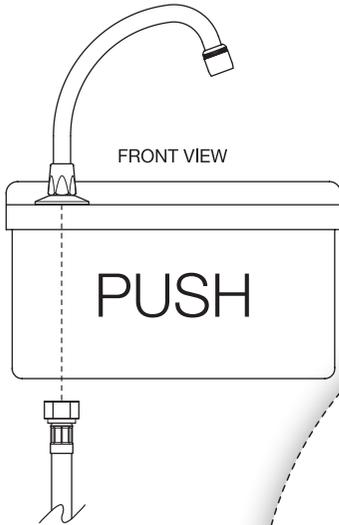


Thank you for purchasing your CONNECTA product.



Assemble the spout onto the hand basin before fixing to the wall.

- Balanced water pressure supplies required. Pressure range 1.5-3 Bar.
 - Mechline accept no responsibility for the water integrity of fittings.
 - Joint seals to be made using PTFE tape ONLY.
- NO JOINTING COMPOUNDS** to be used under any circumstances.

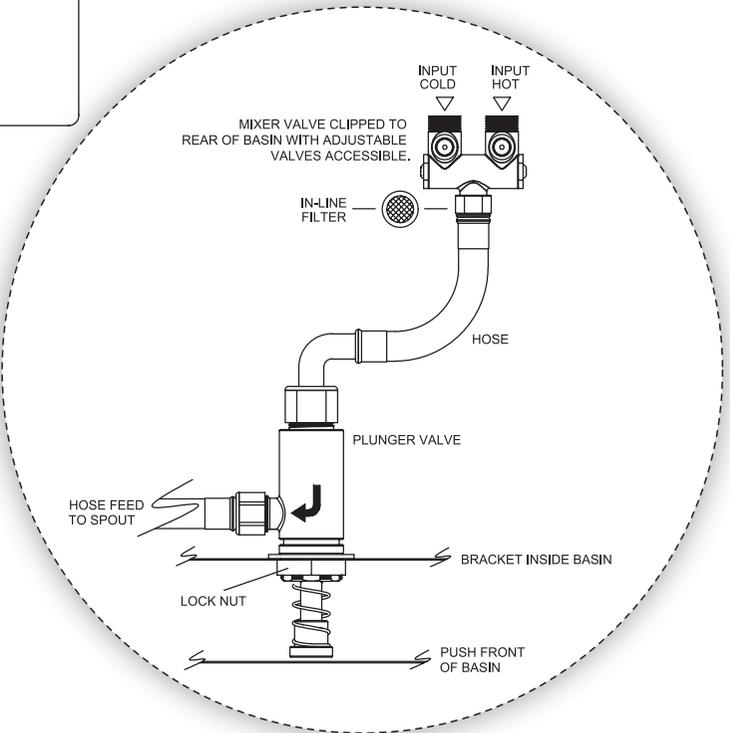

- After installation turn the adjustment screws until the desired water temperature delivery to the spout is achieved.

Telephone: **03701 647 647** | Email: **service@lockhartcatering.com**