

P/N 1301953



SALES DESCRIPTION

Capacity by basket: 16 glasses of Ø8cm. each. Hourly output: 30 baskets or 480 glasses.

- ✓ User-friendly.
- ✓ Optimal washing results.
- ✓ Sturdy and reliable.

✓ Stainless steel, sturdy and resistant washing arms.Don't get damaged because of chemical corrosion.

✓ 1.5 kW tank element: optimal recovery time.

FEATURES AND BENEFITS

 \checkmark Manufactured from catering grade stainless steel and incorporating top quality components.

 \checkmark Double skinned door with high efficiency seal, ensuring thermal and acoustic insulation. Magnetic door micro-switch.

- ✓ Easy use electro/mechanical control panel.
- ✓ Pre-set 2 min wash cycle.

✓ Removable stainless steel rack holders ensure even distribution of wash water without dead zones. Precision positioned water jets guarantee optimum washing result for even the most stubbornly stained glasses. Easy to assemble, boltless rinse spray arms.

 \checkmark A double filter system provides effective wash pump protection that is easily removed (for maintenance and cleaning) and replaced, without tools.

 \checkmark The P-35 incorporates a wash tank and independent rinse boiler.

- ✓ Automatic detergent and rinse aid dosing equipment.
- \checkmark Designed for quick and easy maintenance.
- ✓ 100% tested.

NCLUDES

- ✓ Rinse aid doser.
- ✓ 1 open basket.
- Variable detergent dosing equipment.
- ✓ 1 mixed basket.
- ✓ 1 small cutlery basket.





www.sammic.co.uk Food Service Equipment Manufacturer Unit 2, Trevanth Road Troon Industrial Park LE4 9LS - Leicester

uksales@sammic.com Tel.: +44 0116 246 1900



Project	Date
Item	Qty
Approved	

updated 07/05/2018

product sheet



GLASSWASHER P-35 230/50/1 DD

To wash 30 baskets/hour. 350x350mm racks. Max. loading height: 220mm.

ړه

SPECIFICATIONS

Basket dimensions: 350 mm x 350 mm Maximum glass height: 220 mm Cycle duration: 120 " Production baskets/hour: 30 Boiler capacity: 3.2 l Wash tank capacity: 12.7 l Water consumption/cycle: 2.3 l Electrical supply: 230 V / 50 Hz / 1 ~ (9.8 A) Plug: -

Loading

✓ ___Pump: 75 W / 0.1 Hp

✓ Tank: 2075 W

✓ Boiler: 2000 W

✓ Total loading: 2075 W

External dimensions (WxDxH)___


- ✓ Width:420 mm
- ✓ Depth: 495 mm
- ✓ Height: 645 mm


Net weight: 29,5 Kg

Crated dimensions

485 x 590 x 690 mm

Gross weight: 32 Kg.

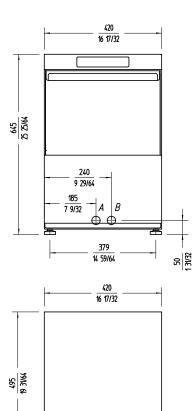





Sammic

www.sammic.co.uk Food Service Equipment Manufacturer Unit 2, Trevanth Road

LE4 9LS - Leicester uksales@sammic.com Tel.: +44 0116 246 1900

Troon Industrial Park



Project	Date
Item	Qty
Approved	