



POTATO PEELER PP-6+ 230/50/1 · 400 W

Output: 6 kg per cycle.



1000411



External dimensions with stand

- ✓ Width with stand: 411 mm
- ✓ Depth with stand: 700 mm
- ✓ Height with stand: 1020 mm

Net weight: 31 kg

Crated dimensions

440 x 710 x 470 mm

Gross weight: 33.5 kg

SALES DESCRIPTION

Aluminium made potato peeler.

Aluminium body potato peeler. Abrasive peeling. The abrasive is highly resistant and long lasting.

- ✓ Base Plate and chamber walls lined with abrasive.
- ✓ Aluminium body.
- ✓ Directable cylinder.
- ✓ Integral control panel complete with on/off push buttons and a 0-6 minute timer.

OPTIONAL

- ☐ Stainless steel floor stand.
- ☐ Water inlet kit (2003971).
- ☐ Filter with no-foam feature.

ACCESSORIES

- ☐ Stands for potato peelers PP / PPC
- ☐ Filters for potato peelers PP / PPC

SPECIFICATIONS

Hourly production: 120 kg / 150 kg

Capacity per load: 6 kg

Timer (min-max): 0' - 6'

Total loading: 400 W

Plate speed: 317 rpm

Electrical supply: 230 V / 50 Hz / 1~ (2.9 A)

Electrical connection: 2P+G

External dimensions (W x D x H)

- ✓ Width: 395 mm
- ✓ Depth: 700 mm
- ✓ Height: 447 mm



DYNAMIC PREPARATION
COMMERCIAL POTATO PEELERS

product sheet
updated 13/12/2024




POTATO PEELER PP-6+ 230/50/1 · 400 W

Output: 6 kg per cycle.



1000411

DYNAMIC PREPARATION
COMMERCIAL POTATO PEELERS

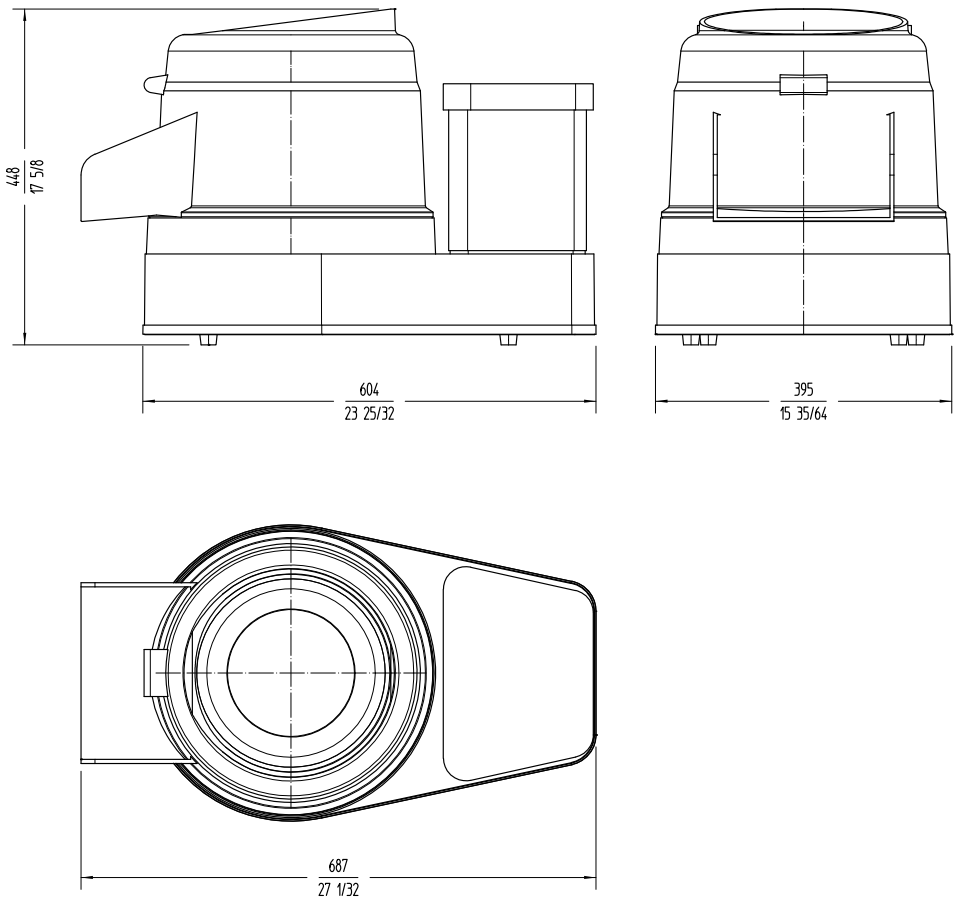

www.sammic.co.uk
Food Service Equipment Manufacturer
Unit 2, Trevanth Road
Troon Industrial Park
LE4 9LS - Leicester
uksales@sammic.com
Tel.: +44 0116 246 1900



Project	Date
Item	Qty
Approved	

product sheet
updated 13/12/2024