

# LINCAT SILVERLINK ELECTRIC FREE-STANDING OVEN RANGE CASTORS AT REAR - 4 PLATES - W 600 MM - 11.0 KW

### **MODEL: ESLR6C**



With a large capacity oven for increased productivity, the Silverlink 600 electric oven range is perfect for care homes as well as smaller pubs and restaurants. The range comes with four hotplates and a fan assisted oven for uniformed heat and consistent cooking. Built to last, the fully pressed and sealed hob tops make the unit easy to clean and maintain.

#### **SILVERLINK 600**

#### PRODUCT OPTIONS AND ACCESSORIES

SLR6/SB SPLASHBACK

#### **PRODUCT FEATURES**

- Compact 600mm deep footprint perfect for care homes as well as smaller pubs and restaurants
- Four hotplates 2 x 2.0kW, 2 x 1.5kW with six-position control knob for each plate higher power for sautéing at the front, lower power to the rear ideal for simmering
- Automatic power reduction, if the pan boils dry or is removed, prolonging hotplate life
- Easy clean fully pressed and sealed hob
- Powerful 4kW fan assisted oven for uniform heat distribution and consistent cooking
- To suit install requirements, the ESLR6C can be wired as either single or three phase
- Double insulated doors, sode and back panels providing safer operation, greater efficiency and economy
- Castors at rear to enable unit to be pulled out for deeper cleans







### LINCAT SILVERLINK ELECTRIC FREE-STANDING OVEN RANGE -CASTORS AT REAR - 4 PLATES - W 600 MM - 11.0 KW

## **MODEL: ESLR6C**

WEIGHTS & DIMENSIONS	
Width	600 mm
Depth	670 mm
Height	932 mil
Weight	60 kg

SHIPPING DETAILS	
Ship Width	70 cm
Ship Depth	80 cm
Ship Height	110 cm
Ship Weight	66 kg
Number of Shipment Parcels	1
Shipping Origin Zip Code	LN6 3QZ, UNITED KINGDOM
Quick Ship Product	No
Returnable Item	No

### **PRODUCT CERTIFICATIONS**



ENERGY SPECS	
Primary Energy Source Type	Electricity
	Single Phase 47.8/Three
Electrical Amps	Phase L1=17.4; L2=15.2;
	L3=15.2
Electrical Voltage	230 volts/400 volts
Electrical Watts	11000
Electrical Phase	Single, Three
Kilowatts	11 kW

Number of Electrical Conductor Wires	1
Electrical Connection Type	Direct Hardwired
Electrical Plug Type	Hardwired
Number of Electrical Plugs	Not Applicable
Dedicated Circuit Required	Yes
Energy Saving	No

ADDITIONAL SPECIFICATIONS	
Control Type	Rotary Control Knob
Cooking Plate Finish Material Type	Cast Iron Plate
Exterior Finish Color	Stainless Steel
Exterior Trim Finish Color	Stainless Steel
High Altitude Kit Available	No
Number of Heating Zones	4
Number of Hot Top Burners	4

Number of Shelf Positions	4
Number of Shelves	2
Open or Sealed Burners	Not Applicable
Oven Power Rating	4 kW
Oven Temperature Maximum	250 °C
Oven Temperature Minimum	50 °C
Watts Per Element	2 x 2000, 2 x 1500

Lincat reserves the right to modify specifications or discontinue models without incurring obligation. Dimensions nominal.

Document Auto-Generated January 23, 2024





### LINCAT SILVERLINK ELECTRIC FREE-STANDING OVEN RANGE -CASTORS AT REAR - 4 PLATES - W 600 MM - 11.0 KW

## **MODEL: ESLR6C**

SELECT COOKING EQUIPMENT	NUMBER OF	POW	VER RATING	ARRANGE- MENT	WIDTH	DEPTH
Electric Round Hot Plate 1		2	2	Center Front	300 mm	300 mm
Electric Round Hot Plate 2		2	1.5	Center Rear	300 mm	300 mm

SELECT BASE EQUIPMENT	NUMBER OF		CUBIC CAPACITY EACH	WIDTH	DEPTH	HEIGHT
Standard Oven 1		1		470 mm	350 mm	428 mm

### **BIDDING SPECIFICATIONS**

Bidding Specifications Not Available.

Lincat reserves the right to modify specifications or discontinue models without incurring obligation. Dimensions nominal.

Document Auto-Generated January 23, 2024









**MODEL: ESLR6C** 

### **TECHNICAL DRAWING**

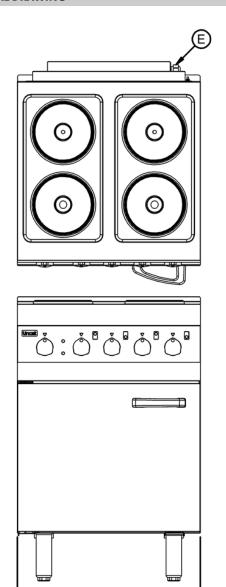

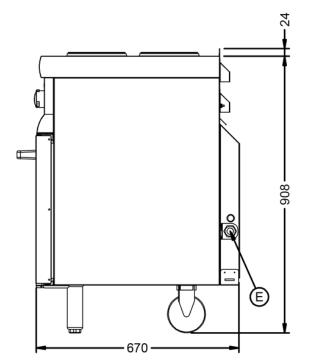

Lincat reserves the right to modify specifications or discontinue models without incurring obligation. Dimensions nominal.

600

Document Auto-Generated January 23, 2024

