DISHWASHER P-50B 230/50/1 DD (WITH DRAIN PUMP)

500x500mm. racks. Max. loading height: 330mm.

P/N 1302083





SALES DESCRIPTION

Professional Washing with Total Guarantee.

- ✓ User-friendly.
- ✓ Optimal washing results.
- Sturdy and reliable.
- √ Stainless steel, sturdy and resistant washing arms. Don't get damaged because of chemical corrosion.
- √ 2.5 kW tank element: optimal recovery time.

FEATURES AND BENEFITS

- √ For washing glasses, cups, cutlery and small plates.
- √ Washing with double system of rotating dispersers (top and) bottom).
- √ 1 wash cycle.
- √ Manufactured from catering grade AISI 304 2B stainless steel and incorporating top quality components.
- Double skinned door with high efficiency seal, ensuring thermal and acoustic insulation. Magnetic door micro-switch.
- Precision positioned water jets guarantee optimum washing result for even the most stubbornly stained glasses. Easy to assemble, boltless rinse spray arms.
- ✓ Inside of the machine with rounded finished: absence of angles avoiding the accumulation of dirt.
- ✓ Automatic detergent and rinse aid dosing equipment.
- Sammic ware washers are designed for easy and fast on-site maintenance.
- √ 100% tested.

PLEASE NOTE:

Boiler: 2.800W / Total power: 3.170W up to March 2017 Boiler: 2.500W / Total power: 2.870W from March 2017

NCLUDES

- √ Rinse aid doser.
- √ Variable detergent dosing equipment.
- ✓ Drain pump with non-return
- valve
- √ 1 open basket.
- 1 mixed basket.
- √ 1 small cutlery basket.







www.sammic.co.uk

Food Service Equipment Manufacturer Unit 2, Trevanth Road Troon Industrial Park LE4 9LS - Leicester

uksales@sammic.com Tel.: +44 0116 246 1900



Project	Date
Item	Qty

Approved

P/N 1302083

DISHWASHER P-50B 230/50/1 DD (WITH DRAIN PUMP)

500x500mm. racks. Max. loading height: 330mm.

SPECIFICATIONS

Basket dimensions: 500 mm x 500 mm

Maximum glass height: 330 mm

Cycle duration: 180 "

Production baskets/hour: 20

Wash temperature: 0 °C - 65 °C

Rinse temperature: 0 °C - 90 °C

- √ Boiler capacity: 4.5 I
- √ Wash tank capacity: 26 I
- √ Water consumption/cycle: 3 I
- ✓ Electrical supply: 230 V / 50 Hz / 1 ~ (12.6)

Loading

- √ Pump: 370 W / 0.5 Hp
- √ Tank: 2500 W
- √ Boiler: 2800 W
- √ Total loading: 3170 W

External dimensions (WxDxH)


- √ Width:600 mm
- ✓ Depth: 630 mm
- ✓ Height: 835 mm


Net weight: 58.5 Kg

Crated dimensions

640 x 695 x 960 mm

Gross weight: 65 Kg.

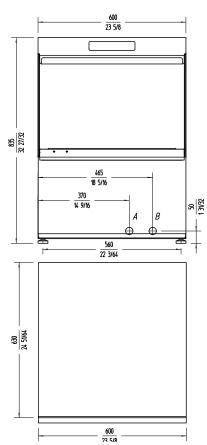



sammic

www.sammic.co.uk

Food Service Equipment Manufacturer Unit 2, Trevanth Road Troon Industrial Park LE4 9LS - Leicester

uksales@sammic.com Tel.: +44 0116 246 1900



Project	Date
Item	Qty

Approved