


Premier KG 60 C DR U

Glass door refrigerator



1/1 EN

ACCESSORIES INCLUDED

4 grey shelves (400 x 600mm) Pedal door opener with overload protection

OPTIONAL ACCESSORIES

Set of legs 130-180mm
 Grey shelf with back guard
 Grey bottom shelf with back guard
 Stainless shelf with back guard
 Stainless bottom shelf with back guard
 Set of 4 stainless shelves with back guard
 Set of 2 rail for EN 1/1 cabinet U shape
 Master key

PRODUCT SERIES: PREMIER
 ITEM NUMBER: 184602030
 COUNTRY OF ORIGIN: TURKEY

Hoshizaki Premier KG 60 C DR is a glass door refrigerator suitable for the Euronorm 1/1 system (400 x 600 mm) with a net usable volume of 335 ltr. ranking B in energy efficiency class. It has a cabinet height of 2075mm and depth of 848mm without pedal door opener (depth of 920mm incl. pedal door opener).

- Ventilated refrigeration system
- Air circulation system
- Automatic fan cut-out when door is opened
- Automatic defrost with re-evaporation of defrost water
- Heavy duty cabinet
- Climate class 5 cooling system enduring up to +40°C ambient temperature
- Exterior and interior of stainless steel AISI 304
- Stainless steel wall rails and adjustable shelf supports
- Internal LED lighting
- Right hand hinged reversible door
- Automatic door closing
- Door lock
- Removable magnetic door gaskets
- Pedal door opener with overload protection (included as accessory)
- Pan-shaped inside base with rounded corners to catch fluids
- Low sound level
- IP21 water protection
- Matching design identity as the Premier counters

WARRANTY PERIOD

6 Years on Parts & Labour

EXTERIOR

Stainless steel AISI 304

INTERIOR

Stainless steel AISI 304

Refrigerant: R600a / Refrigerant (kg): 0.08 / CO2 equivalent (kg): 0.24

CERTIFICATIONS



Energy Consumption (kWh/Year)	Energy Efficiency Class	Energy Efficiency Class Standard	Energy Efficiency Index EEI
373	B	ISO 22041-2019	32.2



HOSHIZAKI

Premier KG 60 C DR U





TECHNICAL SPECIFICATIONS

Temperature Range	GN or Tray Size (mm)	Volume, Gross (ltr.)	Net Usable Volume (ltr.)	Power Supply	Connection Load (Watt)	Ref. capacity at -10°C (Watt)	Climate Class	Sound Level – dB(A)
+2/+12°C	Shelf Euronorm 400x600mm Suitable for 1/1 EN system	480	335	230V, 50 Hz	120	206	4 (max. ambient temp. of 30 °C with 55% RH)	46

SHIPPING SPECIFICATIONS

Dimensions W x D x H (mm)	Net Weight (kg)	Dimensions, Packed, W x D x H (mm)	Weight, Packed (kg)	Volume Packed (m3)
610 x 848 x 2075 (including castors)	115	670 x 880 x 2150	125	1.26

Disclaimer: Every effort has been made to ensure that the information contained in this spec sheet is accurate at the time of publishing. Hoshizaki Europe BV assumes no responsibility or liability for typographical errors or omissions or for any misinterpretation of the information within the publication and reserves the right to change without notice.

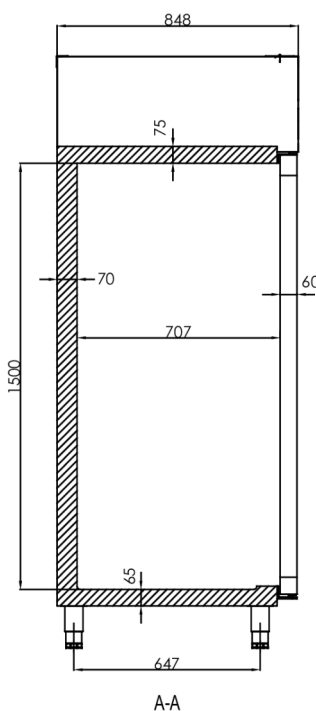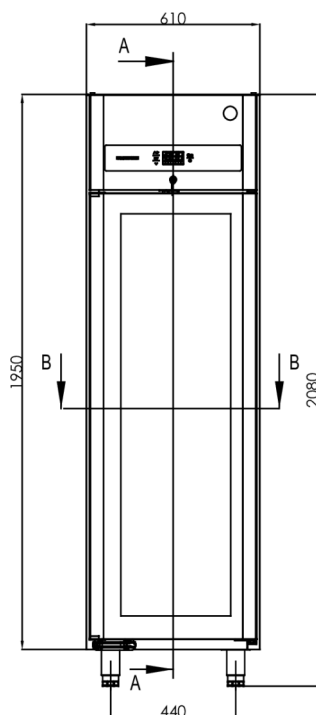

HOSHIZAKI

Hoshizaki Belgium
Hoshizaki Danmark
Hoshizaki Deutschland
Hoshizaki France
Hoshizaki Iberia
Hoshizaki Italia
Hoshizaki Middle East

info@hoshizaki.nl
info@hoshizaki.dk
vertrieb@hoshizaki.de
info@hoshizaki.fr
info@hoshizaki.es
commerciale@hoshizaki.it
sales.ex@hoshizaki-europe.com

Hoshizaki Netherlands
Hoshizaki Norge
Hoshizaki Sverige
Hoshizaki UK
Export countries
Other countries

info@hoshizaki.nl
salg@hoshizaki.no
orderSE@hoshizaki.dk
uksales@hoshizaki.uk
sales.ex@hoshizaki-europe.com
sales.ex@hoshizaki-europe.com

www.hoshizaki.uk