



## Model


MP60

## Product Description

Planetary Mixer, 60 litre, Extra Heavy Duty


## Product Code

5MP60-3PH



## Standard Features

- Extra heavy duty 60ltr, floor standing, gear driven, planetary mixer
- Particularly suitable for bakeries, hotels, restaurants, canteens etc
- Easy to operate
- Planetary mixing action ensures perfect results
- High torque motor allows mixing of stiffer doughs and larger batches
- 4 fixed speeds: 84, 148, 248 and 436 rpm
- Easy speed-shifting
- Timer
- Emergency stop button
- Stainless steel safety guard with ingredient chute and automatic shut-off when guard is opened at any speed
- Interlocking bowl guard and bowl lift
- Dual bowl clamps to lock bowl down
- Resettable thermal overload protection (NVR device)
- Long lasting lubricant providing abrasion resistant transmission
- Transmission gears are made of heat treated, hardened steel
- Heavy-duty, cast-iron frame
- Non-slip rubber feet
- Quiet operation
- Heavy duty gearbox
- Industry standard #12 attachment hub
- Covered by Metcalfe 3-year warranty (1<sup>st</sup> year parts and labour, 2<sup>nd</sup> & 3<sup>rd</sup> years parts only) and full after sales service

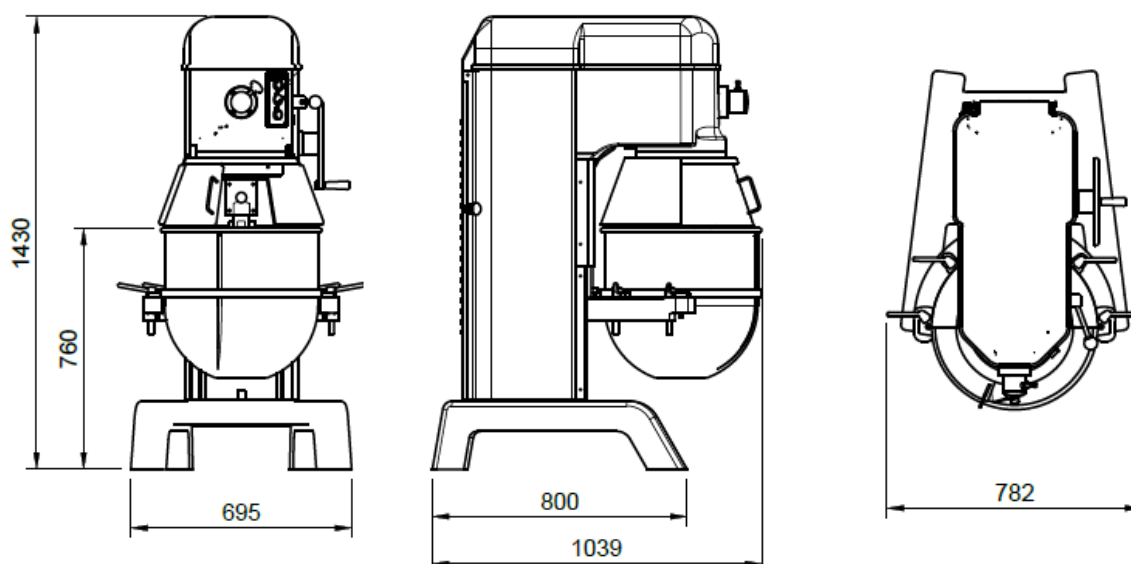

## Specifications

|                                   |                                                                                                                                                                                  |
|-----------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Model                             | MP60                                                                                                                                                                             |
| Product Code                      | 5MP60-3PH                                                                                                                                                                        |
| Bowl Capacity (l)                 | 60                                                                                                                                                                               |
| Duty                              | Extra heavy duty                                                                                                                                                                 |
| Speed (rpm)                       | 4 fixed speeds<br>84 / 148 / 248 / 436                                                                                                                                           |
| Belt or Gear Driven               | Gear driven                                                                                                                                                                      |
| Location                          | Freestanding                                                                                                                                                                     |
| Attachment Hub                    | Yes                                                                                                                                                                              |
| Timer                             | Yes (15 min)                                                                                                                                                                     |
| Phase (Ø)                         | Three                                                                                                                                                                            |
| Voltage (V)                       | 400                                                                                                                                                                              |
| Frequency (Hz)                    | 50                                                                                                                                                                               |
| Current (Amp)                     | 5.3                                                                                                                                                                              |
| Power (kW / hp)                   | 2.25 / 3                                                                                                                                                                         |
| Power Connection                  | Hardwired (fitted to a switched isolator, capable of supporting an electrical load of 32amps, which is fused with a C or D rated breaker) see user instructions for full details |
| Items Included                    | Bowl (MP11091-12-008)<br>Beater (MP11091-12-001)<br>Dough Hook (MP11091-12-003)<br>Whisk (MP11091-12-002)<br>Bowl Trolley (MP11091-12-011)                                       |
| Optional Accessories              | 30ltr reduction bowl (MP11091-12-007)<br>30ltr reduction beater (MP11091-12-004)<br>30ltr reduction dough hook (MP11091-12-006)<br>30ltr reduction whisk (MP11091-12-005)        |
| Overall Dimensions D x W x H (mm) | 1039 x 782 x 1430                                                                                                                                                                |
| Net Weight (Kg)                   | 455                                                                                                                                                                              |
| Packed Dimensions D x W x H (mm)  | 1150 x 790 x 1680                                                                                                                                                                |
| Packed Weight (Kg)                | 480                                                                                                                                                                              |
| Volume (m3)                       | 1.526                                                                                                                                                                            |
| Warranty                          | 3 year (1 <sup>st</sup> year parts and labour, 2 <sup>nd</sup> & 3 <sup>rd</sup> years parts only)                                                                               |

**Note:** The minimum requirement for all electrical equipment's correct operation is an air temperature of between +5°C and +40°C. Mixers should not be operated in a cold store.

We reserve the right to alter the specification and technical details for this item at any time without prior notice.

5/2026

**Metcalf Catering Equipment Ltd**

Haygarth Park  
Blaenau Ffestiniog  
Gwynedd, LL41 3PF

