



Cabinet Solutions

Cafeterias • Convenience Stores
Catering • Concessions



FDWD-2X with 4-shelf multi-purpose rack
pg. 2



FSDT-1 with 4-tier circle racks, optional sign holders (signs not included) and accessory food pans
pg. 3



WFST-2X with a 4-shelf multi-purpose rack
pg. 7



MVW-12-4 pg. 8



MDW-1X with standard *Designer* color and hood with backlit sign cut out on one side (sign included)
pg. 9



FST-1-MN shown in standard Bronze
pg. 10



FSHC-6W1 with accessory food pans
pg. 13



FSHC-17W1 with accessory food pans
pg. 15



FS2HAC-2PT Pass-through style with accessory food pans
pg. 17



Flav-R-Fresh® Humidified Impulse Display Cabinets

A profitable way to create impulse food sales is with the small Flav-R-Fresh® Holding and Display Cabinet. Using controlled moisturized heat allows you to showcase your product longer using minimum counter space.

- Full-view display with tempered glass sides and door
- Controlled heat and humidity for longer holding times
- Accommodates half-size sheet pans
- Revolving or stationary display racks
- Single- or reversible double-sided opening models
- Fluorescent lights illuminate the holding areas and emphasize the product



FDWD-2 with accessory 4-tier circle rack

IMPULSE CABINETS

Model* [†]	Description [°]	Dimensions W x D x H (Height includes standard 25mm [1"] legs)	Watts	Ship Weight
FDWD-1	1 Door w/4-Tier Circle Rack w/Motor	492 x 530 x 727 mm (19 ³ / ₈ " x 20 ⁷ / ₈ " x 28 ⁵ / ₈ "	1440	41 kg (90 lbs.)
FDWD-1X	1 Door w/4-Shelf Multi-Purpose Rack w/o Motor	492 x 530 x 727 mm (19 ³ / ₈ " x 20 ⁷ / ₈ " x 28 ⁵ / ₈ "	1440	41 kg (90 lbs.)
FDWD-2	2 Doors w/4-Tier Circle Rack w/Motor	492 x 559 x 727 mm (19 ³ / ₈ " x 22" x 28 ⁵ / ₈ "	1440	41 kg (90 lbs.)
FDWD-2X	2 Doors w/4-Shelf Multi-Purpose Rack w/o Motor	492 x 559 x 727 mm (19 ³ / ₈ " x 22" x 28 ⁵ / ₈ "	1440	41 kg (90 lbs.)

[†] 220V, 240V available with CE Mark.

[•] Models FDWD-1 and FDWD-2 include rack motor. Models with "X" designator do not have revolving display and are NOT available for retrofit.

[°] Rack listed is included with unit. Other racks available.

[°] Non-humidified cabinet available. Unit will only operate in dry mode.

All Impulse Cabinet Models Feature:

Voltage: 120, 60Hz; and 220 or 240, 50Hz.

Cabinet Opening: 400 W x 502 H mm (15³/₄" x 19³/₄".)

Door Hinges: Control Side: Left-hand side.


Customer Side (Two-Door Models Only): Right-hand side.

Max. Pizza Size: 381 mm (15") diameter.

Water Tank Capacity for Humidity System: 2 liters (1/2 gallon).

Cord Location: Facing controls, left-hand side panel, lower right corner.

ALL FLAV-R-FAVOR® METAL-SHEATHED AIR HEATING ELEMENTS WARRANTED AGAINST BURNOUT AND BREAKAGE FOR TWO (2) YEARS.

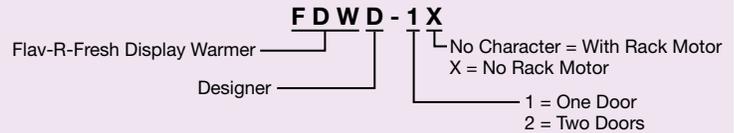

WATER QUALITY REQUIREMENTS – PAGE 18

OPTIONS (available at time of purchase only)

Designer Colors – Non-standard colors are non-returnable – Clear Anodized Aluminum Standard –

RED	Warm Red
BLACK	Black
GRAY	Gray Granite
WHITE	White Granite
NAVY	Navy Blue
GREEN	Hunter Green
COPPER	Antique Copper
FDWD-SCD	Self-Closing Door in lieu of standard Door (left hinge only). Must upgrade both Doors on FDWD-2, -2X (not field reversible)
FDWD-6FRT	152 mm (6") Merchandising Display Sign Holder for Control Side only (includes Metal Holder only). Available in all Designer Colors to match your unit (Black is standard). Adds 29 mm (1 ¹ / ₈ ") to height of unit. Requires one (1) Sign – 484 W x 83 H x 2 D mm (19 ⁵ / ₁₆ " W x 6 ³ / ₁₆ " H x 1 ¹ / ₁₆ " D) – not included
FDWD-DIS	76 mm (3") One-Sided Merchandising Display Sign Holder (includes Metal Holder and Window) – one per side, three maximum. Available in all Designer Colors to match your unit (Black is standard). Adds 32 mm (1 ¹ / ₄ ") to height of unit. Requires one (1) Sign – 491 W x 160 H x 2D mm (19 ⁷ / ₁₆ " W x 3 ³ / ₄ " H x 1 ¹ / ₁₆ " D) – not included
FDWD-6SIGN	162 mm (6 ³ / ₈ ") One-Sided Merchandising Display Sign Holder (includes Metal Holder and Window) – one per side, three maximum. Available in all Designer Colors to match your unit (Black is standard). Adds 32 mm (1 ¹ / ₄ ") to height of unit. Requires one (1) Sign – 491 W x 157 H x 1.59 D mm (19 ⁵ / ₁₆ " x 6 ¹ / ₄ " x 1 ¹ / ₁₆ ") – not included

ACCESSORIES (available for purchase at any time)

FDWD-LEGS	102 mm (4") Adjustable Legs (102-127 mm [4"-5"])
COUPLING	Motorless Rack Coupling for FDWD-1X and FDWD-2X models (select Circle Rack or Pretzel Tree)
FDWD4TCRR	4-Tier Circle Rack with Pizza Pan Retainers (requires Coupling for -1X or -2X models)
FDW4SMP	4-Shelf Multi-Purpose Rack (each shelf – 346 W x 321 D mm [13 ⁵ / ₈ " x 12 ⁵ / ₈ "])
FDW3TPT	3-Tier Pretzel Tree (requires Coupling for -1X or -2X models)

DECORATIVE KIT – PAGE 5

RACKS – PAGE 6

FOOD PANS AND TRIVETS – PAGE 18

COLORS AND FINISHES – PAGE 18



COUPLING Accessory

Flav-R-Savor® Humidified Holding & Display Cabinets

Balancing a precise combination of heat and humidity, the Hatco Flav-R-Savor® Cabinets provide an attractive showcase for hot food displays and generate impulse sales. A complete range of cabinet sizes, door options and rack types allows for perfect merchandising of food products such as pizza, fried foods, bakery items, sandwiches and more.

- Full-view display with tempered glass sides and door provide maximum heat retention
- Controlled heat and humidity for longer holding times
- 3 liter (¾) gallon stainless water reservoir provides all day moisture
- Low-water protection prevents heating element burnout and alerts operator to low-water condition
- Revolving or stationary display racks
- Available in two heights with single-sided or double-sided openings
- Fluorescent lights with clear plastic cover help showcase food product

FSD-1 with 3-tier circle rack and optional mechanical controls



FSDT-2 with 4-tier circle rack, 102 mm (4") legs, optional Designer Black color and accessory food pans



DISPLAY CABINETS

Model*†‡	Description°	Dimensions W x D x H	Cabinet Opening Dimensions W x H	Ship Weight
Standard				
FSD-1	1 Door w/3-Tier Circle Rack w/Motor	569 x 612 x 699 mm (22½" x 24⅛" x 27⅝")	483 x 473 mm (19" x 18⅝")	50 kg (110 lbs.)
FSD-1X	1 Door w/3-Tier Pan Rack w/o Motor	569 x 612 x 699 mm (22½" x 24⅛" x 27⅝")	483 x 473 mm (19" x 18⅝")	50 kg (110 lbs.)
FSD-2	2 Doors w/3-Tier Circle Rack w/Motor	569 x 642 x 699 mm (22½" x 25⅜" x 27⅝")	483 x 473 mm (19" x 18⅝")	52 kg (114 lbs.)
FSD-2X	2 Doors w/3-Tier Pan Rack w/o Motor	569 x 642 x 699 mm (22½" x 25⅜" x 27⅝")	483 x 473 mm (19" x 18⅝")	51 kg (112 lbs.)
Tall				
FSDT-1	1 Door w/4-Tier Circle Rack w/Motor	569 x 612 x 826 mm (22½" x 24⅛" x 32⅝")	483 x 603 mm (19" x 23¾")	54 kg (118 lbs.)
FSDT-1X	1 Door w/4-Tier Pan Rack w/o Motor	569 x 612 x 826 mm (22½" x 24⅛" x 32⅝")	483 x 603 mm (19" x 23¾")	54 kg (118 lbs.)
FSDT-2	2 Doors w/4-Tier Circle Rack w/Motor	569 x 642 x 826 mm (22½" x 25⅜" x 32⅝")	483 x 603 mm (19" x 23¾")	55 kg (122 lbs.)
FSDT-2X	2 Doors w/4-Tier Pan Rack w/o Motor	569 x 642 x 826 mm (22½" x 25⅜" x 32⅝")	483 x 603 mm (19" x 23¾")	52 kg (114 lbs.)

† 220V, 240V available with CE Mark.

‡ Models FSD-1, FSD-2, FSDT-1 and FSDT-2 include rack motor. Models with "X" designator do not have revolving display and are NOT available for retrofit.

° Rack listed is included with unit. Other racks available.

‡ Non-humidified cabinet available. Unit will only operate in dry mode.

All Display Cabinet Models Feature:

Voltage: 120, 60Hz; and 220 or 240, 50Hz, 1440 watts.

Cabinet Opening Dimensions: Standard Models: 19"W x 18⅝"H.

Tall Models: 19"W x 23¾"H.

Door Hinges: Control Side: Left-hand side.

Customer Side (Two-Door Models Only): Right-hand side.

Max. Pan Size: 482 mm (19") diameter.

Water Tank Capacity for Humidity System: 3 liters (¾ gallon).

Cord Location: Facing controls, left-hand side panel, lower right corner.



OPTIONS AND ACCESSORIES – PAGE 4

DECORATIVE KIT – PAGE 5

RACKS – PAGE 6

WATER QUALITY REQUIREMENTS – PAGE 18

ALL FLAV-R-SAVOR® METAL-SHEATHED AIR HEATING ELEMENTS WARRANTED AGAINST BURNOUT AND BREAKAGE FOR TWO (2) YEARS.

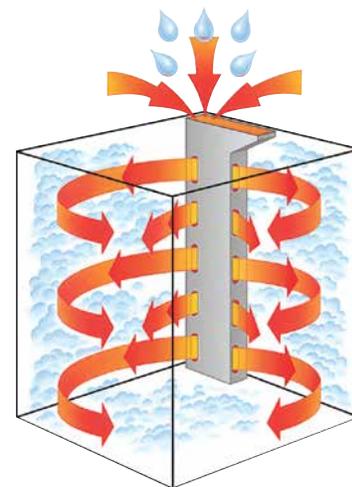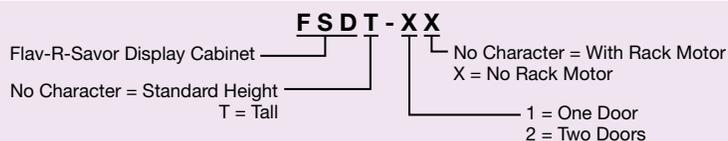

CONTROLLED MOISTURIZED HEAT KEEPS HOT FOODS FRESH LONGER Hatco's Flav-R-Savor® air flow pattern is designed to maintain consistent cabinet temperature without drying out foods. The precise combination of heat and humidity creates a "blanket" effect around the food. The air flow rate enables the cabinet to recover temperature rapidly after opening and closing the door.



Two FSDT-1 with 4-tier circle racks, optional sign holders (signs not included) and accessory food pans

OPTIONS (available at time of purchase only)

Designer Colors – Non-standard colors are non-returnable – Clear Anodized Aluminum Standard –

RED	Warm Red
BLACK	Black
GRAY	Gray Granite
WHITE	White Granite
NAVY	Navy Blue
GREEN	Hunter Green
COPPER	Antique Copper
THERM	Mechanical Controls
FSD7SIGN	191 mm (7½") Merchandising Display Sign Holder (includes Metal Holder and Window) – one per side , three maximum. Available in all <i>Designer Colors</i> to match your unit (Black is standard). Adds 32 mm (1¼") to height of unit. Requires one (1) Sign – 572 W x 191 H x 2 D (22½" x 7½" x ¼") – not included

ACCESSORIES (available for purchase at any time)

F-LEGS-4	102 mm (4") Adjustable Legs
COUPLING	Motorless Rack Coupling for FSD-1X, FSD-2X, FSDT-1X and FSDT-2X models (select appropriate Circle Rack or Pretzel Tree)
Racks – FSD only –	
FSD5SMP	5-Shelf Multi-Purpose Rack (each shelf – 457 W x 406 D mm [18" x 16"])
FSD3TCR	3-Tier Circle Rack with Pizza Pan Retainers (requires Coupling for -1X or -2X models)
FSD3TPR	3-Tier Pan Rack (accommodates Half-Size Sheet Pans – not included)
Racks – FSDT only –	
FSD7SMP	7-Shelf Multi-Purpose Rack (each shelf – 457 W x 406 D mm [18" x 16"])
FSDT4TCR	4-Tier Circle Rack with Pizza Pan Retainers (requires Coupling for -1X or -2X models)
FSDT5TCR	5-Tier Circle Rack with Pizza Pan Retainers (requires Coupling for -1X or -2X models)
FSDT4TPR	4-Tier Pan Rack (accommodates Half-Size Sheet Pans – not included)
FSDT3SAR	3-Shelf Angle Rack (15° angle shelves). Each shelf – 457 W x 413 D mm (18" x 16¼")
FSDT3TPT	3-Tier Pretzel Tree (requires Coupling for -1X or -2X models)

DECORATIVE KIT – PAGE 5

RACKS – PAGE 6

FOOD PANS AND TRIVETS – PAGE 18

COLORS AND FINISHES – PAGE 18

Flav-R-Savor® Decorative Kit for FDWD, FSD, FSDT models only

Transform your Hatco Flav-R-Savor® Holding & Display Cabinet from a "heated box" into a *Designer Merchandiser* with a variety of simple accessory additions. Create a new look and feel to your decór.

- The curved hinged header allows easy access to controls and water fill cup, and gives a great area to brand your food product with a magnetic sign (sign not included)
- All decorative pieces come standard in *Designer* Black powdercoat, with additional *Designer* colors available
- Curved inset panels enhance the overall look
- The base skirt completes the transformation and gives an additional branding area. Available in flat or curved panels for front and/or back of unit
- Signs not included



FSDT-1 with 4-tier circle rack and full Decorative Kit (signs not included)

OPTIONS (available at time of purchase only – additional lead time required)

Designer Colors – Non-standard colors are non-returnable – Black Standard –

RED	WR	Warm Red
BLACK	BK	Black
GRAY	GG	Gray Granite
WHITE	WG	White Granite
NAVY	NB	Navy Blue
GREEN	HG	Hunter Green
COPPER	AC	Antique Copper

ACCESSORIES (available for purchase at any time)

Side Insets – Must choose Designer Color – Black Standard –

FSD-INSET1 ②	Two (2) Crescent Inset Panels for FSD models
FSD-INSET2 ②	Two (2) Wave Inset Panels for FSD models
FSDT-INSET1 ②	Two (2) Crescent Inset Panels for FSDT models
FSDT-INSET2 ②	Two (2) Wave Inset Panels for FSDT models
FDWD-INSET1 ②	Two (2) Crescent Inset Panels for FDWD models
FDWD-INSET2 ②	Two (2) Wave Inset Panels for FDWD models


Top Covers – Must choose Designer Color – Black Standard –

FSD-CTLH ①	Curved Hinged Header on control side for FSD and FSDT models
FDWD-CTLH ①	Curved Hinged Header on control side for FDWD models
FSD-CUSH ②	Curved Header on non-control side for FSD and FSDT models
FDWD-CUSH ②	Curved Header on non-control side for FDWD models

Base Skirts – Requires 4" Adjustable Legs (not included) – Must choose Designer Color – Black Standard –

FSD-SQB ③④⑦	One (1) Flat Front Panel, two (2) Flat Side Panels and one (1) Flat Back Panel for FSD and FSDT models
FDWD-SQB ③④⑦	One (1) Flat Front Panel, two (2) Flat Side Panels and one (1) Flat Back Panel for FDWD models
FSD-1CB ③④⑦	One (1) Curved Front Panel, two (2) Flat Side Panels and one (1) Flat Back Panel for FSD and FSDT models
FDWD-1CB ③④⑦	One (1) Curved Front Panel, two (2) Flat Side Panels and one (1) Flat Back Panel for FDWD models
FSD-2CB ③④④	One (1) Curved Front Panel, two (2) Flat Side Panels and one (1) Curved Back Panel for FSD and FSDT models
FDWD-2CB ③④④	One (1) Curved Front Panel, two (2) Flat Side Panels and one (1) Curved Back Panel for FDWD models
F-LEGS-4	102 mm (4") Adjustable Legs for FSD and FSDT models
FDWD-LEGS	102 mm (4") Adjustable Legs for FDWD models


COLORS AND FINISHES – PAGE 18

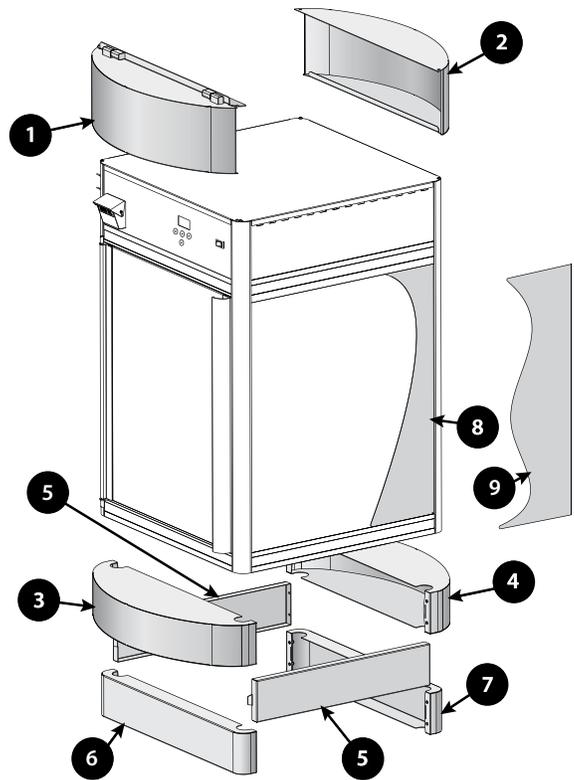




Display Rack Selections


Racks For FDWD Models (Page 2)

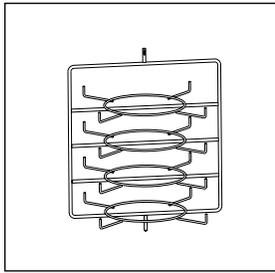

**4-Tier Circle Rack
FDWD4TCRR**
(Max. 381 mm [15"] dia. pans)
(383 mm [15 1/4"] opening)

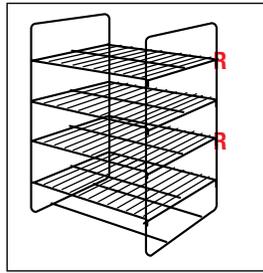


**4-Shelf Multi-Purpose
Rack FDW4SMP**
(Max. 457 x 330 mm
[18" x 13"] Half-Size Sheet
Pans – FDWD-2X only)
(95 mm [3 3/4"] opening)

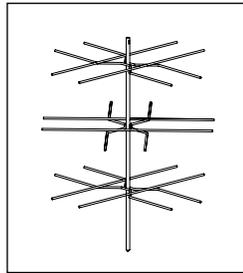


**3-Tier Pretzel Tree
FDW3TPT**
(149 mm [5 7/8"] opening)


Racks For FSD/FSDT Models (Page 3)

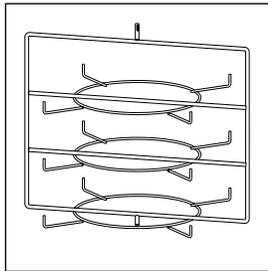


**FSD 3-Tier Circle Rack
FSD3TCR**
(117 mm [4 5/8"] opening)

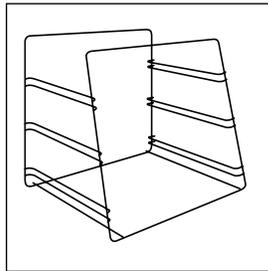


**FSD 3-Tier Pan Rack
FSD3TPR**
(89 mm [3 1/2"] opening)

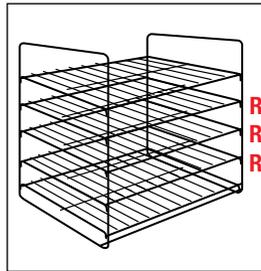


**FSD 5-Shelf Multi-Purpose
Rack FSD5SMP**
(64 mm [2 1/2"] opening)

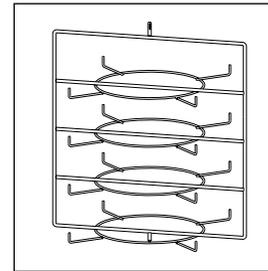


**FSDT 4-Tier Circle Rack
FSDT4TCR**
(Max. 483 mm [19"] dia.
pans) (117 mm [4 5/8"]
opening)

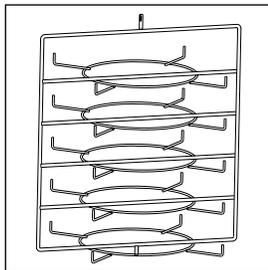


**FSDT 5-Tier Circle Rack
FSDT5TCR**
(Max. 483 mm [19"] dia.
pans) (98 mm [3 7/8"]
opening)

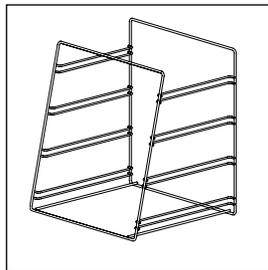


**FSDT 4-Tier Pan Rack
FSDT4TPR**
(Max. 457 x 330 mm [18" x
13"] Half-Size Sheet Pans) (89
mm [3 1/2"] opening)

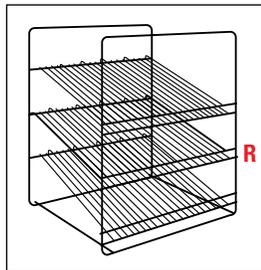

**FSDT 3-Shelf Angle
Rack FSDT3SAR**
(89 mm [3 1/2"] opening)

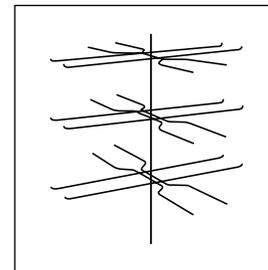

**FSDT 3-Tier Pretzel
Tree FSDT3TPT**
(149 mm [5 7/8"] opening)

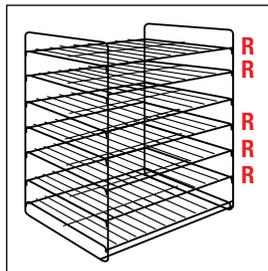

**FSDT 7-Shelf Multi-Purpose
Rack FSDT7SMP**
(Max. 457 x 330 mm [18" x
13"] Half-Size Sheet Pans)
(64 mm [2 1/2"] opening)

R Removable Shelves

Flav-R-Savor® Humidified Large Capacity Display Cabinets

Hatco Large Capacity Holding Cabinets hold more product at proper serving temperatures than standard size models. This allows for food to be prepared in advance of peak serving periods, while placing product in full-view cabinets to increase impulse sales.

- Countertop cabinets with self-closing (WFST-2X model) French-style glass doors
- Full-view display with tempered glass sides and incandescent lights to illuminate holding area
- Multi-purpose display rack included
- 3 liter (¾ gallon) stainless water reservoir provides moisture
- Perfect for large quantities of wrapped or boxed food
- Self-closing sliding doors, self-closing French doors, halogen bulbs and 102 mm (4") adjustable legs available



WFST-1X with a 4-shelf multi-purpose rack (decals and food pans not included)



WFST-2X with a 4-shelf multi-purpose rack, optional Designer color, self-closing sliding doors, and accessory food pans and 102 mm (4") legs

WIDE HOLDING CABINETS

Model†	Bulbs	Description	Dimensions W x D x H	Hz	Watts	Ship Weight
WFST-1X	4	2 Doors w/4-Shelf Rack	814 x 641 x 831 mm (32 1/8" x 25 1/4" x 32 3/4")	50/60	1790	83 kg (182 lbs.)
WFST-2X	4	4 Doors w/4-Shelf Rack	814 x 703 x 831 mm (32 1/8" x 27 5/8" x 32 3/4")	50/60	1790	85 kg (188 lbs.)

† 220V, 240V not available with CE Mark.

All Wide Holding Cabinet Models Feature:

Voltage: 120, 220 or 240, single phase.

Cabinet Opening Dimensions: 711 W x 557 H mm (28" x 21 7/8").

Available Shelf Space: 666 W x 501 D mm (26 1/4" x 19 3/4"). Holds one (1) full-size sheet pan per shelf.

Water Tank Capacity for Humidity System: 3 liters (¾ gallon).

Cord Location: Facing controls, left-hand side panel, lower right corner.

WATER QUALITY REQUIREMENTS – PAGE 18

OPTIONS (available at time of purchase only)

Designer Colors – Non-standard colors are non-returnable – Clear Anodized Aluminum Standard –


RED	Warm Red
BLACK	Black
GRAY	Gray Granite
WHITE	White Granite
NAVY	Navy Blue
GREEN	Hunter Green
COPPER	Antique Copper
1SLIDE-DR	Self-Closing Sliding Doors in lieu of standard Hinged Doors on one side only (WFST-2X only)
FRSELFCLSE	Self-Closing French Doors

ACCESSORIES (available for purchase at any time)

FSTCR-LEG	102 mm (4") Adjustable Legs
-----------	-----------------------------

FOOD PANS AND TRIVETS – PAGE 18

COLORS AND FINISHES – PAGE 18

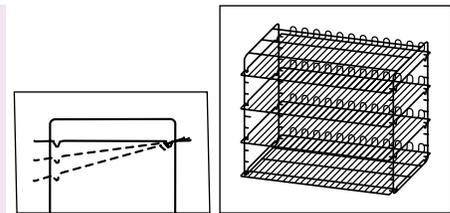

WFST 4-Shelf
Multi-Purpose Rack
Adjustable shelves
in 51 mm (2") increments

ALL FLAV-R-SAVOR® METAL-SHEATHED AIR HEATING ELEMENTS
WARRANTED AGAINST BURNOUT AND BREAKAGE FOR TWO (2) YEARS.





Mini Vertical Warmer

Our answer to impulse point-of-sale demands. Hatco's patented Mini Vertical Warmer is small enough to set anywhere, keeping pre-packaged snacks warm, appealing and at your customer's fingertips. There's nothing better than a warm treat!

- Ability to connect up to eight (8) units side-by-side, while only utilizing one outlet connection
- Clear polycarbonate hinged cover lets you see product levels at a glance
- Adjustable thermostat on back of unit
- Accessory wall mount bracket saves on counter space and draws attention at eye level
- Great for merchandising warm snacks
- For pre-packaged, non-hazardous foods



MVW-12-4 shown with standard Designer Black exterior, optional Designer Black internal coating and two (2) accessory MVW-JUMPERPLUG to connect units together



MVW-12-4 with standard Designer Black exterior

MINI VERTICAL WARMER

Model	Dimensions W x D x H	Voltage Single Phase	Watts	Plug	Ship Weight
MVW-12-4	138 x 202 x 427 mm (5 1/2" x 8" x 16 7/8")	120	150	NEMA 5-15	8 kg (18 lbs.)

All Mini Vertical Warmer Models Feature:
Cord Location: Server's side, bottom right.

OPTIONS (available at time of purchase only)

Designer Color for Interior – Non-standard colors are non-returnable – Clear Anodized Aluminum Standard – BLACK Black

ACCESSORIES (available for purchase at any time)

MVW-INSERT	102 mm (4") wide Insert to adjust dispensing height
MVW-WALLMOUNT	Wall-Mounting Bracket in standard Designer Black with Toggle Bolts for drywall and Wood Screws for stud walls
MVW-JUMPERPLUG	610 mm (24") Jumper Plug to connect two (2) units

COLORS AND FINISHES – PAGE 18



MVW-WALLMOUNT Accessory

PARTS ONLY GUARANTEED FOR ONE (1) YEAR.



Mini Display Warmers

The Hatco Mini Display Warmer is perfect for cookies, pastries, wrapped or boxed sandwiches or any other product that does not require humidity. Hot air circulates throughout the entire cabinet, keeping food at safe serving temperatures. The small footprint takes up little of your valuable counterspace while merchandising your breakfast, lunch or dinner offerings.

- Magnetically adjustable shelves allow horizontal or slanted displays
- Tempered glass sides and incandescent light
- Thermostatic control with rocker switch
- Available as a 1- or 2-door pass-through model
- Doors may be field converted to any side
- Optional black hood with backlit graphic sign cutout that can be rotated in field to face any side (sign included)



MDW-1X with standard Designer color and optional hood with backlit sign cut out on one side (sign included)

MINI DISPLAY WARMERS - NON-HUMIDIFIED

Model	Description	Dimensions			Voltage†	Watts	Ship Weight
		W x D x H					
MDW-1X	1 Door w/3 Shelves	400 x 432 x 646 mm	(15¾" x 17" x 25½")	120, 230	510	21 kg (46 lbs.)	
MDW-2X	2 Doors w/3 Shelves	400 x 465 x 646 mm	(15¾" x 18¾" x 25½")	120, 230	510	24 kg (53 lbs.)	

† 230V available with CE Mark.

All Mini Display Warmer Models Feature:

Cabinet Opening Dimensions: 315 W x 396 H mm (12½" x 15½").

Door Hinges: Control Side: Left-hand side.

Customer Side (Two-Door Models Only): Right-hand side.

Cord Location: Facing controls, lower right corner.


OPTIONS (available at time of purchase only)

Designer Color for Posts, Base and Top Trim – Non-standard colors are non-returnable – Black Standard –

RED	Warm Red
GRAY	Gray Granite
WHITE	White Granite
NAVY	Navy Blue
GREEN	Hunter Green
COPPER	Antique Copper
BCKLIT-MDW	Hood with Backlit Sign cut out on one side – Black only (Sign included)

COLORS AND FINISHES – PAGE 18

ALL FLAV-R-SAVOR® METAL-SHEATHED AIR HEATING ELEMENTS WARRANTED AGAINST BURNOUT AND BREAKAGE FOR TWO (2) YEARS.

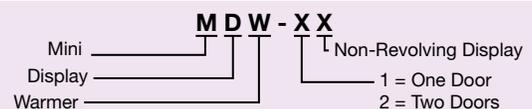



Macho Nacho® Chip Warmers

Keep your nacho chips hot, fresh and crisp with Hatco's Macho Nacho® Chip Warmer. This highly-visible heated merchandiser circulates air to prevent the loss of natural oils, eliminating the need to frequently replace stale chips.

- Keeps chips hot, fresh and crisp longer, reducing refill time and minimizing waste
- Specialty cabinets to hold and/or merchandise bulk nacho chips
- Special ductwork forces dry heat through chips from the bottom up
- Special two-door access for easy loading and serving
- 11 kg or 18 kg (25 lb. or 40 lb.) capacity
- Shatter-resistant incandescent lights illuminate the holding areas and emphasize the product



FDWD-1-MN



FST-1-MN shown in standard Bronze

CHIP WARMERS - NON-HUMIDIFIED

Model†	Dimensions W x D x H	Product Capacity	Watts	Ship Weight
FDWD-1-MN	492 x 607 x 728 mm (19 ³ / ₈ " x 23 ⁷ / ₈ " x 28 ³ / ₄ ")	11 kg (25 lbs.)	1129	46 kg (101 lbs.)
FST-1-MN	581 x 686 x 831 mm (22 ⁷ / ₈ " x 27" x 32 ³ / ₄ ")	18 kg (40 lbs.)	1245	60 kg (132 lbs.)

† CE Mark not available.

All Chip Warmer Models Feature:

Voltage: 120, 220 or 240.

Cabinet Opening: FDWD-1-MN: Upper Door: 416 W x 233 H mm (16³/₈"W x 9¹/₈").

Lower Door: 416 W x 230 H mm (16³/₈"W x 9").

FST-1-MN: Upper Door: 474 W x 286 H mm (18⁵/₈" x 11¹/₄").

Lower Door: 474 W x 252 H mm (18⁵/₈" x 9⁷/₈").

Decal Size: FDWD-1-MN: 423 W x 139 H mm (16⁵/₈"W x 5¹/₂").

FST-1-MN: 473 W x 152 H mm (18⁵/₈" x 6").

Cord Location: Facing controls, left-hand side panel, lower right corner.

ALL FLAV-R-SAVOR® METAL-SHEATHED AIR HEATING ELEMENTS
WARRANTED AGAINST BURNOUT AND BREAKAGE FOR TWO (2) YEARS.

XXXX - 1 - MN

FDWD = 11 kg (25 lbs.) Chip Capacity
FST = 18 kg (40 lbs.) Chip Capacity

Macho Nacho Unit
Single-Side Opening

Flav-R-Savor® Tall Non-Humidified Holding Cabinets

Be prepared to serve ready-to-go pizzas with Hatco's Flav-R-Savor® Tall Dry Holding Cabinets. An eight-shelf rack with 5" centers will hold a maximum of sixteen (16) boxed (457 Sq x 59 H mm [18" x 2⁵/₁₆"]) maximum) or eight (8) bagged pizzas.

- Great for boxed or bagged carryout pizzas
- Tempered glass throughout for excellent visibility, improving product rotation
- Even, constant cabinet temperatures with no humidity
- Two (2) 60 watt bulbs at the back top of the unit to illuminate product
- Units come with an eight-shelf rack, six of which are removable



PFST-2X with standard stainless steel 8-shelf rack



PFST-1XB with standard Smooth White 8-shelf rack

TALL HOLDING CABINETS - NON-HUMIDIFIED

Model†	Description	Dimensions W x D x H	Opening Dimensions W x H	Ship Weight
Standard				
PFST-1X	1 Door	581 x 635 x 1448 mm (22 ⁷ / ₈ " x 25" x 57")	476 W x 1026 H mm (18 ³ / ₄ " x 40 ³ / ₈ "	91 kg (200 lbs.)
PFST-2X	2 Doors	581 x 692 x 1448 mm (22 ⁷ / ₈ " x 27 ¹ / ₄ " x 57")	476 W x 1026 H mm (18 ³ / ₄ " x 40 ³ / ₈ "	94 kg (207 lbs.)
With Base				
PFST-1XB	1 Door	626 x 645 x 1775 mm (24 ³ / ₄ " x 25 ¹ / ₂ " x 70")	476 W x 1026 H mm (18 ³ / ₄ " x 40 ³ / ₈ "	117 kg (258 lbs.)

† 220V, 240V not available with CE Mark.

All Tall Non-Humidified Holding Cabinet Models Feature:

Models Shipped with: PFST-1X, -2X: Stainless steel body, an eight-shelf rack with six (6) removable shelves in standard stainless steel, a new latching handle, 127 mm (5") locking casters and a cord & plug set.

PFST-1XB: Solid back panel, stainless steel inside (with painted Glossy Gray on the outside), an eight-shelf rack with six (6) removable shelves in standard Smooth White, front and side sign holders painted Glossy Gray with flip-up side for access to controls (signs not included), 279 mm (11") high Designer Black base, a latching handle, 102 mm (4") locking casters and a cord & plug set.

Available Shelf Space: 457 square x 117 height mm (18" x 4⁵/₈").

Cord Location: Facing controls, left-hand side panel, lower right corner.

OPTIONS (available at time of purchase only)

Designer Color – Non-standard colors are non-returnable – Clear Anodized Aluminum Standard – 
BLACK Black

COLORS AND FINISHES – PAGE 18

ALL FLAV-R-SAVOR® METAL-SHEATHED AIR HEATING ELEMENTS WARRANTED AGAINST BURNOUT AND BREAKAGE FOR TWO (2) YEARS.





Flav-R-Savor® Portable Holding Cabinets

Hatco's energy efficient Flav-R-Savor® Portable Holding Cabinets will keep prepared foods at optimum serving temperatures for hours. The thermostatically-controlled heat and humidity allows food to be prepared in advance of peak serving periods.



FSHC-7W1-EE & FSHC-7W2-EE (120V models only) NOTE: Units equipped with a heavy-duty glass door(s) are not ENERGY STAR qualified

- Allows you to hold product longer while saving you money through increased energy efficiencies
- Electronic control with digital read out, temperature range of 27°- 93°C (80°- 200°F) and humidity controller
- The lower temperature range of 27°- 38°C (80°-100°F) can be used for proofing all types of breads
- All stainless steel interior
- No heating element in direct contact with water makes the unit easier to clean
- Accommodates Gastronorm pans
- Electrical components, controls and digital temperature readout are located at the top for easy access
- Comes in standard Designer Black or optional Stainless Steel – non-standard colors are non-returnable
- Stacking kit available
- Doors are field convertible from left to right



FSHC-7W1-EE shown in Designer Black, with optional bumper kit and right-hand hinged door

PORTABLE ENERGY EFFICIENT HOLDING CABINETS

Model	Description	Dimensions		Interior Cabinet Capacity		Ship Weight
		W x D x H		W x D		
FSHC-5W1-EE	Single Door	661 x 794 x 913 mm	(26 1/8" x 31 1/4" x 36")	532 x 676 mm	(20 7/8" x 26 7/8")	96 kg (212 lbs.)
FSHC-7W1-EE	Single Door	661 x 794 x 989 mm	(26 1/8" x 31 1/4" x 39")	532 x 676 mm	(20 7/8" x 26 7/8")	101 kg (222 lbs.)
FSHC-7W2-EE	2-Door Pass-Through	661 x 877 x 989 mm	(26 1/8" x 34 3/8" x 39")	532 x 676 mm	(20 7/8" x 26 7/8")	105 kg (232 lbs.)

All Portable Energy Efficient Holding Cabinet Models Feature:

Voltage: 120, 60Hz, 1118 watts, 9.3 amps; or 230, 50/60 Hz, 1182 watts, 5.1 amps.

Top Surface Dimensions: 654 W x 724 D mm (25 3/4" x 28 1/2").

Models Shipped with: A 1829 mm (6") cord and plug set, 102 mm (4") diameter casters (with 130 mm [5 1/8"] clearance), stainless steel heavy-duty door with left-hand door hinge and adjustable rack slides (seven [7] for the -7WX-EE units, and five [5] for the -5W1-EE unit).

Pan Capacity: -5WX-EE: Ten (10) full-sized sheet pans or 2/1 Gastronorm pans on 41 mm (1 5/8") spacing; five (5) full-sized sheet pans or 2/1 Gastronorm pans on 83 mm (3 1/4") spacing; twenty (20) full-sized hotel pans or 1/1 Gastronorm pans on 41 mm (1 5/8") spacing; ten (10) full-sized hotel pans or 1/1 Gastronorm pans on 83 mm (3 1/4") spacing.

-7WX-EE: Fourteen (14) full-sized sheet pans* or 2/1 Gastronorm pans on 35 mm (1 3/8") spacing; seven (7) full-sized sheet pans or 2/1 Gastronorm pans on 70 mm (2 3/4") spacing; fourteen (14) hotel sized pans or 1/1 Gastronorm pans on 35 mm (1 3/8") spacing.

Water Tank Capacity for Humidity System: 4 liters (1 gallon).

Cord Location: Back of unit, upper right side.

* With purchase of extra pan slides.

WATER QUALITY REQUIREMENTS – PAGE 18

ONE (1) YEAR ON-SITE PARTS WARRANTY, PLUS ONE (1) ADDITIONAL YEAR PARTS-ONLY WARRANTY ON ALL FLAV-R-SAVOR® METAL-SHEATHED AIR HEATING ELEMENTS.

OPTIONS (available at time of purchase only)

Colors (Side Panels) – Non-standard colors are non-returnable – Black standard – SS Stainless Steel

Colors (Top) – Non-standard colors are non-returnable – Black standard – SS Stainless Steel

EE-GLASS Glass Door in lieu of Stainless Steel Door (is not Energy Star qualified)

EE-LPCAST Low Profile Casters – FSHC-5W1-EE model only (deduct 57 mm [2 1/4"] from height)

EE-PLATFORM Platform for mounting directly on a counter in lieu of Casters (deduct 105 mm [4 1/8"] from height)


EE-STACK-BLK Designer Black Stacking Hardware mounted to bottom of Cabinet for two (2) FSHC-7W1 or two (2) FSHC-5W1 units in lieu of Casters (cannot have Legs on lower unit)

EE-STACK-SS Stainless Steel Stacking Hardware mounted to bottom of Cabinet for two (2) FSHC-7W1 or two (2) FSHC-5W1 units in lieu of Casters (cannot have Legs on lower unit)

EE-BUMPER Bumper Hardware – only for use with standard Casters (add 1/8" to height)

EE-4LEGS 102 mm (4") Legs in lieu of Casters (deduct 13 mm [1/2"] from height)

EE-6LEGS 152 mm (6") Legs in lieu of Casters (add 45 mm [1 3/4"] to height)

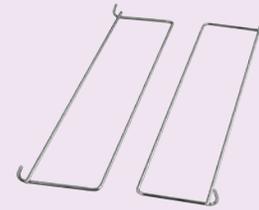

EE-1-SLIDE Accessory




ACCESSORIES (available for purchase at any time)

EE-1-SLIDE Extra Pan Slides

FOOD PANS AND TRIVETS – PAGE 18

COLORS AND FINISHES – PAGE 18

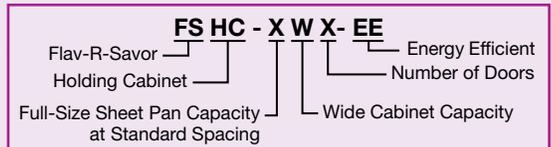

Flav-R-Savor® Low Profile, Humidified, Portable Holding Cabinets

Prepare food in advance of peak serving periods and safely hold it at optimum serving temperatures with the Flav-R-Savor® Portable Holding Cabinet. Thermostatically-controlled heat and humidity allows you to hold product for hours.

- Thermostatically-controlled heat and humidity holds hot food at optimum serving temperatures longer
- Allows preparation of food in advance of peak serving periods
- Accommodates Gastronorm pans
- Electrical components, controls, water reservoir and digital temperature readout are located at the top for easy access
- Reduced height – less than 762 mm (30") high, and wider footprint for increased capacity
- Insulated side walls, field reversible glass doors, large swivel casters with wheel locks and 6' recessed cord & plug set are standard
- Stacking kit available



FSHC-6W1 with accessory food pans

LOW PROFILE HOLDING CABINETS – HUMIDIFIED

Model†	Description	Dimensions (W x D x H) <i>Height includes standard casters</i>	Ship Weight
FSHC-6W1	1 Door	645 x 751 x 816 mm (25½" x 29½" x 32½")	76 kg (167 lbs.)
FSHC-6W2*	2 Doors	645 x 811 x 816 mm (25½" x 32" x 32½")	82 kg (180 lbs.)

† 220V, 240V available with CE Mark.

* FSHC-6W2 is a two-door pass-through single cabinet, not two units stacked.

All Low Profile Holding Cabinet Models Feature:

Voltage: 120, 60Hz; and 220 or 240, 50/60Hz, 1697 watts.

Cabinet Opening Dimensions: 546 W x 483 H mm (21½" x 19").

Top Surface Dimensions: 645 W x 657 D mm (25½" x 25½").

Models Shipped with: A 1829 mm (6') cord & plug set, 102 mm (4") diameter casters (with 130 mm [5½"] clearance) and six (6) sets of adjustable angle slides.

Pan Capacity: Six (6) 457 W x 660 D mm (18" x 26") sheet pans or six (6) ¼ Gastronorm pans on 76 mm (3") centers; eleven (11) 457 W x 660 D mm (18" x 26") sheet pans* or eleven (11) 2/1 Gastronorm pans on 38 mm (1½") centers*; or twelve (12) 508 W x 305 D x 64 H mm (20" x 12" x 2½") hotel pans*.

Water Tank Capacity for Humidity System: 3 liters (¾ gallon).

Cord Location: Back of unit, upper right side.

* With purchase of extra pan slides.

WATER QUALITY REQUIREMENTS – PAGE 18

OPTIONS (available at time of purchase only)

Colors (Side Panels) – Non-standard colors are non-returnable – Silver Gray Standard –

BLACK Designer Black

SS Stainless Steel

Colors (Top) – Non-standard colors are non-returnable – Silver Gray Standard –

BLACK Designer Black

SS Stainless Steel

6W-SS-DR Stainless Steel Door in lieu of Glass Door

HD-SS-DR Heavy-Duty Stainless Steel Door with Positive Latch Handle

6W1-LPCAST 51 mm (2") Low Profile Locking Casters in lieu of standard Casters (51 mm [2"] diameter with 76 mm [3"] clearance – overall height is 756 mm [29¾"])

6W1-STACK Silver Gray Stacking Hardware mounted to top of Cabinet for two (2) FSHC-6W1 units in lieu of Casters

CORDWIND Bracket for holding Cord during transport



ACCESSORIES (available for purchase at any time)

6W1-SLIDE Extra Pan Slides


FOOD PANS AND TRIVETS – PAGE 18 COLORS AND FINISHES – PAGE 18



6W1-SLIDE
Accessory

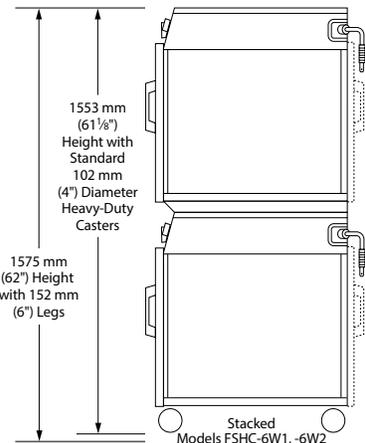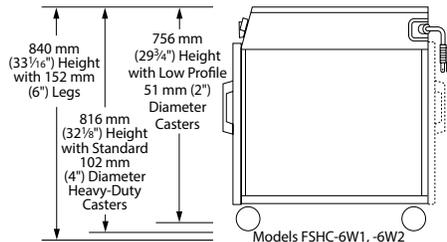

ALL FLAV-R-SAVOR® METAL-SHEATHED AIR HEATING ELEMENTS WARRANTED AGAINST BURNOUT AND BREAKAGE FOR TWO (2) YEARS.

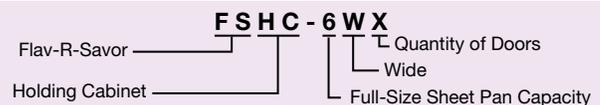



Flav-R-Savor® Humidified Portable Holding Cabinets

Prepare food in advance of peak serving periods and safely hold it at optimum serving temperatures with the Flav-R-Savor® Portable Holding Cabinet. Thermostatically-controlled heat and humidity allows you to hold product for hours.

- Thermostatically-controlled heat and humidity holds hot food at optimum serving temperatures longer
- Allows preparation of food in advance of peak serving periods
- Accommodates Gastronorm pans
- Electrical components, controls, water reservoir and digital temperature readout are located at the top for easy access

- Insulated side walls, field reversible glass doors, large swivel casters with wheel locks and a 1829 mm (6') recessed cord & plug set are standard
- Stacking kit available



FSHC-7-1 with standard 102 mm (4") casters and accessory food pans

PORTABLE HOLDING CABINETS – HUMIDIFIED

Model†	Description	Dimensions (W x D x H) Height includes standard casters	Ship Weight
FSHC-7-1	1 Door	578 x 753 x 892 mm (22¾" x 29¾" x 35½")	79 kg (175 lbs.)
FSHC-7-2*	2 Doors	578 x 812 x 892 mm (22¾" x 32" x 35½")	82 kg (180 lbs.)

† 220V, 240V available with CE Mark.

* FSHC-7W2 is a two-door pass-through single cabinet, not two units stacked.

All Portable Cabinet Models Feature:

Voltage: 120V, 60Hz; and 220 or 240, 50/60Hz, 1697 watts.

Cabinet Opening Dimensions: 470 W x 559 H mm (18½" x 22").

Top Surface Dimensions: 575 W x 657 H mm (22¾" x 25¾").

Models Shipped with: A 1829 mm (6') cord & plug set, 102 mm (4") diameter casters (with 130 mm [5½"] clearance) and seven (7) sets of adjustable angle slides for 457 x 660 mm (18" x 26") pans or 305 x 508 mm (12" x 20") pans.

Pan Capacity: Seven (7) 457 W x 660 D mm (18" x 26") sheet pans on 76 mm (3") centers, seven (7) 508 W x 305 D x 64 H mm (20" x 12" x 2½") hotel pans or seven (7) 1/1 Gastronorm pans.

Water Tank Capacity for Humidity System: 3 liters (¾ gallon).

Cord Location: Back of unit, upper right side.

WATER QUALITY REQUIREMENTS – PAGE 18

OPTIONS (available at time of purchase only)

Colors (Side Panels) – Non-standard colors are non-returnable – Silver Gray Standard –

BLACK	Designer Black
SS	Stainless Steel

Colors (Top) – Non-standard colors are non-returnable – Silver Gray Standard –

BLACK	Designer Black
SS	Stainless Steel
SS-DR	Stainless Steel Door in lieu of Glass Door
HD-SS-DR	Heavy-Duty Stainless Steel Door with Positive Latch Handle
LWALARM	Audible Low-Water Alarm
LPCAST	51 mm (2") Low Profile Casters in lieu of standard Casters (51 mm [2"] diameter with 76 mm [3"] clearance – overall height is 832 mm [32¾"])
4LEGS	102 mm (4") Adjustable Legs in lieu of standard Casters
6SS	152 mm (6") Stainless Steel Legs in lieu of standard Casters
7-1-STACK	Silver Gray Stacking Hardware mounted to top of Cabinet for two (2) FSHC-7-1 units in lieu of Casters
CORDWIND	Bracket for holding Cord during transport



ACCESSORIES (available for purchase at any time)

SLIDEWIRE	Wire Shelf
------------------	------------

FOOD PANS AND TRIVETS – PAGE 18
COLORS AND FINISHES – PAGE 18



SLIDEWIRE
Accessory

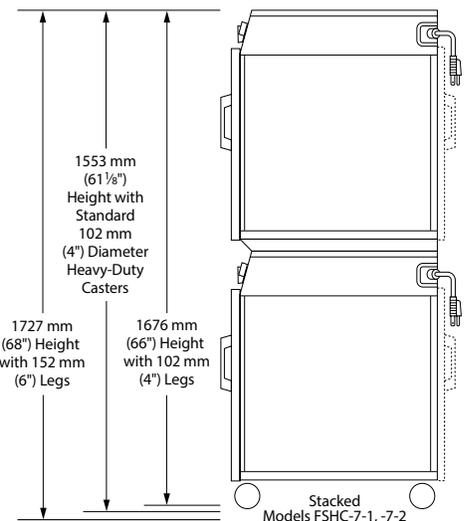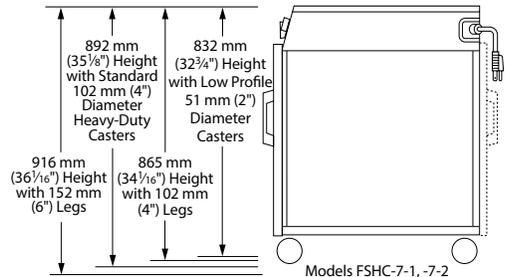

ALL FLAV-R-SAVOR® METAL-SHEATHED AIR HEATING ELEMENTS WARRANTED AGAINST BURNOUT AND BREAKAGE FOR TWO (2) YEARS.

FSHC-7-X
Flav-R-Savor Humidified Holding Cabinet
Number of Doors
Quantity of Shelves

Flav-R-Savor® Tall Humidified Holding Cabinets

The expanded capacity of Hatco's Tall Humidified Cabinets offers flexibility – giving customers more variety of menu items, and holding larger quantities of proven favorites ahead of peak serving periods. The universal slides of the FSHC-17W models will hold seventeen (17) sheet pans, or thirty-four (34) steam table pans. FSHC-12W models will hold twelve (12) sheet pans and twenty-four (24) steam table pans.

- Electronic controls with digital readout temperature range of 26°-93°C (80°-200°F) with precise heat and humidity settings assure uniform heating throughout the cabinet
- Using the lower temperature range of 26°-38°C (80°-100°F) allows perfect temperature for proofing all types of bread
- Lexan® or stainless steel doors, full height, half height and pass through available
- All stainless steel interior and exterior
- Fully insulated doors, sidewalls, base and top assist in heat retention and quick recovery
- Field reversible, right- or left-hand hinged doors with magnetic latch and heavy-duty plated hinges
- Fully welded tubular frame assures integrity of unit in any working environment



FSHC-12W1
with optional
Stainless Steel door



FSHC-17W1

TALL HUMIDIFIED HOLDING CABINETS

Model†	Description	Dimensions W x D x H*	Ship Weight
FSHC-12W1	Single Lexan® Door	660 x 887 x 1448 mm (26" x 34¾" x 57¾")	138 kg (303 lbs.)
FSHC-12W2	2 Lexan® Doors – Pass-Through	660 x 898 x 1448 mm (26" x 35⅝" x 57¾")	143 kg (316 lbs.)
FSHC-17W1	Single Lexan® Door	660 x 887 x 1862 mm (26" x 34¾" x 73⅝")	160 kg (352 lbs.)
FSHC-17W1D	Single Opening w/ 2 Dutch Doors	660 x 887 x 1862 mm (26" x 34¾" x 73⅝")	154 kg (340 lbs.)
FSHC-17W2	2 Lexan® Doors – Pass-Through	660 x 898 x 1862 mm (26" x 35⅝" x 73⅝")	154 kg (340 lbs.)
FSHC-17W2D	4 Dutch Doors – Pass-Through	660 x 898 x 1862 mm (26" x 35⅝" x 73⅝")	177 kg (389 lbs.)

† 220V, 240V not available with CE Mark.

All Tall Humidified Holding Cabinet Models Feature:

Voltage: 120, 50/60Hz, 1650 watts; or 220, 50/60Hz, 1800 watts; or 240, 50/60Hz, 2133 watts, single phase.

Cabinet Opening Dimensions: **FSHC-12W:** 559 W x 1105 H mm (22" x 43½").

FSHC-17W: 559 W x 1518 H mm (22" x 59¾").

Models Shipped with: 127 mm (5") casters (2 swivel with wheel locks and 2 rigid), universal slides for 457 x 660 mm (18" x 26") pans or 305 x 508 mm (12" x 20") pans.

Pan Capacity – FSHC-12W: 12-sheet pan capacity on 76 mm (3") centers, adjustable on 38 mm (1½") centers, with twelve (12) universal pan slides, designed to accommodate up to twelve (12) sheet pans or up to twenty-four (24) steam table pans.

Pan Capacity – FSHC-17W: 17-sheet pan capacity on 76 mm (3") centers, adjustable on 38 mm (1½") centers, with seventeen (17) universal pan slides, designed to accommodate up to seventeen (17) sheet pans or up to thirty-four (34) steam table pans.


Water Reservoir Capacity for Humidity System: 8 liters (2 gallons).

Cord Location: Facing controls, right-hand side panel, lower right corner.

OPTIONS AND ACCESSORIES – PAGE 16

WATER QUALITY REQUIREMENTS – PAGE 18

ALL FLAV-R-SAVOR® METAL-SHEATHED AIR HEATING ELEMENTS
WARRANTED AGAINST BURNOUT AND BREAKAGE FOR TWO (2) YEARS.

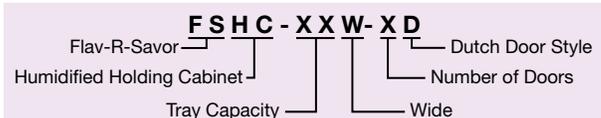



FSHC-17W1

OPTIONS (available at time of purchase only)

DELUXE	Deluxe Package (includes Flush Mount Handles and Full Perimeter Bumper)
TRANS	Transport Package (includes Stand-Off Handles, Full Perimeter Bumper, Heavy-Duty 27 x 51 mm [5" x 2"] Casters [two (2) swivel with wheel locks and two (2) rigid] and Flush Mount Transport Latch)
CORDUP	Upper Cord Location
CORDWIND	Bracket for holding Cord during transport (only available with Transport Package option for FSHC-12W and FSHC-17W models)
12W-SS-DOOR	Stainless Steel Door in lieu of Lexan® Door for FSHC-12W models
17W-SS-DOOR	Stainless Steel Door in lieu of Lexan® Door for FSHC-17W models
17WD-SS-DOOR	Stainless Steel Dutch Doors in lieu of Lexan® Dutch Doors for FSHC-17W models only

ACCESSORIES (available for purchase at any time)

17W-SLIDE	Extra Pan Slides (FSHC-12W and FSHC-17W models)
------------------	-------------------------------------------------

FOOD PANS AND TRIVETS – PAGE 18



17W-SLIDE
Accessory

Flav-R-Savor® Heated Air Curtain Cabinets

The patented Flav-R-Savor® Heated Air Curtain Cabinet effectively and safely holds hot food hot without the use of doors, allowing immediate access to product. Warm air at the front of the cabinet is forced downward, through the ducts above the opening, forming a “curtain” of heated air. A portion of the heated air is drawn toward the rear of the cabinet, warming each pan.

- Perfect for holding wrapped or sealed product like tortillas, burritos and ribs, as well as product on sheet pans like biscuits, hamburger patties and baked potatoes or fried foods in pans
- Available in 2-pan and 3-pan models, single opening or pass-through, with or without humidity
- Standard units hold one half-size sheet pan per shelf, and the 2-pan pass-through accommodates two full-size sheet pans
- Easy to use digital controls, a lighted On/Off switch and a 6’ cord & plug set



FSHACH-2 with accessory food pans



FS2HACH-2PT with accessory food pans

HEATED AIR CURTAIN CABINETS

Model	Description	Dimensions (W x D x H) <i>Height includes 4" legs</i>	Cabinet Opening Dimensions (W x H)	Ship Weight
FSHAC-2	2-Tier Warmer	257 x 581 x 460 (20 ¹ / ₈ " x 22 ⁷ / ₈ " x 18 ¹ / ₈ ")	464 x 232 mm (18 ¹ / ₄ " x 9 ¹ / ₈ ")	45 kg (100 lbs.)
FSHAC-3*	3-Tier Warmer	257 x 581 x 775 (20 ¹ / ₈ " x 22 ⁷ / ₈ " x 30 ¹ / ₂ ")	464 x 460 mm (18 ¹ / ₄ " x 18 ¹ / ₈ ")	52 kg (115 lbs.)
FS2HAC-2PT*	2-Tier Pass-Through	613 x 994 x 468 (24 ¹ / ₈ " x 39 ³ / ₈ " x 18 ¹ / ₂ ")	459 x 206 mm (18 ¹ / ₁₆ " x 8 ¹ / ₈ ")	79 kg (175 lbs.)
FS2HAC-4PT*	4-Tier Pass-Through	613 x 994 x 671 (24 ¹ / ₈ " x 39 ³ / ₈ " x 26 ¹ / ₂ ")	464 x 410 mm (18 ¹ / ₄ " x 16 ¹ / ₈ ")	96 kg (211 lbs.)

‡ 220V, 240V available with CE Mark.

* 120V models not available.

All Heated Air Curtain Cabinet Models Feature:

Voltage: FSHAC-2, -3: 120 or 120/208 50/60 Hz; and 220 or 240, 50 Hz, 1877 watts.

FS2HAC-2PT: 120/208, 220 or 240, 60 Hz; and 220 or 240, 50 Hz, 2589 watts.

FS2HAC-4PT: 120/208, 220 or 240, 60 Hz; and 220 or 240, 50 Hz, 3389 watts.

Cord Location: FSHAC-2, -3: Top of unit towards the back, middle.

FS2HAC-2PT, -4PT: Top of unit towards the back, left side.

HEATED AIR CURTAIN CABINETS – HUMIDIFIED

Model	Description	Dimensions (W x D x H) <i>Height includes 4" legs</i>	Cabinet Opening Dimensions (W x H)	Ship Weight
FSHACH-2	2-Tier Warmer	257 x 581 x 460 (20 ¹ / ₈ " x 22 ⁷ / ₈ " x 18 ¹ / ₈ ")	464 x 232 mm (18 ¹ / ₄ " x 9 ¹ / ₈ ")	45 kg (100 lbs.)

All Humidified Heated Air Curtain Cabinet Models Feature:

Voltage: 120/208, 60 Hz, 2950 watts.

Models Shipped with: Auto-fill water reservoir, water filter and cord with NEMA L6-30P plug.

Water Tank Capacity for Humidity System: 9 liters (2¹/₄ gallons).


Cord Location: Top of unit towards the back, middle.

ACCESSORIES (available for purchase at any time)

4" LEGS 102 mm (4") Legs (standard on 3-tier models)

FOOD PANS AND TRIVETS – PAGE 18
COLORS AND FINISHES – PAGE 18

ALL FLAV-R-SAVOR® METAL-SHEATHED AIR HEATING ELEMENTS WARRANTED AGAINST BURNOUT AND BREAKAGE FOR TWO (2) YEARS.

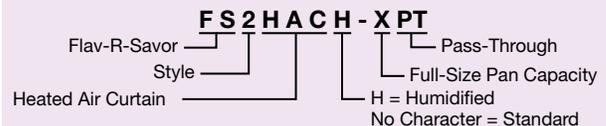



Food Pans And Trivets




PIZZA PANS
14\" PIZZA PAN
16\" PIZZA PAN
18\" PIZZA PAN



ST PANS
ST PAN 1/3
ST PAN 1/2
ST PAN 2
ST PAN 4

FOOD PANS

Model	Description
ALUM PAN	Half-Size Sheet Pan – 457 W x 330 D mm (18" x 13")
18\" SHEET PAN	Full-Size Sheet Pan – 457 W x 660 D mm (18" x 26")
14\" PIZZA PAN	Perforated Pizza Pan – 356 mm (14") Diameter
16\" PIZZA PAN	Perforated Pizza Pan – 406 mm (16") Diameter
18\" PIZZA PAN	Perforated Pizza Pan – 457 mm (18") Diameter
ST PAN 1/3	Third-Size Stainless Steel Pan – 324 W x 175 D x 64 H mm (12 3/4" x 6 7/8" x 2 1/2")
ST PAN 1/2	Half-Size Stainless Steel Pan – 324 W x 264 D x 64 H mm (12 3/4" x 10 3/8" D x 2 1/2")
ST PAN 2	Full-Size Stainless Steel Pan – 324 W x 527 D x 64 H mm (12 3/4" x 20 3/4" x 2 1/2")
ST PAN 4	Full-Size Stainless Steel Pan – 324 W x 527 D x 102 H mm (12 3/4" x 20 3/4" x 4")

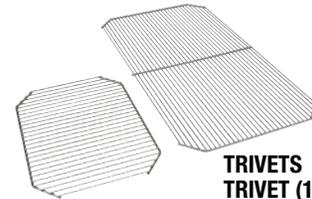

TRIVETS
TRIVET (1/2)SS
TRIVET SS

TRIVETS

Model	Description
Wire Trivets Stainless –	
TRIVET (1/2)SS	Half-Size – 259 W x 194 D mm (10 3/16" x 7 5/8")
TRIVET SS	Full-Size – 257 W x 457 D mm (10 1/8" x 18")

Water Quality Requirements

Water supply in excess of 3.0 grains of hardness per gallon (GPG) must be treated and softened before being used. Water containing over 3.0 GPG will decrease the efficiency and reduce the operating life of the unit.

NOTE: Product failure caused by liming or sediment buildup is not covered under warranty.

Paint Chip Sample Colors

DESIGNER COLORS



Colors are a representation and may not exactly match our colors. Consult factory for possible color matching options on these colors. Non-standard colors are non-returnable.

To order a Hatco Paint Chip & Stone Sample Colors Sheet, visit www.hatcocorp.com / Order Literature / Sales Literature / Sell Sheets.



Scan with web-enabled
mobile device to visit
www.hatcocorp.com

Hatco Corporation

P.O. BOX 340500 | Milwaukee, WI 53234-0500 USA

800-558-0607 | 414-671-6350

www.hatcocorp.com | support@hatcocorp.com