

Hydro H957A Dishwasher



Overview

Classeq was founded in 1977 and became a fully owned subsidiary of Winterhalter in March 2004. Classeq is manufactured in the United Kingdom at our factory in Hixon.

Features

- 1 ½ & 3 minute wash cycle
- 500mm x 500mm basket
- Simple two touch control panel operation
- High volume Dishwasher
- Optional chemical dispensers
- Optional Integral Water Softener
- Drain Pump
- Integral Approved Air Gap - WRC
- Built in Rinse Booster Pump
- Triple Action Automatic Self Drain & Clean Down Programme
- Continuous Hood Clean System
- Single piece wash arms provide highly effective wash action
- Removable basket guides
- Heavy duty easy to use controls
- Primary and secondary protective filter system
- 30 amp single phase or 16 amp three phase



Benefits


- Easy to operate
- Easy to Clean
- Eco friendly
- Integral Softener ensures continuous washing cycles between salt replenishment
- Accurate, automatic and safe dosing of chemicals
- Secondary protective filter system ensures cleaner water for longer periods which reduces water and chemical consumption
- Continuous Hood Clean System ensures the interior of the hood is hygienically clean at all times

Accessories

- External Water Softener
- Salt (Granulated)
- Additional baskets
- Super Clean Dishwashing Detergent
- Super Clean Dishwashing Rinse Aid



Hydro H857A Dishwasher

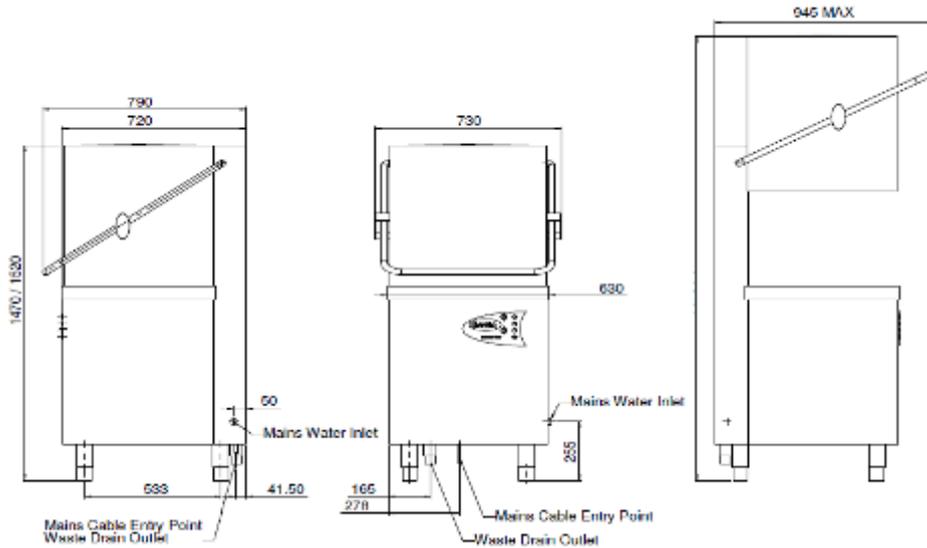

Dimensions

- Width 630 mm
- Depth 720 mm
- Height – hood closed 1470 - 1520 mm
- Height – hood open 1890 - 1940 mm
- Maximum clear entry height 385 mm

Water Connection & Drainage

- Hot water mains potable supply ¼ BSP Isolator
- Water Supply Temperature 60 C maximum
- Water Inlet from floor level 265 – 315 mm
- Water Pressure Min 2.0 / Max 6.0 Bar
- Required Water Flow 8 litres/minute
- Drain Type Pumped
- Drain Size 40 mm

Electrical Connection

- Operating Voltage 380-415AC/50/3/N Standard
- Total Connected Load 9.48 kW
- Amps required – 3 phase 17 Amps

Performance

- Wash Tank Heating 4.05 kW
- Rinse Boiler Heating 8.64 kW
- Wash Pump Size 0.74 kW
- Wash Pump Capacity 380 litres/minute
- Wash Tank Capacity 39 litres
- Wash Tank Operating Temperature 55 C
- Rinse Boiler capacity 7.5 litres
- Rinse Boiler Operating Temperature 80 C
- Rinse water Consumption (@2 Bar) 3.25 litres
- Maximum Stand Pipe Height from floor 700 mm

Weight

- Packed 140 kg
- Unpacked 130 kg



Classeq, Roebuck Way, Knowlhill, Milton Keynes, MK5 8WH.
 Telephone: 00 44 (0) 844 225 9250 Fax: 00 44 (0)844 225 9251
 Email: sales@classeq.co.uk www.classeq.co.uk

Part of the Winterhalter
 group of companies