



FOCUS

WORLD CLASS
INNOVATION

FEATURES

- Environmentally friendly
- Low service costs
- Perfect view to the products
- Custom made design
- Long life
- Available in all climate classes
- Graphics (option)
- Minimum icebuild-up
- Designed for transport
- Eye Catching design
- LED internal light (option)
- 75 mm insulation
- Accessories including baskets - see page 70

The new FOCUS freezer has an elegant, yet robust, design to optimally catch the attention of your customers. The lid design, the improved insulation and the heated frame ensure minimum ice build-up.

Cyclopentane is used as blowing agent and the cabinets are CFC free.



FOCUS 73 GREY



FOCUS 106 BLUE



FOCUS 131 RED



FOCUS 151 RED




FOCUS 171 BLUE

THINK GREEN

SAVE UP TO 30% ENERGY

Elcold is introducing a new line of freezers with sloping lids: The FOCUS. The FOCUS freezer is designed to match the requests and demands from the ice cream and frozen foods industries. Therefore, attention has been on developing a freezer which is environmentally friendly throughout its complete life cycle, keeping total life cycle costs as low as possible.

Energy consumption reduced by up to 30% (Tested according to EN441)

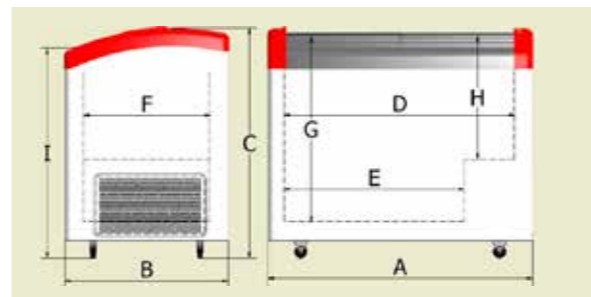

Dimensions according to technical datas below



	FOCUS 73	FOCUS 106	FOCUS 131	FOCUS 151	FOCUS 171
Climate class 4	4	4	4	4	4
Ambient temperature (Celsius)	+16 to +30	+16 to +30	+16 to +30	+16 to +30	+16 to +30
Climate class 4+	7(=4+)	7(=4+)	7(=4+)	7(=4+)	7(=4+)
Ambient temperature (Celsius)	+16 to +35	+16 to +35	+16 to +35	+16 to +35	+16 to +35
Gross volume, litres	161	270	352	418	484
Net volume, litres	113	193	254	302	351
Gross volume, cu. Ft.	5,8	9,6	12,6	14,9	17,3
Net volume, cu. Ft.	4	6,9	9,1	10,8	12,5
Temperature range inside unit (Celsius)	-14 to -23	-14 to -23	-14 to -23	-14 to -23	-14 to -23
Refrigerants available: R134a/R290/R404a/R600a	Yes	Yes	Yes	Yes	Yes
Energy consumption/24 h (R600a) climate class 4 (kwh)	2,2	2,5	2,8	3,7	4,4
Energy consumption/24 h (R134a) climate class 4 (kwh)	2,5	2,9	3,2	4,5	5,1
Input power for R134a (watt)	141	166	211	420	290
DIMENSIONS					
External dimensions (wxdxh)	726*656*850	1056*656*850	1306*656*850	1506*656*850	1706*656*850
Internal dimensions (wxdxh)	570*500*670	900*500*670	1150*500*670	1350*500*670	1550*500*670
Dimension A	726	1056	1306	1506	1706
Dimension B	656	656	656	656	656
Dimension C	850	850	850	850	850
Dimension D	570	900	1150	1350	1550
Dimension E	370	700	950	1150	1350
Dimension F	500	500	500	500	500
Dimension G	670	670	670	670	670
Dimension H	420	420	420	420	420
Dimension I	780	780	780	780	780
Insulation mm	75	75	75	75	75
ACCESSORIES					
Dividers	Optional	Optional	Optional	Optional	Optional
Max. number of baskets (option)*	3	4	5	6	7
Castors	Incl.	Incl.	Incl.	Incl.	Incl.
Castors w. brakes	Optional	Optional	Optional	Optional	Optional
Lock	Optional	Optional	Optional	Optional	Optional
Thermometer	Optional	Optional	Optional	Optional	Optional
Internal light	Optional	Optional	Optional	Optional	Optional
Outer cabinet	White	White	White	White	White
Inner cabinet	Aluminium	Aluminium	Aluminium	Aluminium	Aluminium
Steel inner liner	Option	Option	Option	Option	Option
Graphics	Optional	Optional	Optional	Optional	Optional
OTHER DATA					
Type of cooling	Static	Static	Static	Static	Static
Type of defrost	Manual	Manual	Manual	Manual	Manual
Power	220V/50Hz	220V/50Hz	220V/50Hz	220V/50Hz	220V/50Hz
Power 110volt/60 hz	Optional	Optional	Optional	Optional	Optional
Thermostat	Mechanical	Mechanical	Mechanical	Mechanical	Mechanical
Net weight, kg	44	54	62	68	73
Gross weight, kg	47	58	66	73	79
SHIPPING					
20' cont. Capacity	42	30	24	20	18
40' cont. Capacity	90	64	50	46	40
40' HC cont. Capacity	135	96	75	68	59
Standard Trailer capacity	153	108	90	75	66



S-DISPLAY