

Packed Depth cm





F72/210 - IMC VQ7 Counter-top Potato Peeler - 1 Phase - W 500 mm - 0.18 kW Compact and flexible, the VQ7 peeler has a high output and small footprint, making it ideal for smaller kitchens with single-phase power.

- Able to peel 90kg of potatoes per hour, in 7kg batches
- Small footprint and quiet operation, ideal for smaller kitchens
- Compact design for countertops and sink drainers
- Heavy-duty belt and pulley for simple and safe operation
- Self-draining cylinder with smooth profile for easy cleaning
- Long-lasting, rust-proof cast aluminium plate for effective peeling
- Suitable for kitchens with single-phase power supply
- WRAS-compliant Class A air-break and brass spray nozzle to prevent water escape

| Arrand MC VO Peeller VO Peeller HP 0.24 Alange VO Peeller HP Rating HP 0.24 Alange VO Peeller HP Rating HP Rating HP S5 Alange MP S5 Al | | | | |
|--|---------------------------|-------------------------------------|-------------------------------|---------------------|
| Range V0 Peeler HP 0.24 Power Type Electric PRating P55 Unit Type Counter-top Available in UK Only No UK Warranty 2 Years Parts and Labour Warranty Export Warranty Contact your local dealer Peeds tall Copt | Summary | | Power and Performance | |
| Power Type Unit Type Counter-top Variable in UK Only UK Warranty Export Warranty Contact your local dealer Drainer: Workfoor: Stand [optional]: Pedestal [opti Forestal [op | Brand | IMC | Total Power kW | 0.18 |
| Unit Type Available in UK Only LK Warranty Export Warranty Contact your local dealer Mounting Pedestal Cpti GTIN Coperator Safety Interlocks WRAS Compliant Airbreak Weights and Dimensions Weights (External) mm Unit Wdift (External) mm Not Weight (External) mm Not Weight Kg Unit Depth (External) mm Not Weight Kg Not Weight Kg Space Unit Depth (External) mm Not Weight Kg Not Weight Kg Space Unit Depth (External) mm Not Weight Kg Not Weight Kg Space Unit Depth (External) mm Not Weight Kg Motor Rating Watts Single Phase Amps 1.2 Single Phase Voltage 230 Single Phase Voltage 230 Water Connection Water Connection Unit multivities Water Connection Unit Water Connection Space Water Connection Unit Water Connection Unit Water Connection Unit Connection Unit Water Connection Unit Water Connection Unit Water Connection Unit Water Connection Unit Connection Unit Water C | lange | VQ Peeler | НР | 0.24 |
| Available in UK Only UK Warranty 2 Years Parts and Labour Warranty Export Warranty Contact your local dealer Mounting Predestal [opti GTIN 5056105198871 Key Specifications Capacity Operator Safety Interlocks Yes Operator Safety Variable WRAS Compliant Airbreak Weights and Dimensions Wards Compliant Vers Unit Height (External) mm 653 Requires Installation No Unit Width (External) mm 867 UK 3 Pin Plug Unit Depth (External) mm 867 UK 3 Pin Plug Weight Kg Single Phase Voltage Water Connection Pressure Bar Variable Water Connection Variable Water Connection Shipping Packed Weight Kg 31.5 Packed Height Cm 81 82 84 85 85 86 86 86 86 86 86 86 86 | ower Type | Electric | IP Rating | IP55 |
| Export Warranty 2 Years Parts and Labour Warranty Contact your local dealer | Init Type | Counter-top | | |
| Export Warranty Mounting Pedestal (poti 5056105198871 Key Specifications Capacity Operator Safety Interlocks Yes Drain Location WRAS Approved Airbreak Yes Unit Height (External) mm 1563 Unit Depth (External) mm 1567 Net Weight Kg 1579 Net Weight Kg 29 Requires Hardwiring Motor Rating Watts Single Phase Voltage Single Phase Voltage Single Phase Voltage Water Connection Water Connection Shipping Packed Weight Kg 31.5 Packed Height cm So56105198871 Capacity Capacity Capacity Capacity Capacity Capacity Capacity Capacity Capacity Saper Hour 90 Population 90 Capacity Kg per Hour 90 Population Population 90 Requires Installation No | vailable in UK Only | No | | |
| Mounting Drainer: Worktop: Stand [optional]* Pedestal [opti 5056105198871 Key Specifications Capacity Operator Safety Interlocks Yes Unit Approved WRAS Compliant Akirbreak Yes Weights and Dimensions Supply Connections Unit Height (External) mm 500 Requires Installation No Unit Width (External) mm 653 Requires Installation No Unit Width (External) mm 367 UK 3 Pin Plug Yes Net Weight Kg 29 Requires Hardwiring No Motor Rating Watts 180 Single Phase Amps 1.2 Single Phase Amps 1.2 Single Phase Amps 2.7-3.8 [40-65 psi] Drain Connection Tessure Bar 2.7-3.8 [40-65 psi] Drain Connection 12mm Shipping Packed Weight Kg 31.5 Packed Height cm 56 | IK Warranty | 2 Years Parts and Labour Warranty | | |
| Pedestal [opti 5056105198871 | xport Warranty | Contact your local dealer | | |
| Fedestal lopti 5056105198871 Key Specifications Capacity Operator Safety Interlocks Yes Drain Location Variable WRAS Approved Alrbreak Yes Weights and Dimensions Weights and Dimensions Unit Height (External) mm 500 Requires Installation No Unit Width (External) mm 653 Requires Electrical Supply Yes Unit Opeth (External) mm 367 UK 3 Pin Plug Yes Net Weight Kg 29 Requires Hardwiring No Motor Rating Watts 180 Single Phase Voltage 230 Water Connection Pressure Bar 2.7-3.8 [40-55 psi] Drain Connection 50.8mm Water Connection 50.8mm | lounting | Drainer; Worktop; Stand [optional]; | | |
| Capacity Operator Safety Timer Yes Drain Location WRAS Approved Airbreak Weights and Dimensions Unit Height (External) mm Unit Width (External) mm Soff Weight Kg Single Phase Amps Single Phase Voltage Water Connection Water Connection Shipping Packed Weight Kg Packed Height Cm Sapacity Capacity Capacity Capacity Capacity Capacity Capacity Capacity Capacity Capacity Sapacity Kg per Hour 90 No Requires Installation No Requires Installation No | lounting | Pedestal [opti | | |
| Operator Safety Timer Yes Drain Location WRAS Approved Airbreak WRAS Compliant Airbreak Weights and Dimensions Unit Height (External) mm 653 Requires Installation No Unit Width (External) mm 367 UK 3 Pin Plug Yes Weight Kg 49 Requires Hardwiring Motor Rating Watts Single Phase Amps 1.2 Single Phase Amps 1.2 Single Phase Voltage Water Connection Water Connection Shipping Packed Weight Kg 31.5 Packed Height cm 56 Agacity Kg per Hour 90 Application Application No Application No No Motor Requires Installation No Application No Motor Rating Watts 180 Single Phase Amps 1.2 Single Phase Voltage 230 Water Connection Pressure Bar Drain Connection Water Connection Water Connection Drain Connection Water Connec | STIN | 5056105198871 | | |
| Timer Yes Drain Location Variable WRAS Approved WRAS Compliant Airbreak Yes Weights and Dimensions Weight (External) mm 500 Requires Installation No Unit Width (External) mm 653 Requires Electrical Supply Yes Unit Depth (External) mm 367 UK 3 Pin Plug Yes Net Weight Kg 29 Requires Hardwiring No Motor Rating Watts 180 Single Phase Amps 1.2 Single Phase Amps 1.2 Single Phase Amps 230 Water Connection Pressure Bar 2.7-3.8 [40-55 psi] Drain Connection 50.8 mm Water Connection 12 mm Shipping Packed Weight Kg 31.5 Packed Height cm 56 | (ey Specifications | | Capacity | |
| Drain Location WRAS Approved Airbreak Weights and Dimensions Weights and Dimensions Supply Connections Weight (External) mm Unit Height (External) mm 653 Requires Installation No UK 3 Pin Plug Yes Weight Kg Packed Weight Kg No Water Connection Pressure Bar Drain Connection Supply Connections Supply Connections Requires Electrical Supply Yes UK 3 Pin Plug No Motor Rating Watts Single Phase Amps 1.2 Single Phase Amps 1.2 Single Phase Voltage Water Connection Pressure Bar Drain Connection Sol.8mm Water Connection 12mm Shipping Packed Weight Kg 31.5 Packed Height cm 56 | perator Safety | Interlocks | Capacity Kg per Hour | 90 |
| WRAS Approved Airbreak Weights and Dimensions Unit Height (External) mm Unit Width (External) mm Soft Unit Depth (External) mm Net Weight Kg Was Pin Plug Water Connection Water Connection Shipping Packed Weight Kg 31.5 Packed Height cm Supply Connections Supply Connections Supply Connections No No No Motor Requires Installation No Mequires Electrical Supply Yes Requires Electrical Supply Yes No Motor Rating Watts 180 Single Phase Amps 1.2 Single Phase Voltage Water Connection Pressure Bar Drain Connection Water Connection 12mm | ïmer | Yes | | |
| Weights and Dimensions Unit Height (External) mm 500 Requires Installation No | rain Location | Variable | | |
| Weights and Dimensions Unit Height (External) mm Unit Width (External) mm 653 Requires Electrical Supply Yes Unit Depth (External) mm No Net Weight Kg 29 Requires Hardwiring Motor Rating Watts Single Phase Amps Single Phase Voltage Water Connection Pressure Bar Drain Connection Water Connection 12mm Shipping Packed Weight Kg 31.5 Packed Height cm 500 Requires Installation No No No Wes Weight Kg 100 No Water Connection No No No Water Connection 12mm | VRAS Approved | WRAS Compliant | | |
| Unit Height (External) mm 500 Requires Installation No Unit Width (External) mm 653 Requires Electrical Supply Yes Unit Depth (External) mm 367 UK 3 Pin Plug Yes Net Weight Kg 29 Requires Hardwiring Motor Rating Watts 180 Single Phase Amps 1.2 Single Phase Voltage 230 Water Connection Pressure Bar 2.7-3.8[40-55 psi] Drain Connection 50.8mm Water Connection 12mm Shipping Packed Weight Kg 31.5 Packed Height cm 56 | irbreak | Yes | | |
| Unit Width (External) mm 10 | Veights and Dimensions | | Supply Connections | |
| Unit Depth (External) mm Net Weight Kg 29 Requires Hardwiring Motor Rating Watts Single Phase Amps 1.2 Single Phase Voltage Water Connection Pressure Bar Drain Connection Water Connection 12mm Shipping Packed Weight Kg 31.5 Packed Height cm 367 UK 3 Pin Plug Yes No Water Gall Water Hardwiring No Water Shipping No Water Gall Water Connection 12mm Yes No No No No No Water Gall Water Connection 12mm Yes No No No No Water Gall Water Connection 12mm | Init Height (External) mm | 500 | Requires Installation | No |
| Net Weight Kg 29 Requires Hardwiring Motor Rating Watts Single Phase Amps 1.2 Single Phase Voltage Water Connection Pressure Bar Drain Connection Water Connection 12mm Shipping Packed Weight Kg 31.5 Packed Height cm 80 No Motor Rating Watts 180 2.7-3.8[40-55 psi] Drain Connection Water Connection 12mm | Init Width (External) mm | 653 | Requires Electrical Supply | Yes |
| Motor Rating Watts Single Phase Amps 1.2 Single Phase Voltage 230 Water Connection Pressure Bar Drain Connection Water Connection 12mm Shipping Packed Weight Kg 31.5 Packed Height cm 56 | Init Depth (External) mm | 367 | UK 3 Pin Plug | Yes |
| Single Phase Amps 1.2 Single Phase Voltage 230 Water Connection Pressure Bar 2.7-3.8[40-55 psi] Drain Connection Water Connection 12mm Shipping Packed Weight Kg 31.5 Packed Height cm 56 | let Weight Kg | 29 | Requires Hardwiring | No |
| Single Phase Voltage 230 Water Connection Pressure Bar 2.7-3.8[40-55 psi] Drain Connection Water Connection 12mm Shipping Packed Weight Kg 31.5 Packed Height cm 56 | | | Motor Rating Watts | 180 |
| Water Connection Pressure Bar 2.7-3.8[40-55 psi] Drain Connection Water Connection 12mm Shipping Packed Weight Kg 31.5 Packed Height cm 56 | | | Single Phase Amps | 1.2 |
| Drain Connection 50.8mm Water Connection 12mm Shipping Packed Weight Kg 31.5 Packed Height cm 56 | | | Single Phase Voltage | 230 |
| Packed Weight Kg Packed Height cm 50.8mm Water Connection 12mm 50.8mm Water Connection 12mm | | | Water Connection Pressure Bar | 2.7-3.8 [40-55 psi] |
| Shipping Packed Weight Kg 31.5 Packed Height cm 56 | | | Drain Connection | |
| Packed Weight Kg 31.5 Packed Height cm 56 | | | Water Connection | 12mm |
| Packed Weight Kg 31.5 | Shinning | | | |
| Packed Height cm 56 | | | | |
| • | Annaland Malaulat I/au | 31 5 | | |
| | | | | |





Available Accessories

A29/003 Lid Retaining Strap for SP/VQ Potato Peeler


E72/011 Sink Skip - Stainless Steel - for MF10/MF15L/MF15L/VQ Peeler


S72/023 Waste Ejector for SP/VQ Potato Peeler [2" BSP]


\$72/220 Trolley for VQ Potato Peeler [H 890 mm]

\$72/221 Pedestal for VQ Potato Peeler [H 750/800/850/900/950 mm - adjustable]

Technical Picture





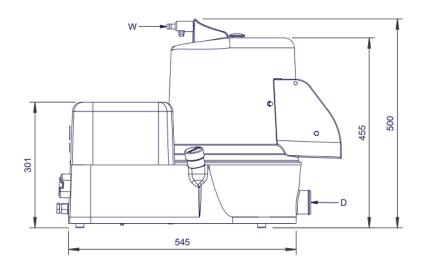







Lincat Limited

Whisby Road,

Lincoln, LN6 3QZ,

United Kingdom

Company No: 2175448

A member company of

Customer Care

Tel: +44 1522 875500

Email: care@lincat.co.uk

Export Customers

Tel: +44 1522 503250

Email: export@lincat.co.uk

Opening Hours

Monday - Friday:

8.30am - 5pm

