


Model:  
 XMD1875-P-FGD-K

Panoramic frameless glass door multideck  
 10 x 935mm shelves, undershelf LED lighting



## General Information

Prodis XMD1875-P-FGD-K panoramic framless glass door multideck finished in RAL9005 Jet Black.

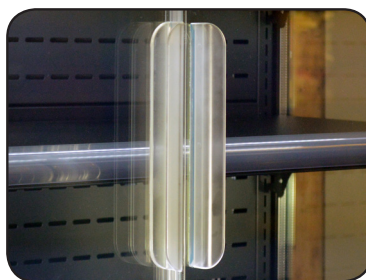

## Key Features

- 1°C to +5°C (3M1) temp. range
- Forced air refrigeration
- 10 x 450mm deep adjustable height and angle shelves
- 330mm base shelf
- 935mm shelf width
- (10) shelf edge ticket strips
- Undershelf LED lighting
- 1292/764 litre (gross/net) volume
- 4.05m<sup>2</sup> display area
- Self closing double glazed frameless doors with Low E treatment
- HMI digital temperature controller
- R290 refrigerant
- 13amp plug in cabinet

## Construction

- Painted steel construction
- RAL9005 Jet Black Interior and exterior
- 30mm panoramic Low E glazed end panel
- Slide out low maintenance condensing unit
- Steel front grill secured with neodymium magnets

## Energy Label



Prodis XMD1875-P-FGD-K



**2967** kWh/annum

**4.13** m<sup>2</sup>

5°C  
 -1°C

## Technical Data

Model	XMD1875-P-FGD-K
Color	Jet Black RAL9005
End panel	Panoramic Low E glass 30mm
Door style	Framless double glazed
Door handle	'L' shaped, frosted
Cabinet construction	Painted steel
Cabinet dimensions	1935 x 740 x 2010 (w,d,h mm)
End panel dimensions	30 x 740 x 2010 (w,d,h mm)
Shelf dimensions	935 x 450mm
Base dimensions	1875 x 330mm
Usable height	1540mm
Number of shelves	10 + base
Shelf angle adjustment	0° / 7° / 14°
Shelf edge ticket strips	10
Lighting	Undershelf LED (10) + top LED
Doors	3 (2 right hand, 1 left hand)
Glass	Double glazed Low E
Controller	Digital with light switch
Door dimensions	611 x 20 x 1653 (w,d,h mm)
Packaged dimensions	1965 x 767 x 2120 (w,d,h mm)
Net weight	370kg
Gross weight	420kg
Gross volume	1939 litres
Net volume	1147 litres
Total display area	4.05m <sup>2</sup>
System type	Plug-in
Temperature range	-1°C to +5°C 3M1
Climate class	3 (25°C; 60%RH)
Refrigerant	R290
Refrigerant charge	2 x 135 gram
Compressors	2
Evaporator fans	2
Condenser fans	4
Noise level	≤58 dB
Energy consumption	8.13 kWh / 24h
Rated power	980 W
Voltage	220V / 50Hz
Fuse requirements	2 x 13amp

**Prodis**

**XMD**  
PANORAMIC FRAMELESS GLASS DOOR MULTIDECK

Approvals

Available At

Document #

