

Storm Passthrough Dishwasher



FEATURES

- High grade 304 stainless steel construction
- Pressed tank and rounded corners to aid cleaning of machine
- Powerful wash performance using two high powered wash pumps
- AA Air gap-Integrated break tank to conform with water regulations
- Rotating wash and rinse arms removable for cleaning
- Fitted with detergent pump, rinse-aid pump, rinse booster pump, break tank and drain pump
- Stainless steel surface filters plus secondary filter to reduce blockages
- Automatic detergent and rinse aid dosing
- 3 cycles - 55 / 75 / 120 secs; plus a permanent wash function
- Configurable power supply, to suit either a 60A / 40A / 30A single phase or 20A 3 phase power supplies. **NOTE - The installer must supply and install the electrical supply cable to the machine**
- Supplied with 1x plate basket (holds 18 plates), 1 x cup basket, 2 x cutlery basket
- Can be configured to corner or straight configuration
- Auto start when hood is closed
- Adjustable feet



400mm
loading height


IMPORTANT NOTES

If you are installing a glass or dishwasher in a hard water area, we recommend you to fit a water softener. Faults attributed to poor water quality are not covered under the manufacturer's warranty.

One of the most compact depth (675mm) passthrough dishwashers on the market to enable it to replace most hood type dishwashers



Fitted with surface filter

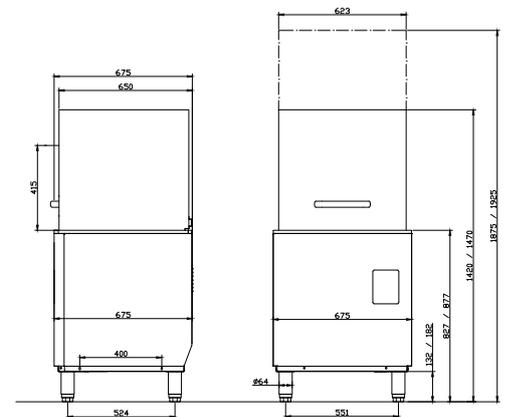

MODEL	BASKETS /HR	LOADING HEIGHT	WATER USAGE	BASKET SIZE (mm)	POWER CONSUMPTION	EXT. DIMENSIONS (H x W x D mm)	WEIGHT (kg)	RRP
STORM100BTDP	65*	400mm	3L	500 x 500	13.2KW	1440 x 675 x 675	124	
BZ-SIDE650	Dishwasher table - left /right or front fitting - 304 grade SS					850 x 650 x 633	-	
BZ-SIDE1250	Dishwasher table - left /right or front fitting - 304 grade SS					850 x 1250 x 633	-	
BZ-TROLLEY	Trolley for dishwasher baskets (Qty 3) 304 grade SS					750 x 560 x 560	-	

* based on full electrical power

