

## ELECTRIC GENERAL PURPOSE OVENS WITH DROP DOWN DOOR



E3117D GP Oven

### KEY FEATURES

- Drop-down door with 90° position hinge  
- *quick access to load and unload oven*
- Full depth worktop surface  
- *Extends kitchen working space*
- Vitreous enamelled oven chamber  
- *Easy to clean and to keep clean*
- Wide oven temperature range of 100 - 250°C  
- *Ideal to prepare a wide variety of food*
- 5 shelf positions allow 2 shelf cooking  
- *Versatile, ideal for a wide range of menu items*
- Low profile, full width door handle  
- *reduces intrusion into work space*
- Laser-etched control icons  
- *Permanent, indelible markings*

### MODELS and ACCESSORIES

**E3117D** - General purpose oven

**E3117D on Stand** - General purpose oven on stand

- Fully integrated extended flue
- Splashplate and plateshelf
- Oven shelf
- Factory fitted, adjustable castors
- Fixed installation kit
- Heat resistant insulated floorpad
- Suiting kit

### INSTALLATION NOTES

Adequate ventilation must be provided to supply sufficient fresh air and to allow easy removal of any such products that may present a risk to health. Please consult current legislation for details that relate to specific locations.

Install unit on a level, fireproof surface in a well-lit position. If floor is made of a combustible material, local fire requirements must be checked to ensure compliance.


A clearance of 150mm should be observed between appliance and any combustible wall.



## ELECTRIC GENERAL PURPOSE OVENS WITH DROP DOWN DOOR

### MODEL DIMENSIONS (in mm)

Heights of leg and  
castor models are identical

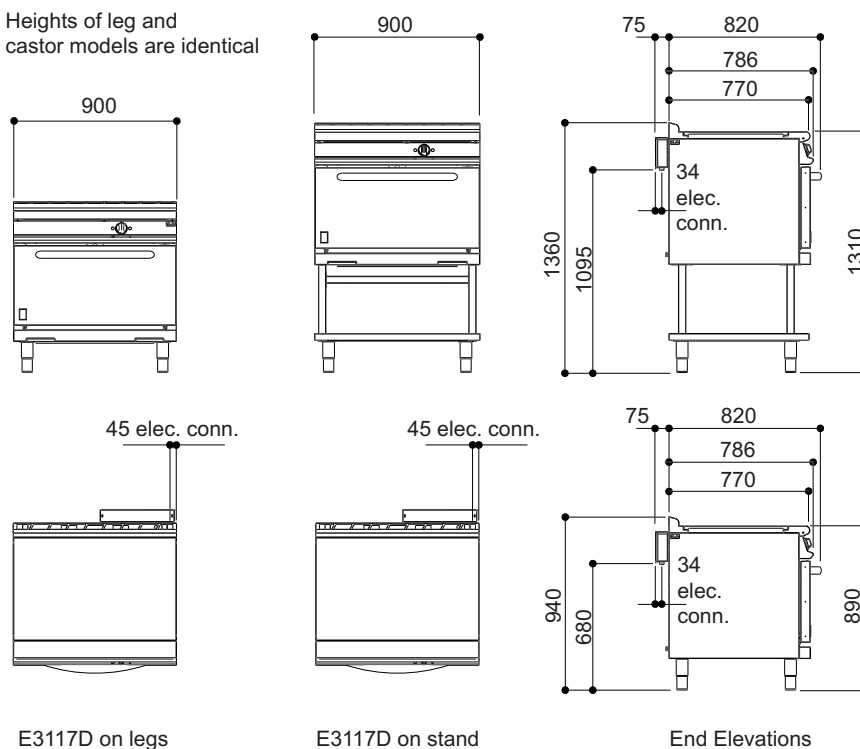

## SPECIFICATION DETAILS

	<b>E3117D</b>	<b>E3117D on stand</b>
Electrical rating ( <i>kW</i> )	5	5
Electrical supply voltage	230V~	230V~
Required electrical supply 230V ( <i>amps</i> )	30	30
Electrical current split ( <i>amps</i> )	L1: 22	L1: 22
Oven element rating ( <i>kW</i> )	5	5
Oven dimensions ( <i>w x d x h - mm</i> )	700 x 535 x 430	700 x 535 x 430
Oven shelf ( <i>w x d - mm</i> )	700 x 535	700 x 535
Gastronorm compatibility	2/1	2/1
Weight ( <i>kg</i> )	102	140
Packed weight ( <i>kg</i> )	120	158